

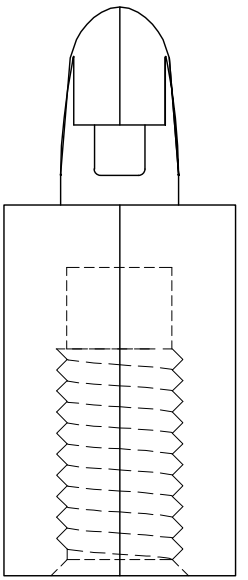


1
RoHS Compliance

7		8	
REV	SYM	Revision Record	Appr.
V0	KLS08052	New Version Release	Song
			Date
			2024-12-13

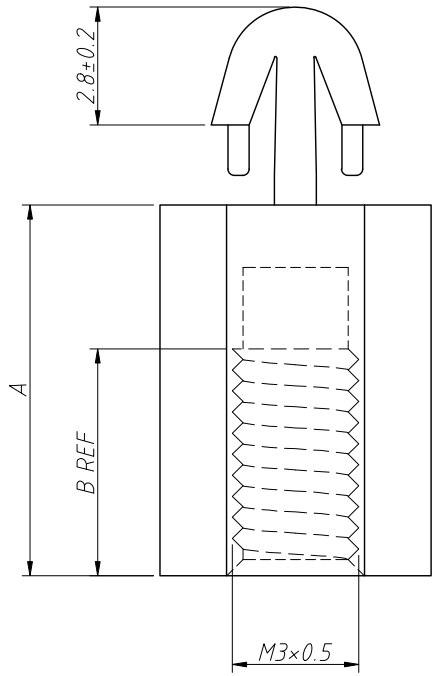

PCB Hole: $\phi 3.0$
PCB Thickness: 1.6mm

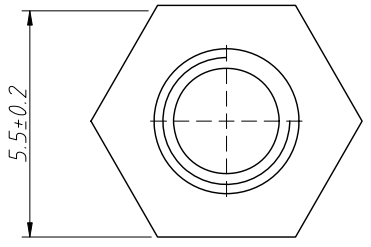

Notes:
1. Material: NYLON66, UL 94 V-2, Natural
2. Shrinking Is Normal Status
3. Made Of Equivalent Material

ITEM	A	B
0229B-BUT-05	5.0	3.0
0229B-BUT-06	6.0	4.0
0229B-BUT-07	7.0	
0229B-BUT-08	8.0	6.0
0229B-BUT-09	9.0	
0229B-BUT-10	10.0	
0229B-BUT-11	11.0	
0229B-BUT-12	12.0	
0229B-BUT-13	13.0	
0229B-BUT-14	14.0	
0229B-BUT-15	15.0	
0229B-BUT-16	16.0	
0229B-BUT-17	17.0	
0229B-BUT-18	18.0	
0229B-BUT-19	19.0	
0229B-BUT-20	20.0	
0229B-BUT-22	22.0	
0229B-BUT-23.5	23.5	
0229B-BUT-26	26.0	
0229B-BUT-26.5	26.5	
0229B-BUT-27	27.0	

ANGLE TOLERANCE	PROJECTION	Description:			
$\pm 3^\circ$		M3 Spacer Support			
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS8-0229B-BUT-XX	
.x ± 0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L.TD.	
.xx ± 0.20	Draw:	Song			2024-12-13
.xxx ± 0.10	Check:	Daniel			2024-12-13