

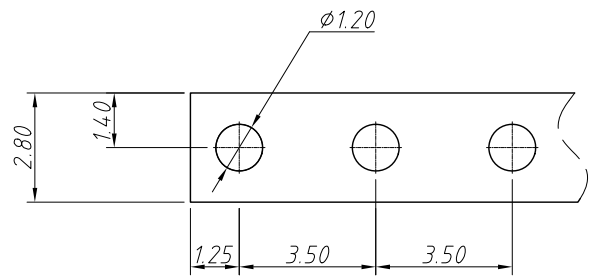


1  
RoHS Compliance

6	7	8
REV	SYM	Revision Record
V0	KLS02006	New Version Release
Appr.	WuHao	Date
		2024-09-23

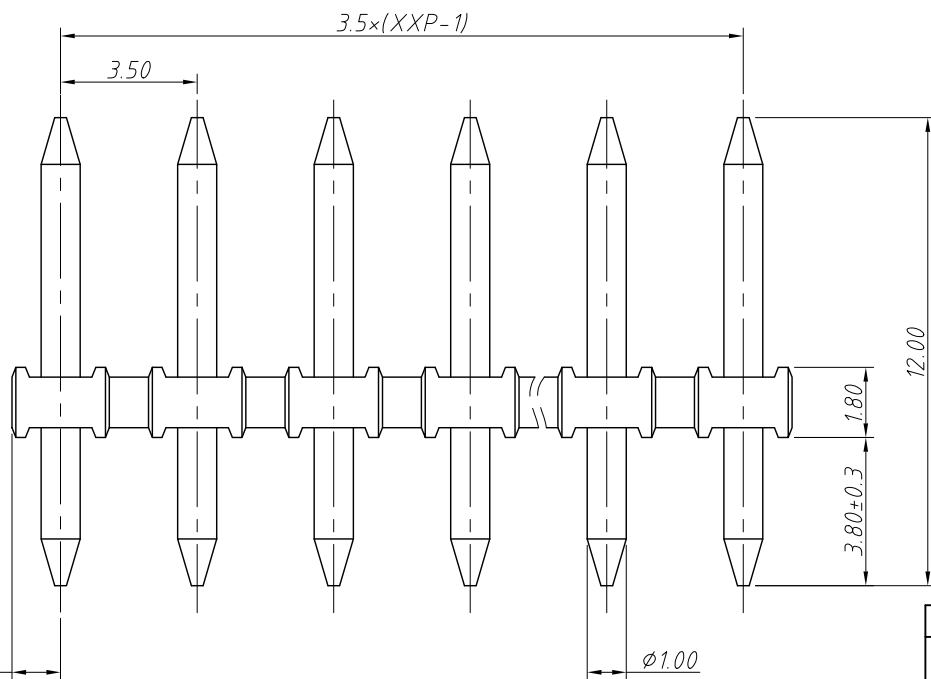

Recommended PCB Layout


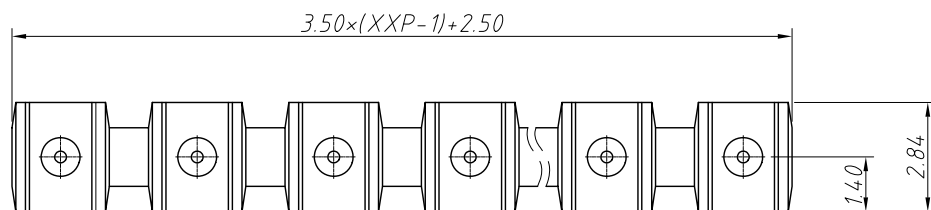


Electrical Characteristics	UL	IEC
Rated Voltage	300V	160V
Rated Current	8A	8A
Withstand Voltage	1600V / 1 min	2.5KV

Material and other:  
 Housing:PBT,UL 94V-0  
 Pin Header:Copper Alloy,Sn Plated  
 Operating temperatur:-30°C ~ +120°C

Order Information

L-KLS2-333J-3.50-XXP-X X

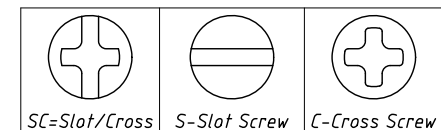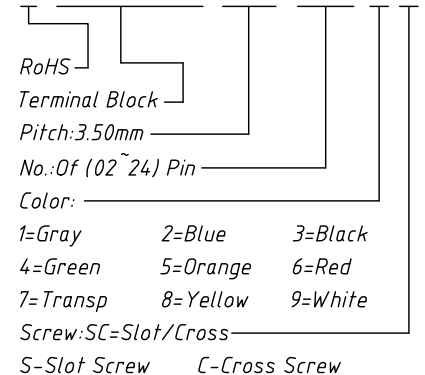

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 3.50mm Screw fixation Terminal Block
GENERAL TOLERANCE	UNITS	mm
0~30 ±0.50	SHEET SIZE	A4
30~60 ±0.75	Draw:	WuHao
60~90 ±1.00	Check:	Daniel
		2024-09-23
		2024-09-23



NingBo KLS ELECTRONIC CO.,L TD.