


1
RoHS Compliance





6	7	8
REV	SYM	Revision Record
V0	KLS08011	New Version Release
		Appr.
		Jenny
		Date
		2024-12-30



ITEM NO.	A	Upper Hole		Down Hole	
		∅ Hole	Thickness	∅ Hole	1.2~1.8
L-KLS8-0209-BSD-03	3.5	∅4.0	1.2~1.7	∅5.5	1.2~1.8
L-KLS8-0209-BSD-05	5.0	∅4.0	1.2~1.7	∅5.5	1.2~1.8
L-KLS8-0209-BSD-06	6.0	∅4.0	1.2~1.7	∅5.5	1.2~1.8
L-KLS8-0209-BSD-07	7.0	∅4.0	1.2~1.7	∅5.5	1.2~1.8
L-KLS8-0209-BSD-08	8.0	∅4.0	1.2~1.7	∅5.5	1.2~1.8
L-KLS8-0209-BSD-10	10.0	∅4.0	1.2~1.7	∅5.5	1.2~1.8
L-KLS8-0209-BSD-12	12.0	∅4.0	1.2~1.7	∅5.5	1.2~1.8
L-KLS8-0209-BSD-14	14.0	∅4.0	1.2~1.7	∅5.5	1.2~1.8
L-KLS8-0209-BSD-16	16.0	∅4.0	1.2~1.7	∅5.5	1.2~1.8
L-KLS8-0209-BSD-18	18.0	∅4.0	1.2~1.7	∅5.5	1.2~1.8

Notes:

1. Material: PA66, UL94V-2, Natural
2. Operating Temperature: 0°C ~ +80°C
3. The Appearance Shall Be Free Of Defects Such As Burrs, Shrinkage, Etc
4. This Product Does Not Contain Lead (Pb), Mercury (Hg), Pot (Cd), Hexavalent Inscription (Cr VI)
5. The Material Used In This Product Has A Water Absorption Of 2.5% After 24 Hours Immersion At A Temperature Of 23 °C And A Relative Humidity Of 50%
6. Boil water at 100°C ~ 110°C for 10 minutes
7. Withstand Voltage: 2500V/0.5mA/1m
8. Heat Resistance: B-130°C (30m without melting at 200 °C)

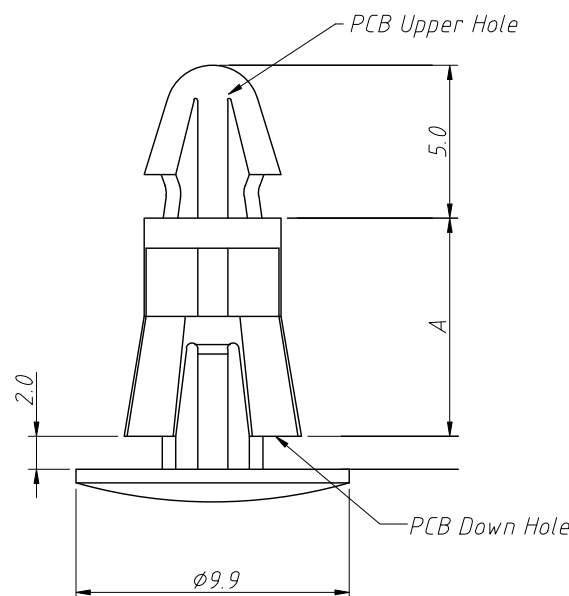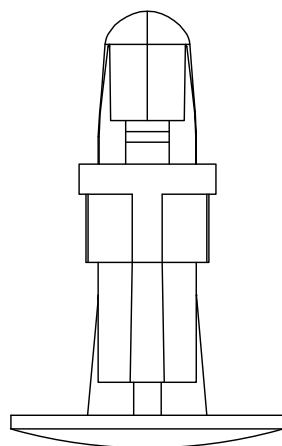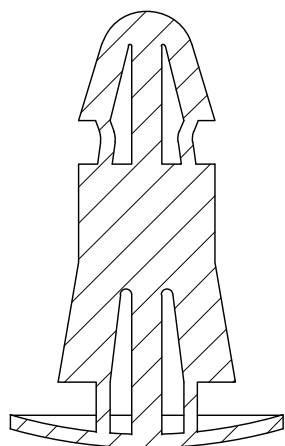

Unmarked	0~4	4~15	15~30	30~50	50~100	100~
Tolerance	±0.15	±0.2	±0.3	±0.5	±0.7	±1.0

ANGLE TOLERANCE	PROJECTION	Description:
±3°		PCB spacer supports
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	Jenny 2024-12-30
x.xxx ±0.10	Check:	Daniel 2024-12-30
		NingBo KLS ELECTRONIC CO.,L TD.