

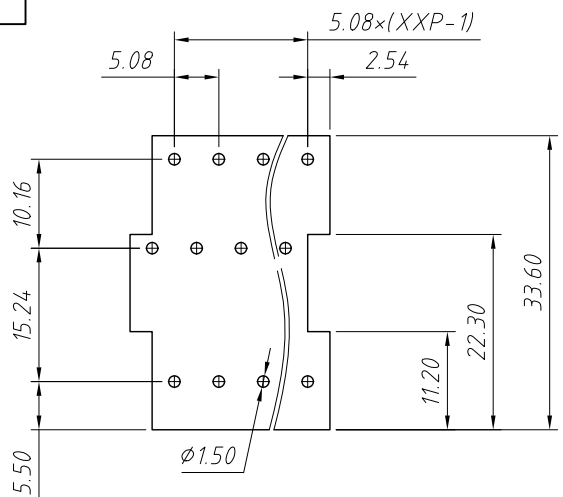
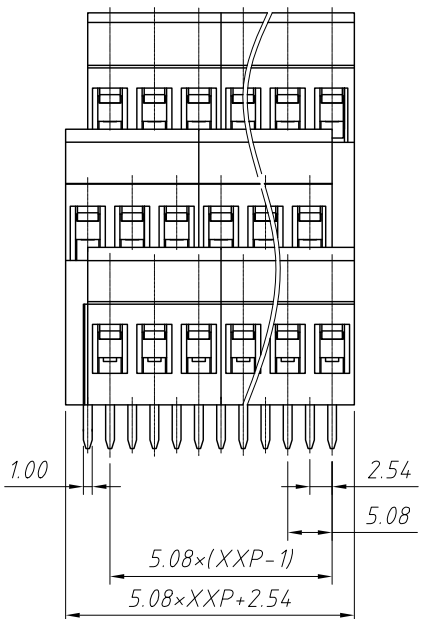


1 RoHS Compliance

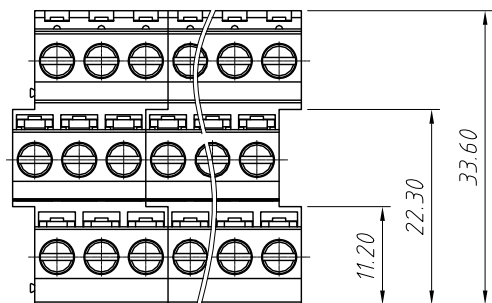

Recommended PCB Layout

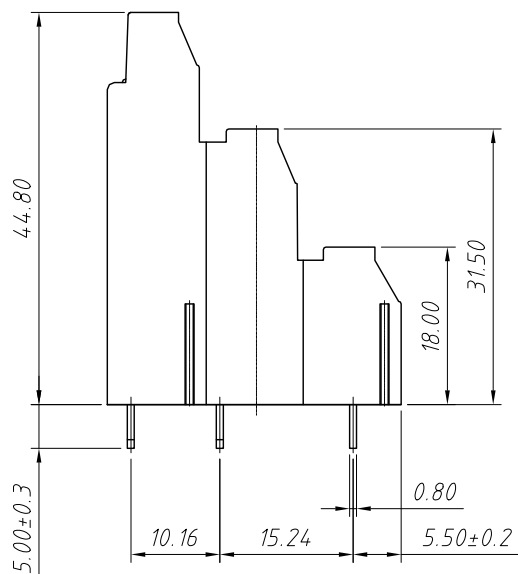

REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	WuHao	2024-11-13

Electrical	UL	IEC
Rated Voltage	300V	250V
Rated Current	20A	17.5A
Withstand Voltage	1600V/1 min	4.0 KV
Wire Range	26~12 AWG	0.5~2.5mm <sup>2</sup>

Material

Housing:PA66,UL94V-0

Pin Header:Copper alloy,Sn plated

Screw/Torque:M3.0/0.5N.m Max


Stripping Length:6~7 mm

Operating Temperature:-40°C ~ +105°C

Soldering Temperature:+260°C,For 5 Sec


Order Information

L-KLS2-133A-5.08-XXP-X X 09

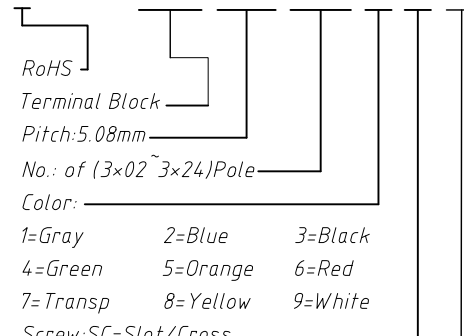

Screw:SC=Slot/Cross

S-Slot Screw C-Cross Screw

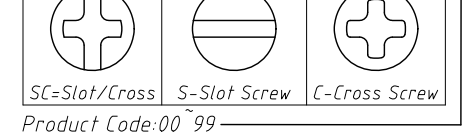

Product Code:00~99

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 5.08mm Terminal Blocks
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	WuHao 2024-11-13
x.xxx ±0.10	Check:	Daniel 2024-11-13
		KLS NingBo KLS ELECTRONIC CO.,L TD.