

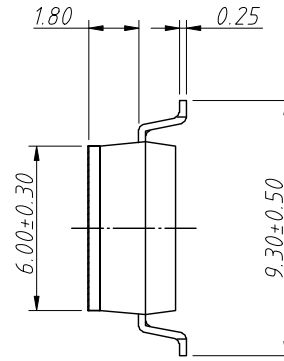
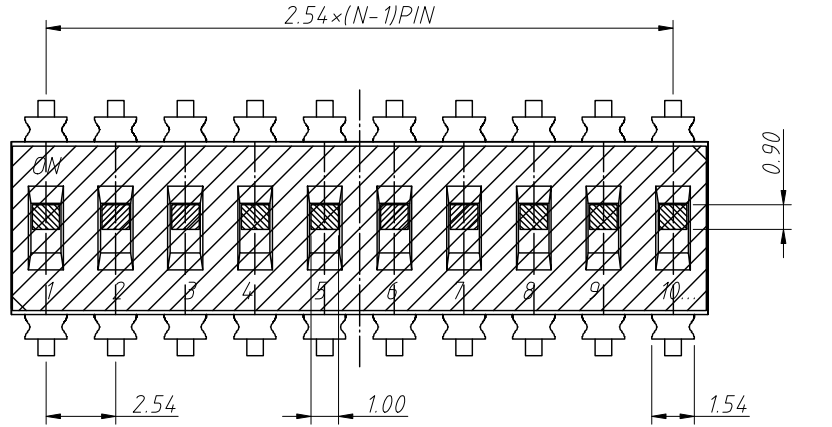


RoHS Compliance



REV	SYM	Revision Record	Appr.	Date
V0	KLS07086	New Version Release	Song	2024-04-24

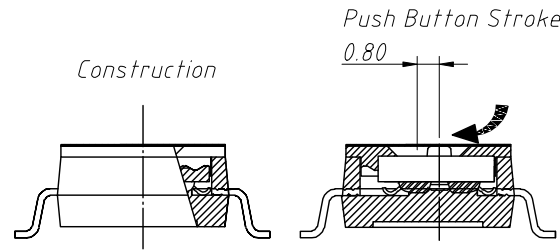

1.Material:
 Actuator:UL 94 V-0,White
 Cover:UL 94 V-0,Black
 Movable:Copper Alloy,3u" Gold Plating
 Terminal:Brass,
 1u"(Min.)Gold Flash On Soldertail
 3u"Gold Plating On Contact Area
 50u"Nickel Plating Under Plating Overall
 Base:UL 94 V-0,Black
 Mylar:UL 94 V-0, T=0.05mm

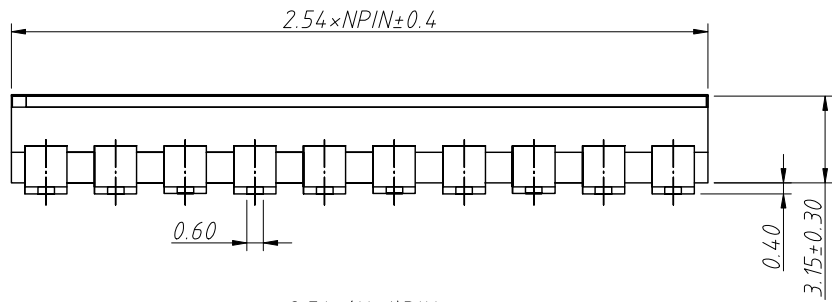

2.Electrical Characteristics:
 Operating force:1000gf Max
 Operating Temperature:-40°C ~ + 85°C
 Storage Temperature:-40°C ~ + 85°C
 Mechanical Life:3000cycles minimum
 Electrical Life:2000cycles 25mA 24 VDC

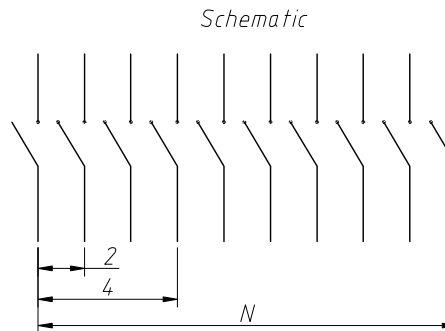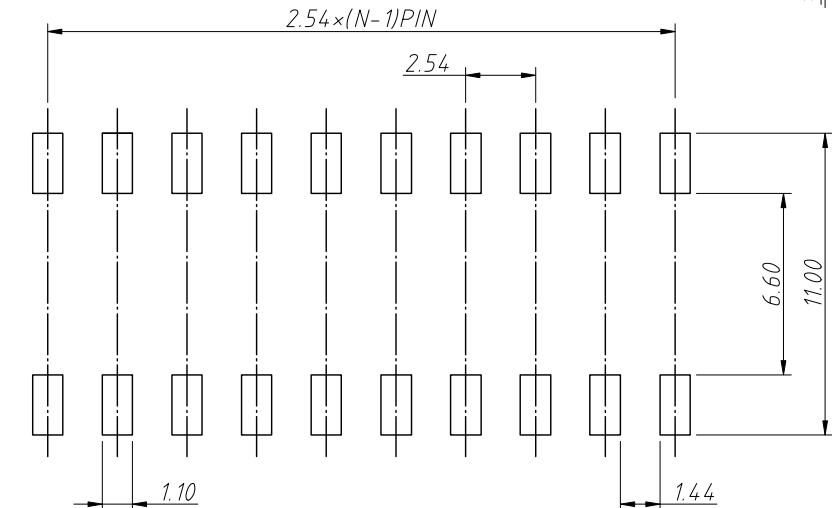

Order Information:

L-KLS7-KLR-XX-N- 1 1
 L: RoHS
 Recessed
 Type Dip Switch
 NO.Of 02 ~ 12 Pin
 Color Code:N-Black
 1:With Sealed
 Packaging:
 0-Tube Packing 1-Tape&Reel

ANGLE TOLERANCE	PROJECTION	Description:	Dip Switch	
$\pm 3^\circ$				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS7-KLR-XX-N-11
.x ± 0.25	SHEET SIZE	A4		
.xx ± 0.15	Draw:	Song	2024-04-24	NingBo KLS ELECTRONIC CO.,L.TD.
.xxx ± 0.10	Check:	Daniel	2024-04-24	