

Materials

Base & Cover:PPS (UL 94V-0)

Actuator:PA46 (UL 94V-0).

Contacts:Brass, Gold / Tin Plate

Terminals:Brass, Gold / Tin Plate

Specifications

Contact Rating:25 mA at 24VDC (switching)

100 mA at 50VDC (steady state)

Life:1,000 cycles

Contact Resistance:100mΩ Max.



Insulation Resistance:100MΩ at 100VDC Min

Dielectric Strength:300VAC Min

Storage Temperature:-40°C ~ 85°C

Operating Temperature:-25°C to 70°C.

Operation Force:9.8N Max.

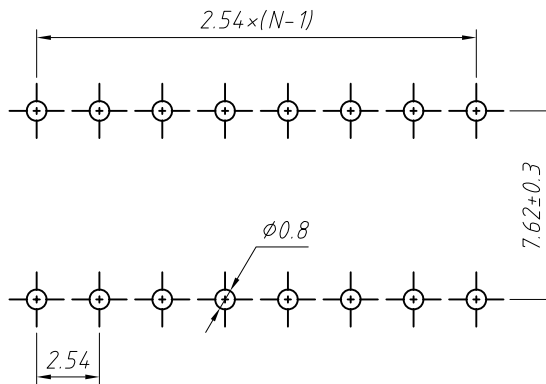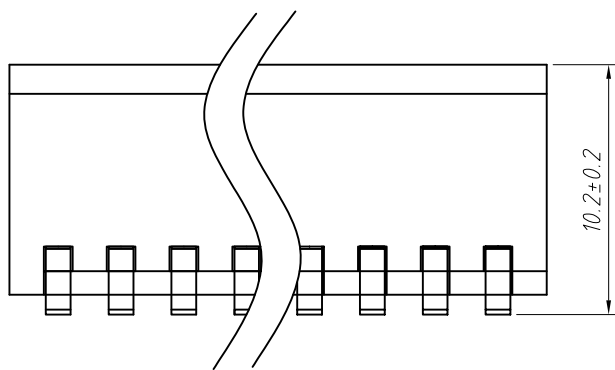

Order Information

L-KLS7-VP-XX-N-0-0

- Packaging: 0=Tube
- 1:With sealed 0:Non-sealed
- Color Code:N-Black
- Number of Pos.: 02~10 Pos
- New Piano Type Through hole
- RoHS

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.50	UNITS	mm	New Piano Type Through hole
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS7-VP
X. ±5°	Date	2018-03-01	NingBo KLS ELECTRONIC CO.,L TD.
.X ±3°	SHEET	1 OF 2	
.XX ±2°			