



Recommended PCB Layout (Top View)

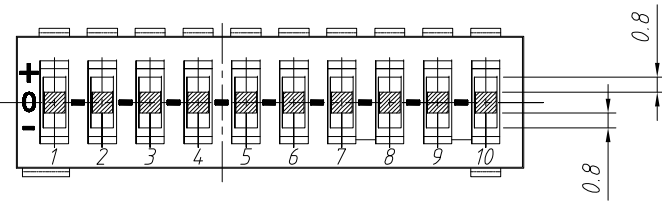


POS.	Dimensions	
	A	B
4P	11.64	7.62
5P	14.18	10.16
8P	21.80	17.78
9P	24.34	20.32
10P	26.88	22.86

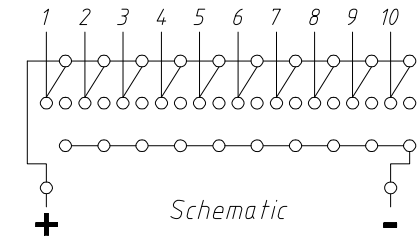

Schematic

Order Information

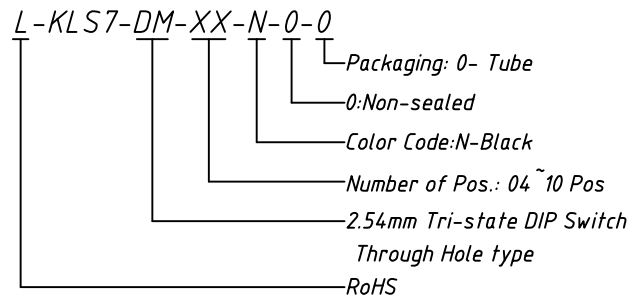

Materials

- Base & Cover:PPS (UL 94V-0)
- Actuator:PA46 (UL 94V-0).
- Contacts:Brass, Gold / Tin Plate
- Terminals:Brass, Gold / Tin Plate

Specifications

- Contact Rating:25 mA at 24VDC (switching)
- 100 mA at 50VDC (steady state)
- Life:2,000 cycles
- Contact Resistance:100mΩ Max.
- Insulation Resistance:100MΩ at 100VDC Min
- Dielectric Strength:300VAC Min

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.50	UNITS	mm	2.54mm Tri-state DIP Switch Through Hole type
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	KLS P/N: L-KLS7-DM
ANGLE TOLERANCE	Check by:		NingBo KLS ELECTRONIC CO.,L TD.
X. ±5°	Date	2018-03-01	
.X ±3°	SHEET	1 OF 2	
.XX ±2°			