

RoHS Compliance



REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	Song	2024-10-14

Electrical Characteristics	UL	IEC
Rated Voltage	300V	160V
Rated Current	10A	17.5A
Withstand Voltage	1600V/1Min	2.5KV
Wire Range	24 ~ 16AWG	0.2 ~ 0.5mm ²





Material and other:
 Housing: LCP, UL 94V-0
 Pin Header: Cobby Alloy, Sn Plated
 Stripping Length: 7 ~ 8mm
 Temp. Range: -40°C ~ +130°C
 Soldering temperature: 280°C/10s

Order Information

L-KLS2-212S-3.50-XXP-3

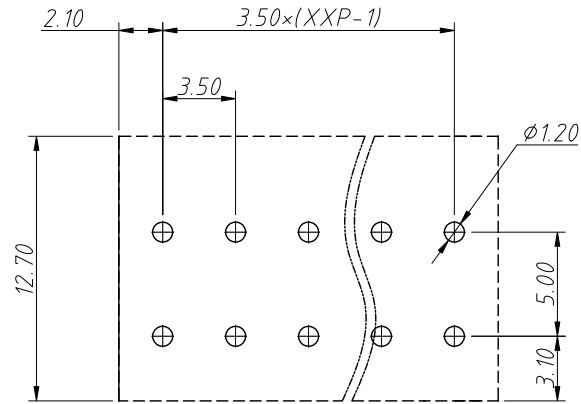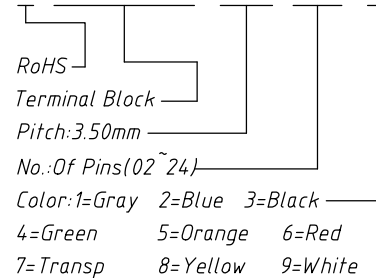

Recommended PCB Layout

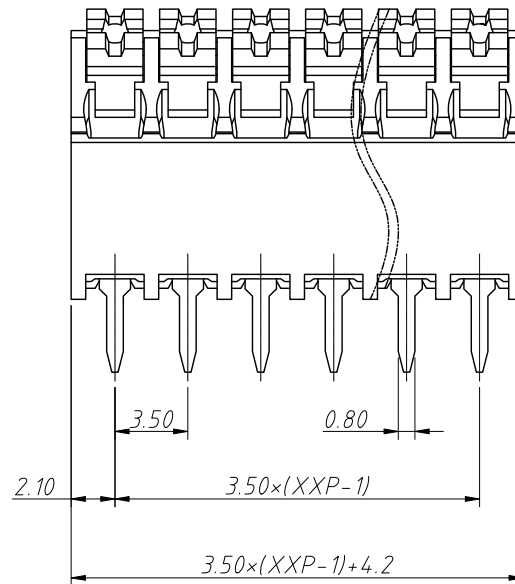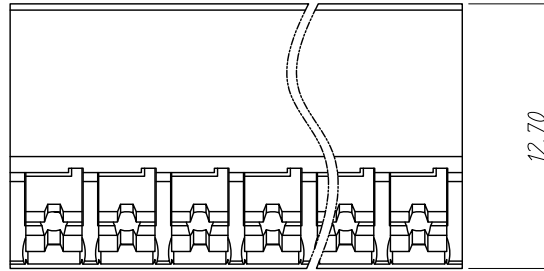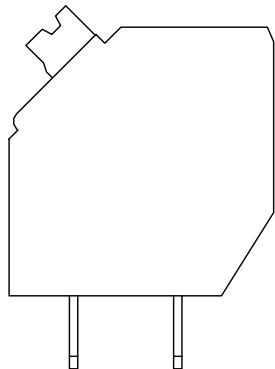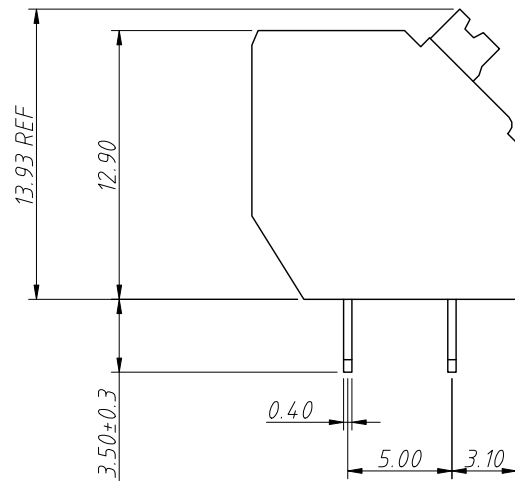

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 3.50 Pluggable Terminal Block, Socket
GENERAL TOLERANCE	UNITS	mm
0 ~ 30	±0.50	SHEET SIZE
30 ~ 60	±0.75	Draw:
60 ~ 90	±1.00	Check:
		KLS P/N:
		L-KLS2-212S-3.50-XXP-3
		2024-10-14
		2024-10-14



NingBo KLS ELECTRONIC CO.,LTD.