

1 RoHS Compliance



REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	Song	2024-09-02

Electrical Characteristics	UL	IEC
Rated Voltage	300V	500V
Rated Current	20A	32A
Withstand Voltage	1600V/1 min	6.0KV
Wire Range	28~12AWG	0.2~4.0mm ²


Material and other:
 Housing: PA66, UL 94V-0
 Pin Header: Cobby Alloy, Sn Plated
 Stripping Length: 9~10mm
 Operating Temperature: -40°C ~ +105°C

Order Information


L-KLS2-244-7.50-XXP-X

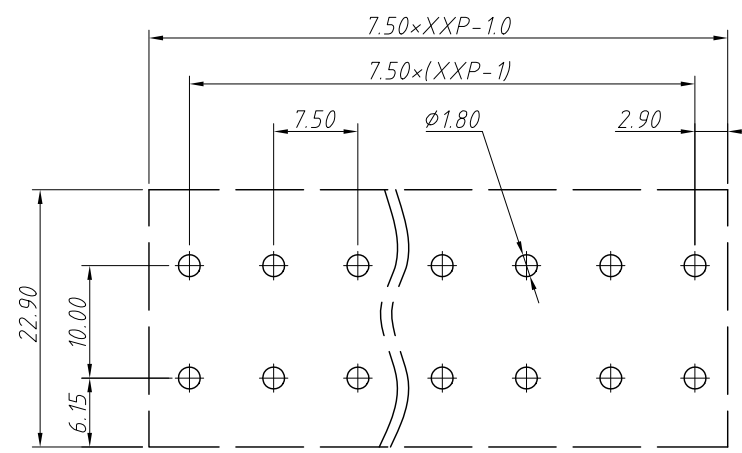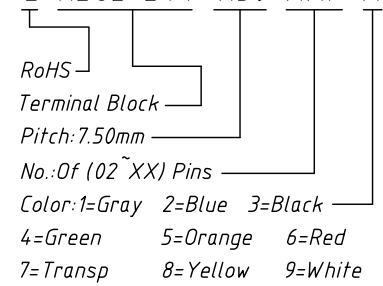

Recommended PCB Layout

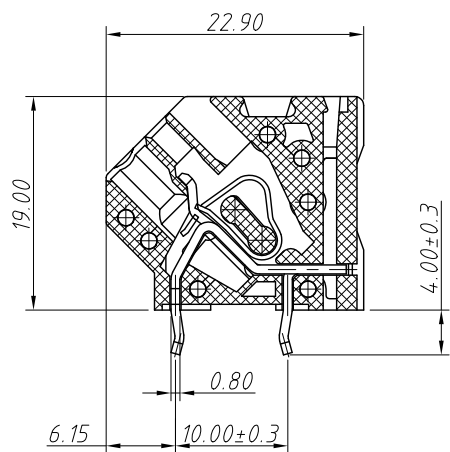

SECTION A-A

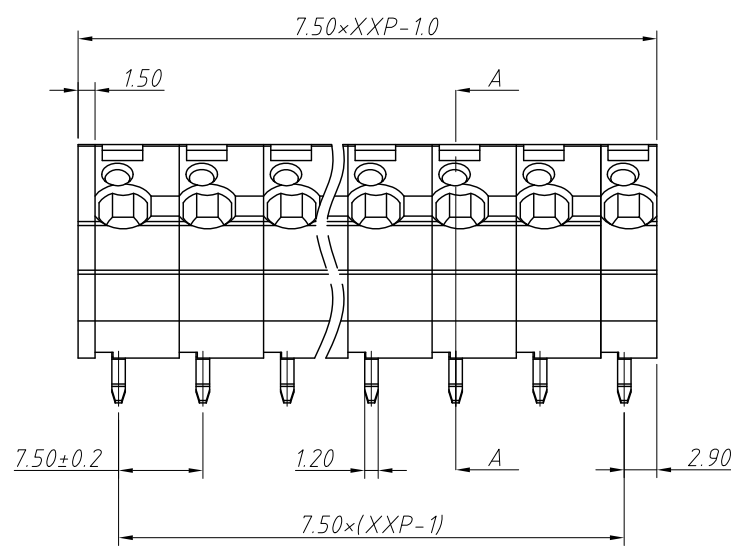

ANGLE TOLERANCE	PROJECTION	Description:	7.50mm Spring Terminal Blocks	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS2-244-7.50-XXP-X
0~30	±0.50	SHEET SIZE	A4	
30~60	±0.75	Draw:	Song	2024-09-02
60~90	±1.00	Check:	Daniel	2024-09-02

