



1 RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	Song	2024-09-02

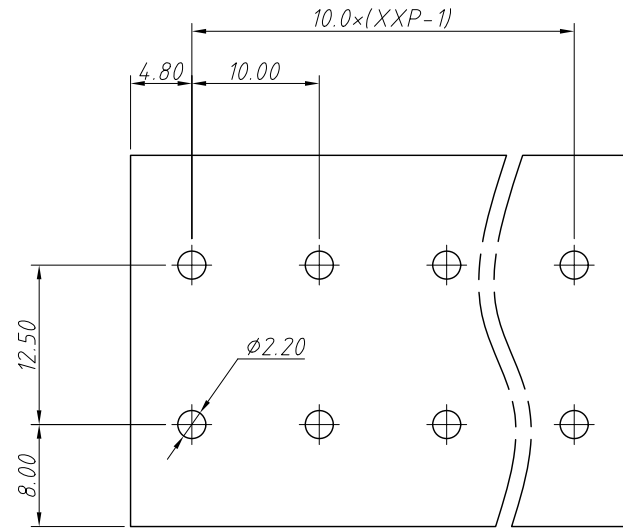


Recommended PCB Layout

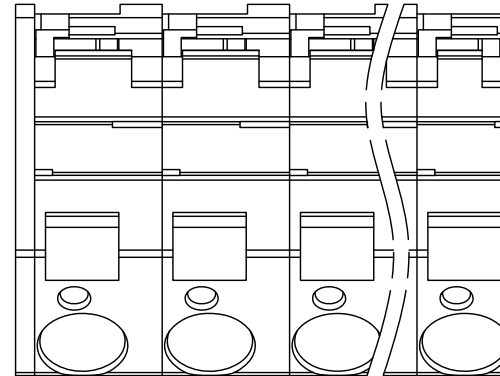


Electrical Characteristics	UL	IEC
Rated Voltage	300V	630V
Rated Current	30A	41A
Withstand Voltage	1600V/1min	8.0KV
Wire Range	24~10AWG	0.2~6.0mm ²

Material and other:
 Housing:PA, UL94V-0
 Pin Header:Coppo Alloy,Sn Plated
 Stripping Length:11-12mm
 Operating Temperature:-40°C~ +105°C

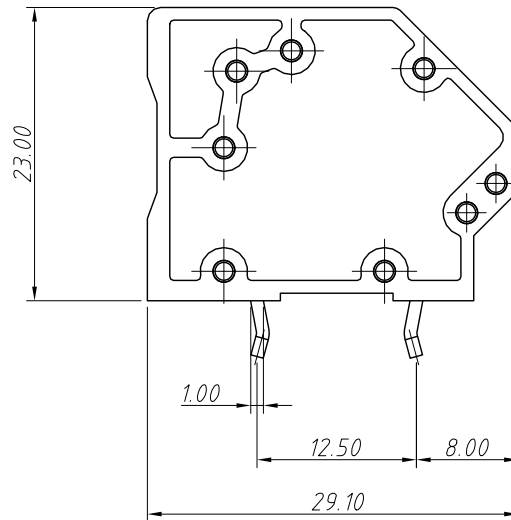

Without Cover

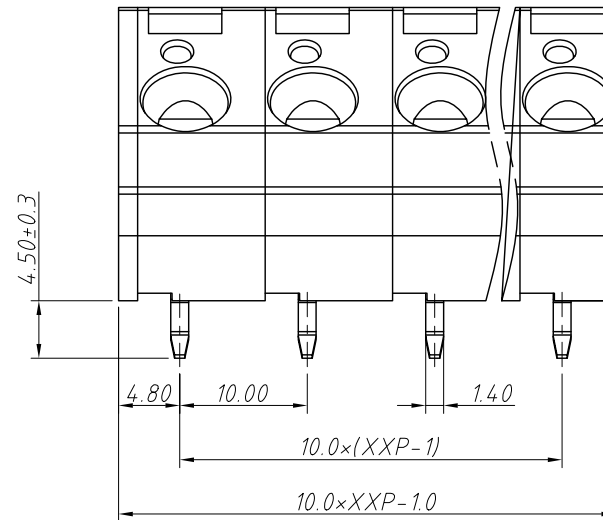

Order Information
 L-KLS2-261-10.0-XXP-X

RoHS
 Terminal Block
 Pitch:10.0mm
 No.:Of (02~12) Pins
 Color:1=Gray 2=Blue 3=Black
 4=Green 5=Orange 6=Red
 7=Transp 8=Yellow 9=White

ANGLE TOLERANCE	PROJECTION	Description:
±3°		10.0mm Spring Terminal Blocks
GENERAL TOLERANCE	UNITS	mm
0~30 ±0.50	SHEET SIZE	A4
30~60 ±0.75	Draw:	Song
60~90 ±1.00	Check:	Daniel
		KLS P/N: L-KLS2-261-10.0-XXP-X
		NingBo KLS ELECTRONIC CO.,L TD.