


1
RoHS Compliance

2		3		4		5		6		7		8	
REV	SYM	Revision Record				Appr.	Date						
V0	KLS02006	New Version Release				Jenny	2024-08-20						


Material and other:
 Housing:PA66, UL94V-0
 Cover:PA66, UL94V-0
 Pin:Copper alloy,Sn Plated
 Spring:Stainless steel
 Button:POM,UL94-HB
 Screw:Steel,M2.5/Zn Plated
 Screw Torque:0.4Nm max
 Stripping Length:7-8mm
 Operating temperature:-40°C ~ +105°C

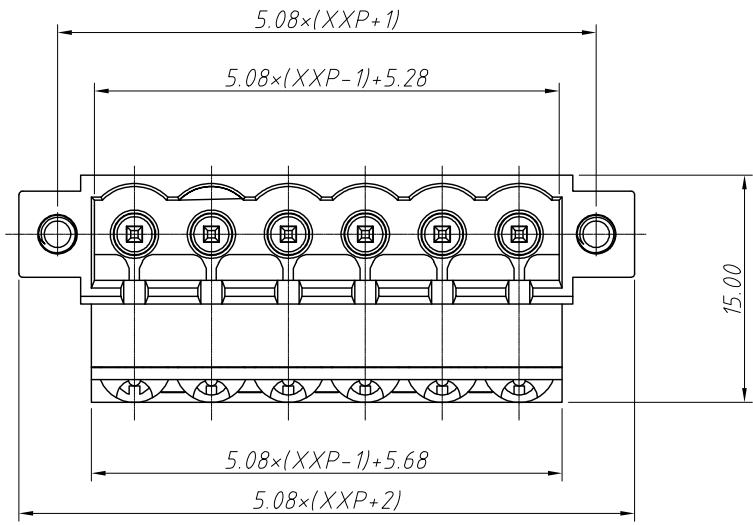

Electrical Characteristics	UL	IEC
Rated Voltage	300V	320V
Rated Current	10A	12A
Withstand Voltage	1600V / 1 min	4.0
Wire Range	12~28 AWG	0.2-2.5mm ²




Order Information

L-KLS2-EDKDRM-5.08-XXP-4 X

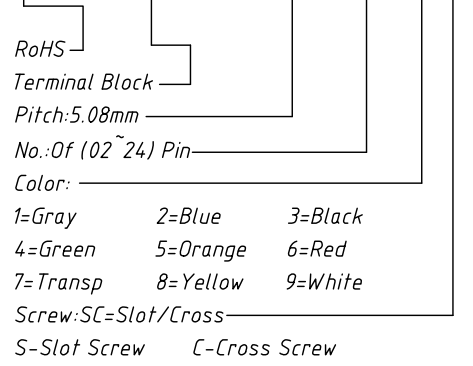

- 1=Gray 2=Blue 3=Black
- 4=Green 5=Orange 6=Red
- 7=Transp 8=Yellow 9=White

Screw:SC=Slot/Cross
 S-Slot Screw C-Cross Screw

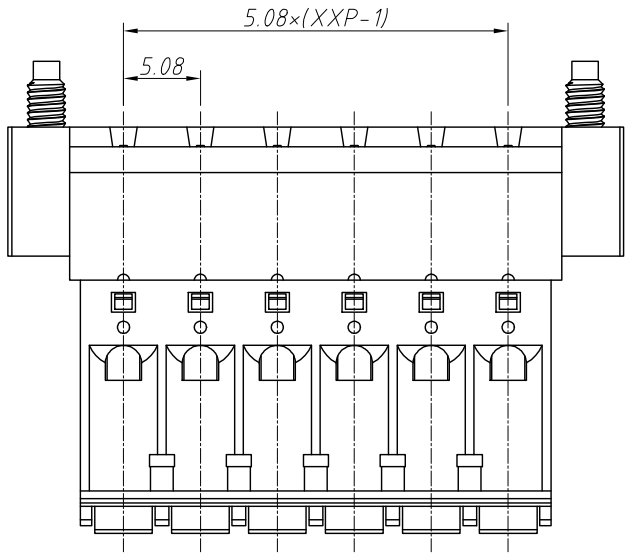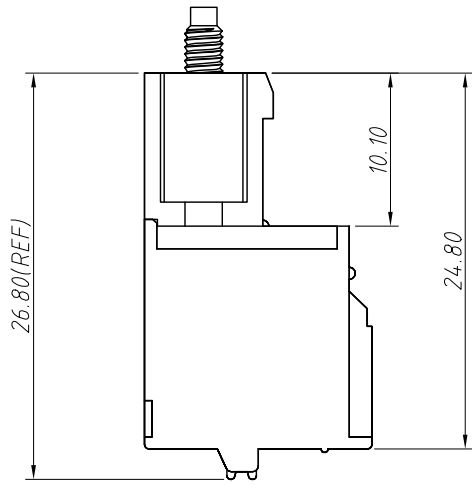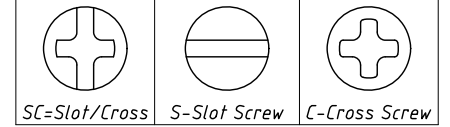

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Pitch 5.08mm Pluggable Terminal Block,Plug	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS2-EDKDRM-5.08-XXP-4X
0~30	±0.50	SHEET SIZE	A4		
30~60	±0.75	Draw:	Jenny	2024-08-20	
60~90	±1.00	Check:	Daniel	2024-08-20	

KLS NingBo KLS ELECTRONIC CO.,L TD.