
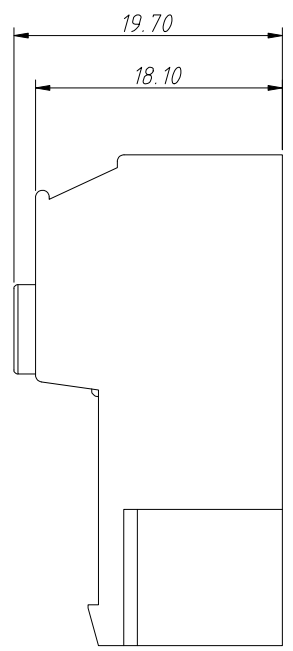


1 RoHS Compliance




REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	Song	2024-10-26

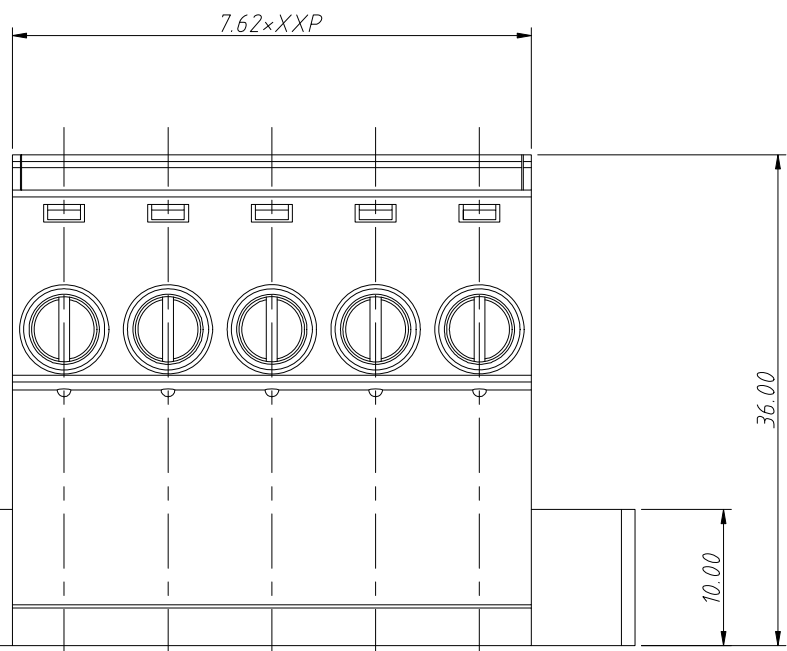

Electrical Characteristics	UL	IEC
Rated Voltage	600V	1000V
Rated Current	41A	41A
Withstand Voltage	2200V/1 min	8.0KV
Wire Range	24~8 AWG	0.2~6.0mm ²

Material and other:
 Housing+Cover:PA66, UL94 V-0
 Pin Header:Copper Alloy,Sn Plated
 Cage:Copper Alloy,M3/Ni Plated
 Screw/Torque:Steel,M3,Zn Plated/0.8N.m
 Stripping Length:10mm
 Operating Temperature:-40°C~+105°C

Order Information
 L-KLS2-DGKM-7.62-XXP-XX

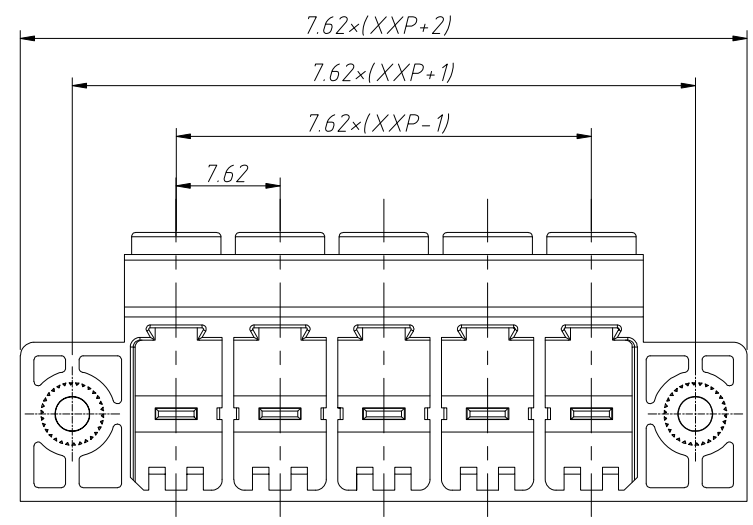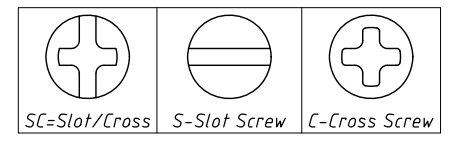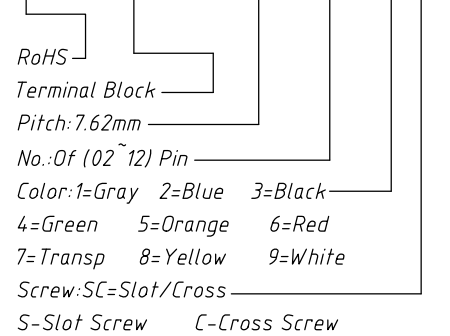

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 7.62mm Terminal Block
GENERAL TOLERANCE	UNITS	mm
0~30 ±0.50	SHEET SIZE	A4
30~60 ±0.75	Draw:	Song
60~90 ±1.00	Check:	Daniel
		KLS P/N: L-KLS2-DGKM-7.62-XXP-XX

