
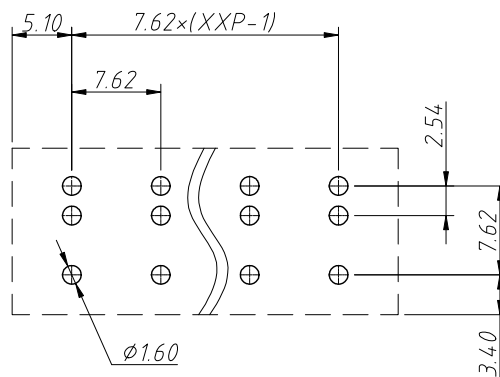


1 RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	WuHao	2024-09-27

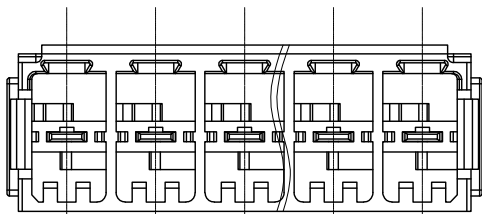

Recommended PCB Layout

Electrical Characteristics	UL	IEC
Rated Voltage	300V	630V
Rated Current	41A	41A
Withstand Voltage	1600V/1 min	6.0KV
Wire Range	24 ~ 8 AWG	---



Material and other:

Housing: PA66, UL 94V-0

Pin: Copper Alloy, Sn Plated


Operating Temperature: -40°C ~ +105°C

Soldering Temperature: 260°C/5 Sec

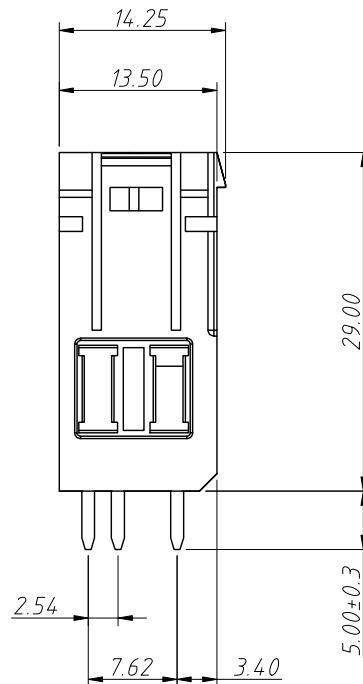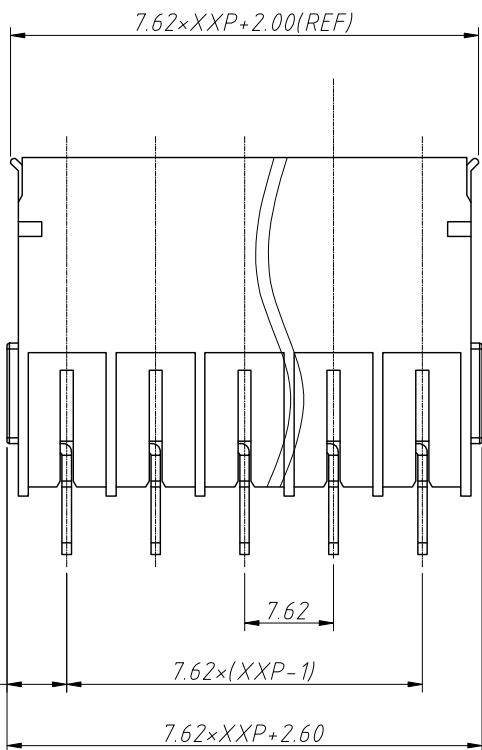

Order Information

L-KLS2-KKFV-7.62-XXP-X

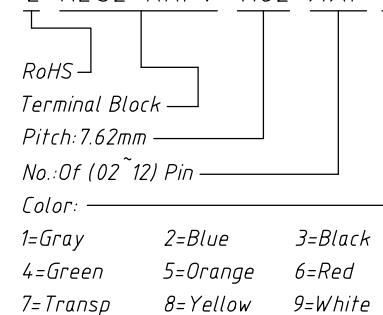

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 7.62mm Pluggable Terminal Block, Socket
GENERAL TOLERANCE	UNITS	mm
0°~30° ±0.50	SHEET SIZE	A4
30°~60° ±0.75	Draw:	WuHao 2024-09-27
60°~90° ±1.00	Check:	Daniel 2024-09-27
		L-KLS2-KKFV-7.62-XXP-X
		NingBo KLS ELECTRONIC CO.,L TD.