
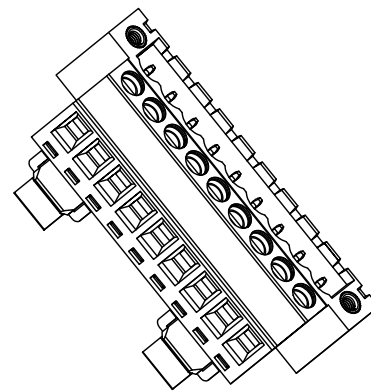


1 RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	Song	2024-08-20

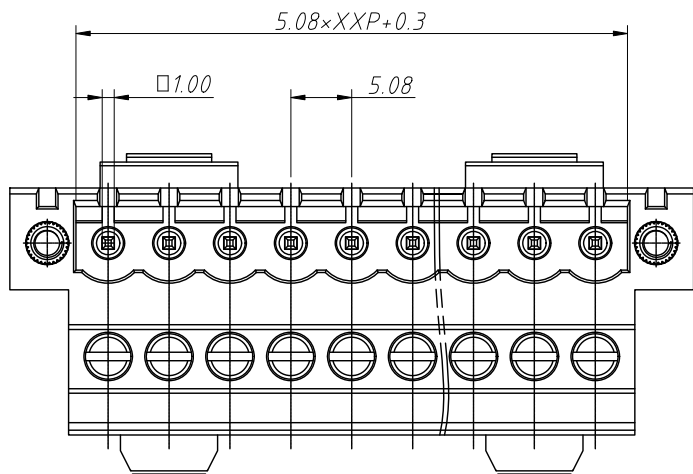





Electrical Characteristics	UL	IEC
Rated Voltage	300V	320V
Rated Current	15A	12A
Withstand Voltage	1600V / 1min	4.0KV
Wire Range	28 ~ 12 AWG	0.2 ~ 2.5mm ²

Material and other:
 Housing+Cover: PA66, UL 94 V-0
 Pin: Copper Alloy, Sn Plated
 Cage: Copper Alloy, M3/Ni Plated
 Screw/Torque: Steel, M3/Zn Plated/0.5N.m Max
 Nut: Copper Alloy, M2.5
 Stripping Length: 7 ~ 8mm
 Operating Temperature: -40°C ~ +105°C

Order Information

L-KLS2-UGVKM-5.08-XXP-XX

RoHS
 Terminal Block
 Pitch: 5.08mm
 No.: Of (02 ~ 24) Pin
 Color: 1=Gray 2=Blue 3=Black
 4=Green 5=Orange 6=Red
 7=Transp 8=Yellow 9=White
 Screw: SC=Slot/Cross
 S-Slot Screw C-Cross Screw

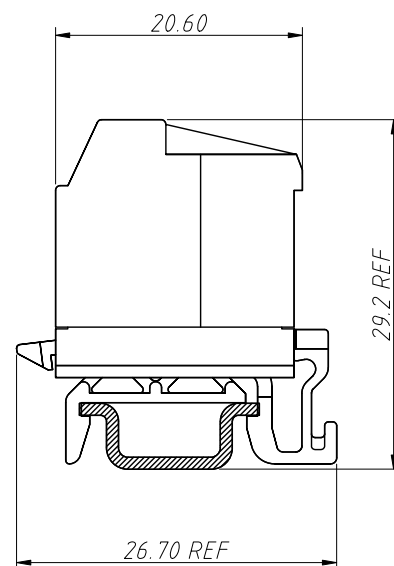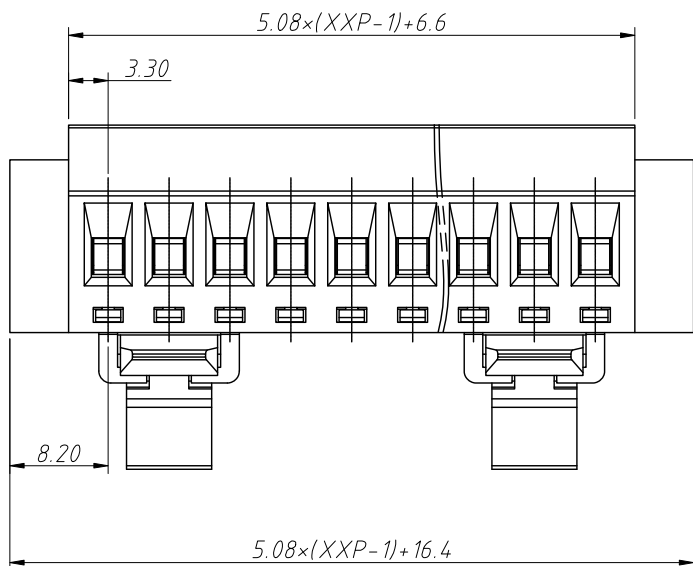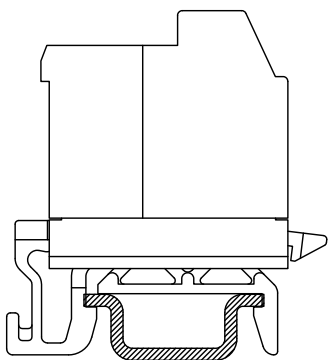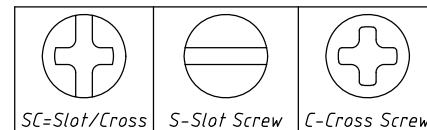

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 5.08mm Din-Rail Terminal Block
GENERAL TOLERANCE	UNITS	mm
0 ~ 30	±0.50	SHEET SIZE
30 ~ 60	±0.75	A4
60 ~ 90	±1.00	Draw:
	Check:	Song
		Daniel
		2024-08-20
		2024-08-20

KLS NingBo KLS ELECTRONIC CO.,L TD.