




1
RoHS Compliance

| | | |
|-----|----------|---------------------|
| 6 | 7 | 8 |
| REV | SYM | Revision Record |
| V0 | KLS02006 | New Version Release |
| | | Appr. Jenny |
| | | Date 2024-08-29 |

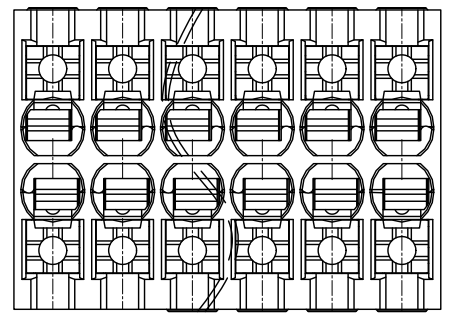

| | | |
|----------------------------|---------------|------------------------|
| Electrical Characteristics | UL | IEC |
| Rated Voltage | 300V | 160V |
| Rated Current | 9.5A | 13.4A |
| Withstand Voltage | 1600V / 1 min | 2.5KV |
| Wire Range | 16 ~ 26 AWG | 0.2-1.5mm ² |

Material and other:
 Housing:PA, UL 94V-0
 Contactor:Copper alloy,Sn Plated
 Stripping Length:10-11mm
 Operating temperature:-40°C ~ +105°C

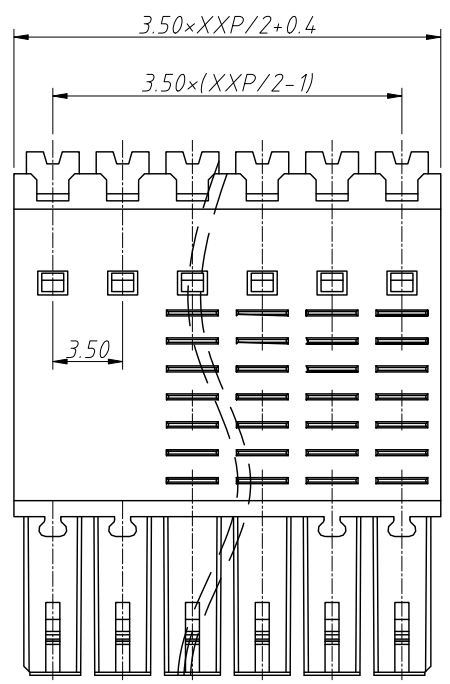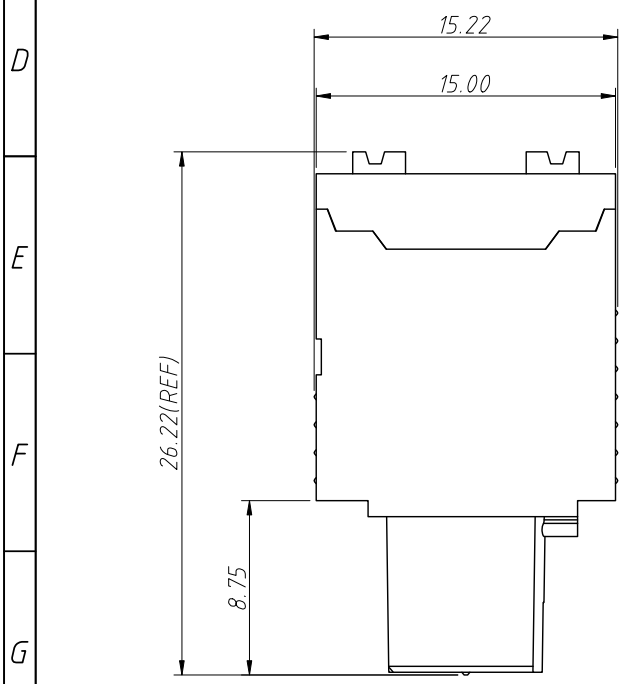

Order Information
 L-KLS2-FMKB-3.50-XXP-4

RoHS
 Terminal Block
 Pitch:3.50mm
 No.:Of (04 ~ 48) Pin
 Color:

1=Gray 2=Blue 3=Black
 4=Green 5=Orange 6=Red
 7=Transp 8=Yellow 9=White

| | | |
|-------------------|------------|--|
| ANGLE TOLERANCE | PROJECTION | Description: |
| ±3° | | Pitch 3.50mm Pluggable Terminal Block,Plug |
| GENERAL TOLERANCE | UNITS | mm |
| 0 ~ 30 | ±0.50 | SHEET SIZE |
| 30 ~ 60 | ±0.75 | Draw: |
| 60 ~ 90 | ±1.00 | Check: |
| | | KLS P/N: |
| | | L-KLS2-FMKB-3.50-XXP-4 |
| | | 2024-09-05 |
| | | 2024-09-05 |

