RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	Jenny	2024-08-29

Electrical Characteristics	UL	IEC
Rated Voltage	300V	160V
Rated Current	9.5A	13.4A
Withstand Voltage	1600V / 1 min	2.5KV
Wire Range	16~26 AWG	0.2-1.5mm^2

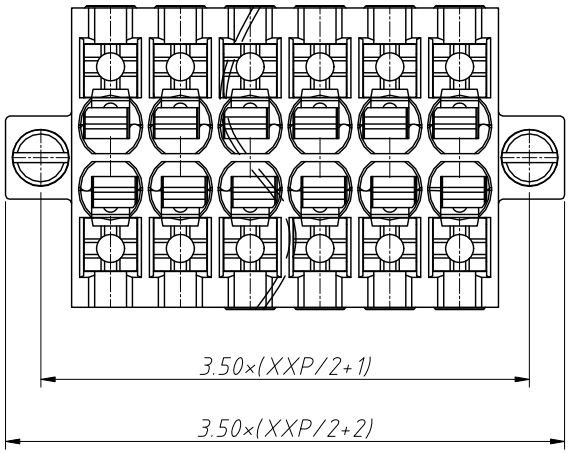

Material and other:
Housing:PA, UL94V-0
Contactor:Copper alloy,Sn Plated
Stripping Length:10-11mm
Operating temperature:-40°C ~ +105°C

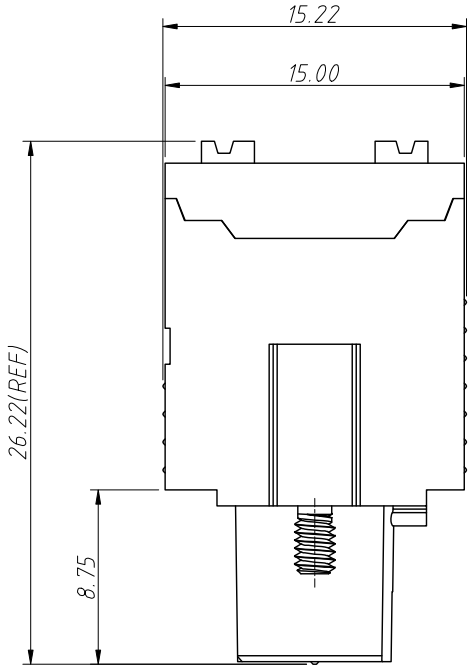

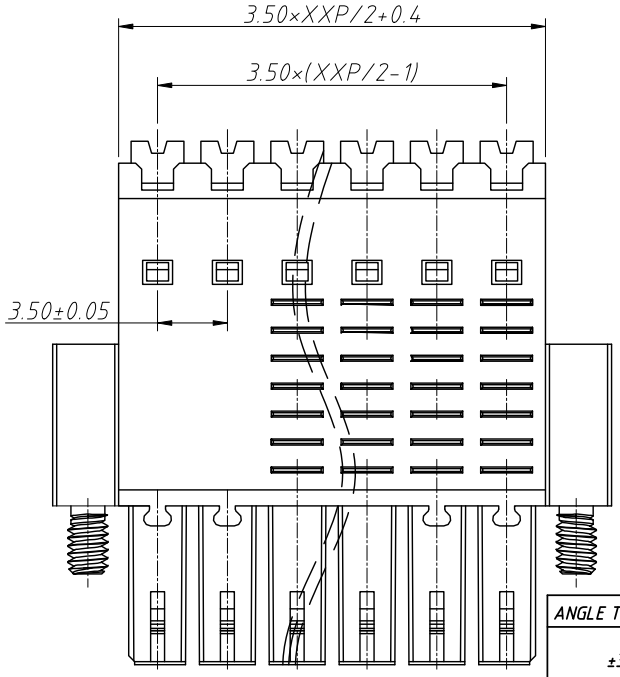

Order Information

L-KLS2-FMKBM-3.50-XXP-4

- RoHS
- Terminal Block
- Pitch:3.50mm
- No.:Of (04~48) Pin
- Color:

1=Gray	2=Blue	3=Black
4=Green	5=Orange	6=Red
7=Transp	8=Yellow	9=White

ANGLE TOLERANCE	PROJECTION		Description:	
±3°			Pitch 3.50mm Pluggable Terminal Block,Plug	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS2-FMKBM-3.50-XXP-4
0~30 ±0.50	SHEET SIZE	A4		
30~60 ±0.75	Draw:	Jenny	2024-09-05	NingBo KLS ELECTRONIC CO.,LTD.
60~90 ±1.00	Check:	Daniel	2024-09-05	