


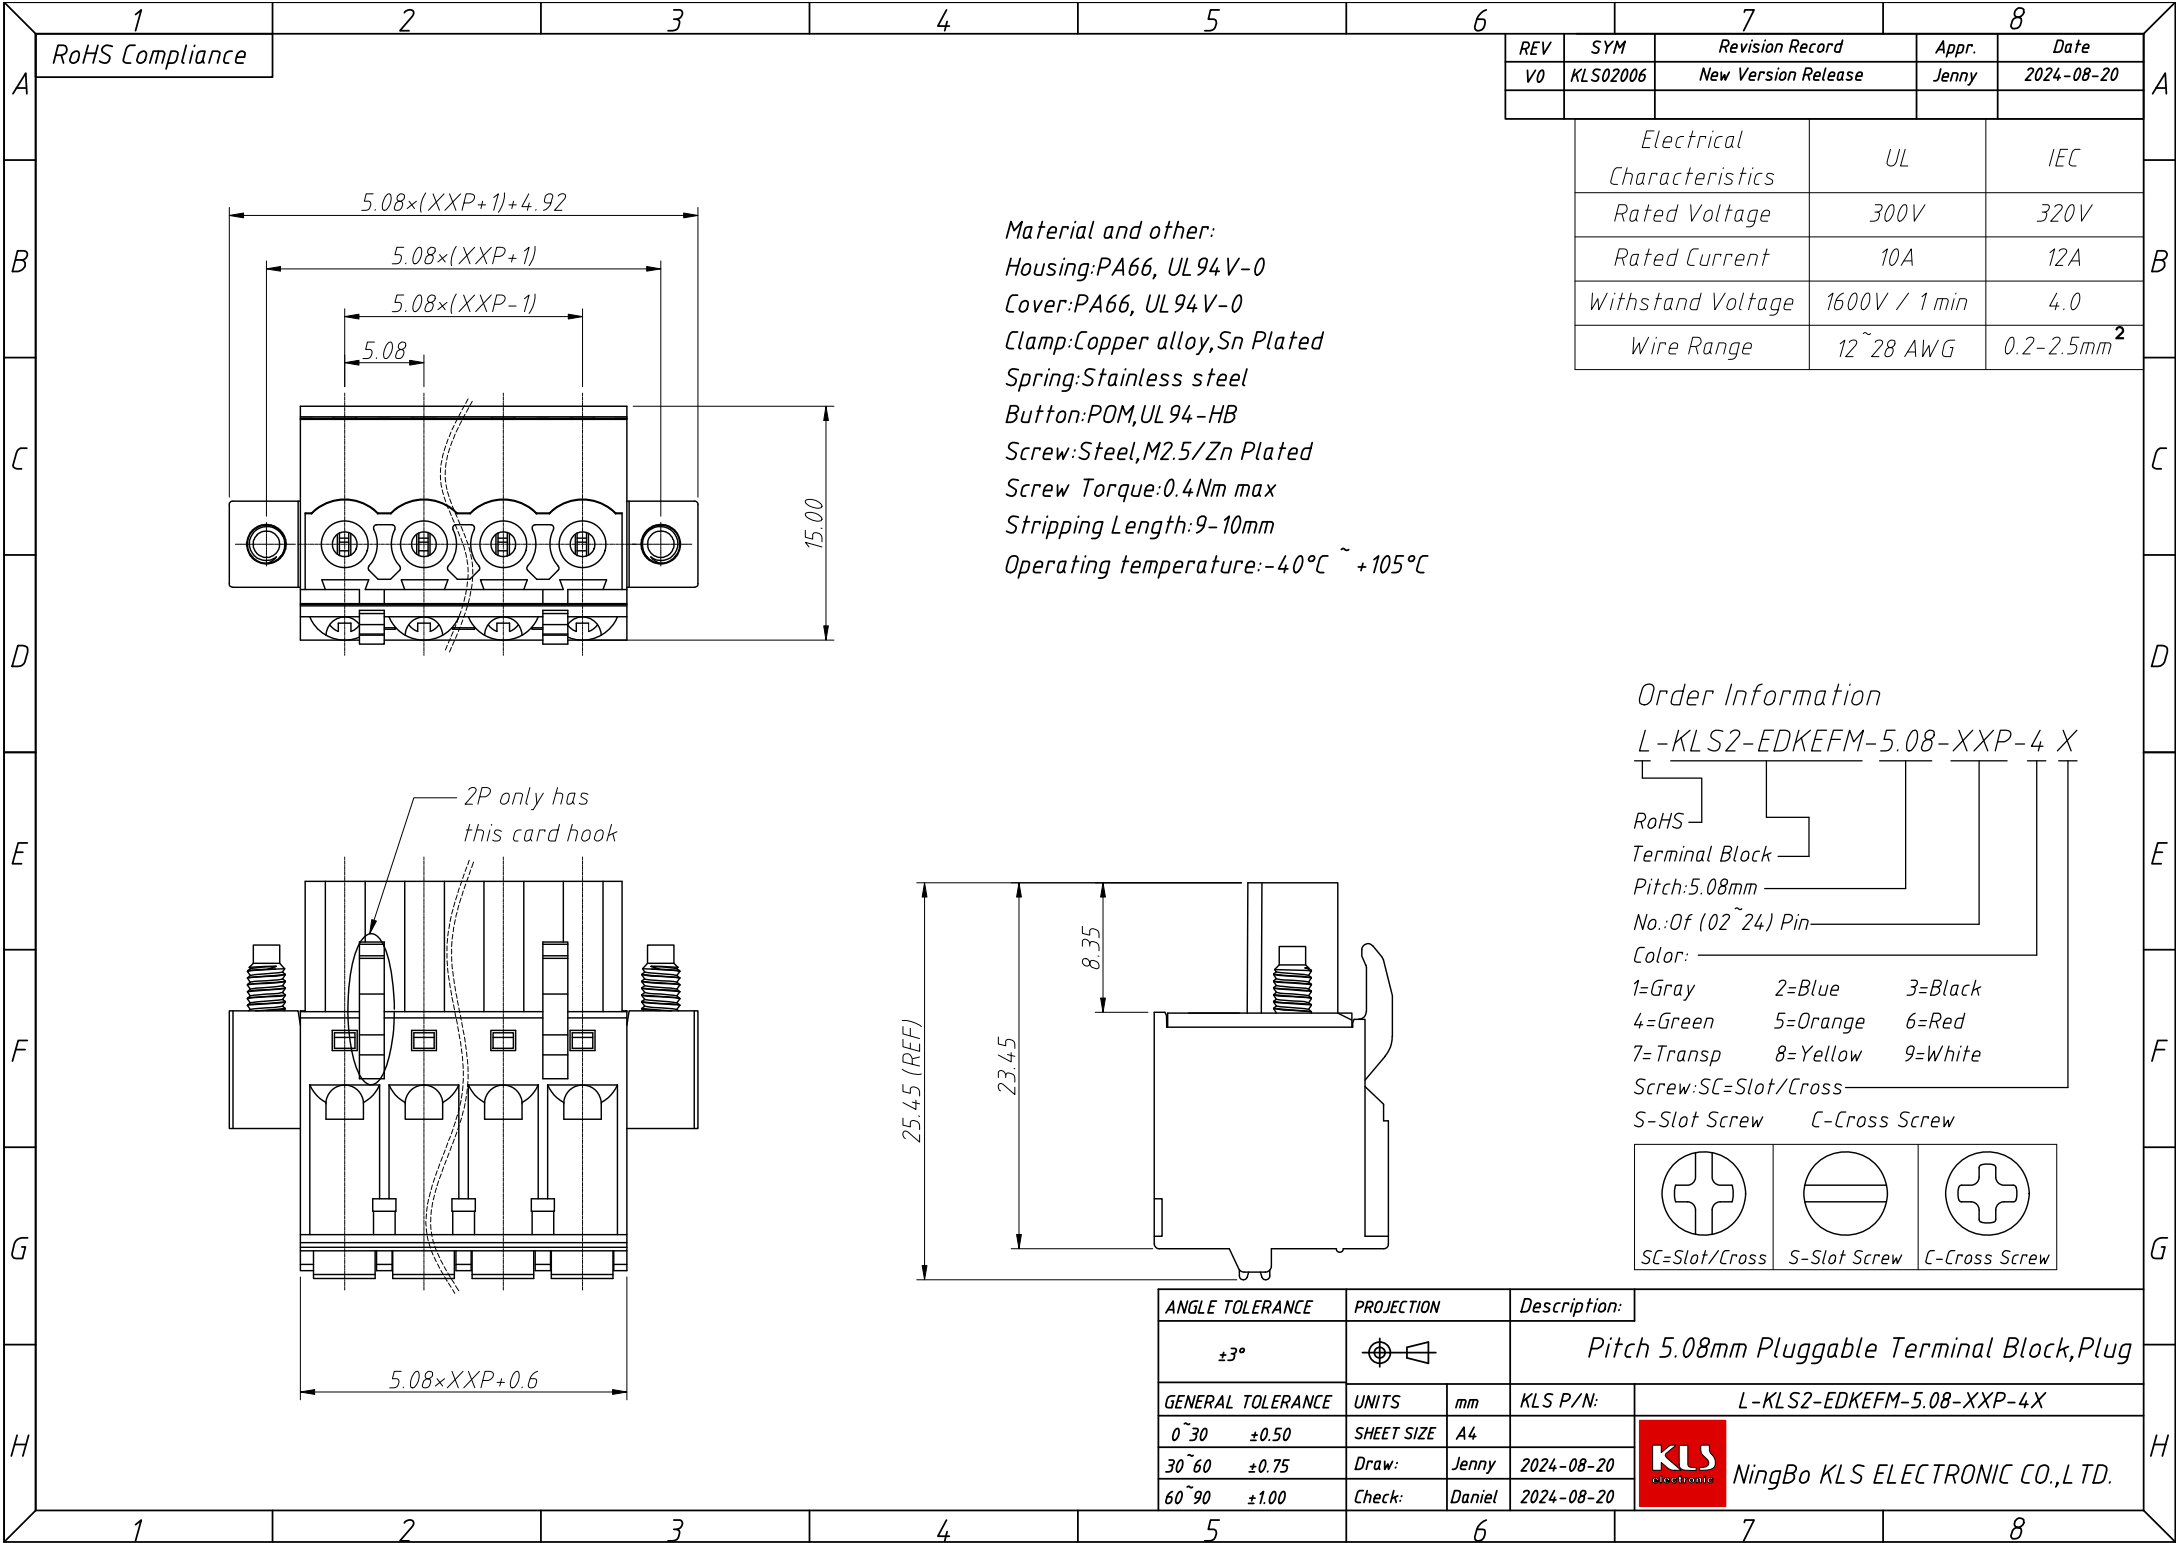

1
RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	Jenny	2024-08-20


Electrical Characteristics	UL	IEC
Rated Voltage	300V	320V
Rated Current	10A	12A
Withstand Voltage	1600V / 1 min	4.0
Wire Range	12~28 AWG	0.2-2.5mm ²

Material and other:
Housing:PA66, UL94V-0
Cover:PA66, UL94V-0
Clamp:Copper alloy,Sn Plated
Spring:Stainless steel
Button:POM,UL94-HB
Screw:Steel,M2.5/Zn Plated
Screw Torque:0.4Nm max
Stripping Length:9-10mm
Operating temperature:-40℃ ~ +105℃

Order Information

L-KLS2-EDKEFM-5.08-XXP-4 X

RoHS
Terminal Block
Pitch:5.08mm
No.:Of (02~24) Pin
Color:
1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White
Screw:SC=Slot/Cross
S-Slot Screw C-Cross Screw

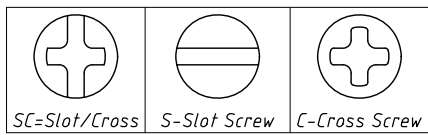

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 5.08mm Pluggable Terminal Block,Plug
GENERAL TOLERANCE	UNITS	mm
0~30 ±0.50	SHEET SIZE	A4
30~60 ±0.75	Draw:	Jenny
60~90 ±1.00	Check:	Daniel
KLS P/N:		L-KLS2-EDKEFM-5.08-XXP-4X
KLS electronic		NingBo KLS ELECTRONIC CO.,LTD.