
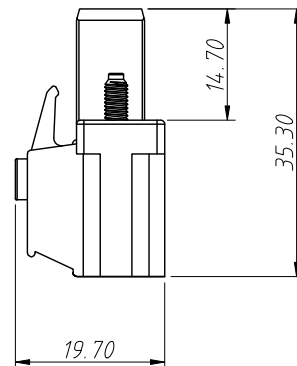

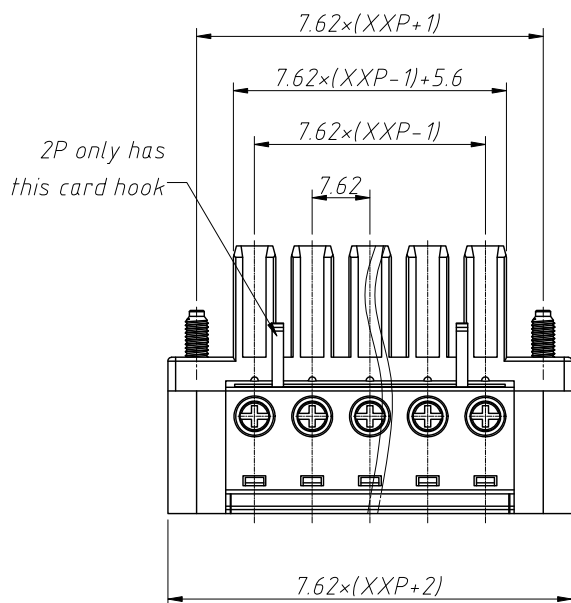


1
RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02006	New Version Release	Jenny	2024-09-07

Electrical Characteristics	UL	IEC
Rated Voltage	300V	1000V
Rated Current	41A	41A
Withstand Voltage	1600V / 1min	8.0KV
Wire Range	8 ~ 24 AWG	0.2 ~ 6.0mm ²



Material and other:
 Housing:PA66, UL 94 V-0
 Cover:PA66, UL 94 V-0
 Clamp:Copper alloy,Sn Plated
 Cage:Copper alloy,Ni Plated
 Screw:Steel,M3/Zn Plated
 Screw Torque:0.5Nm max
 Stripping Length:10mm
 Operating temperature:-40°C ~ +105°C

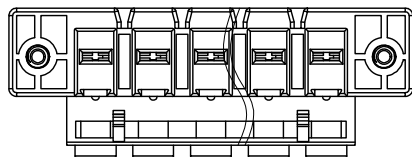

Order Information

L-KLS2-KFFHM-7.62-XXP-4 X

RoHS Terminal Block
 Pitch:7.62mm
 No.:Of (02 ~ 12) Pin
 Color:
 1=Gray 2=Blue 3=Black
 4=Green 5=Orange 6=Red
 7=Transp 8=Yellow 9=White
 Screw:SC=Slot/Cross
 S-Slot Screw C-Cross Screw

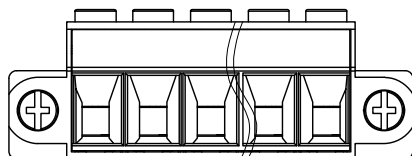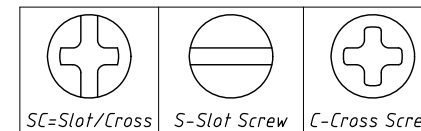

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Pitch 7.62mm Pluggable Terminal Block,Plug
GENERAL TOLERANCE	UNITS	mm
0 ~ 30 ±0.50	SHEET SIZE	A4
30 ~ 60 ±0.75	Draw:	Jenny 2024-09-07
60 ~ 90 ±1.00	Check:	Daniel 2024-09-07
		KLS NingBo KLS ELECTRONIC CO.,L TD.