

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS05089	New Version Release	Song	2024-12-02

Notes:

Material: Brass, Nickel Plated




Electric:

Dielectric Voltage: 500V AC One Sec Level.

Contact Resistance: 30 mΩ Max.

Insulator Resistance: 100 MΩ Min.

Operating Temperature: -40°C ~ +85°C.

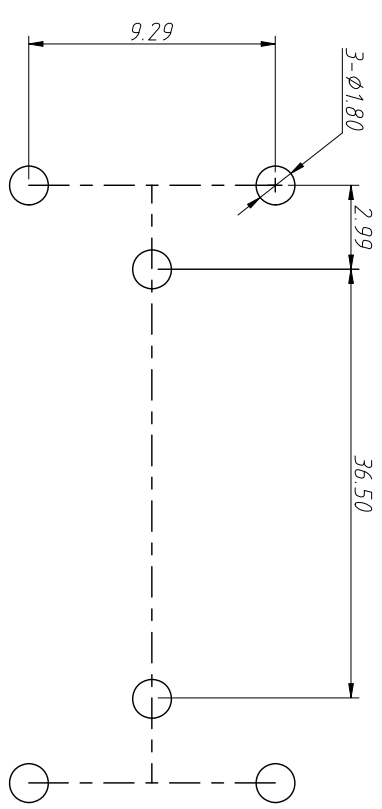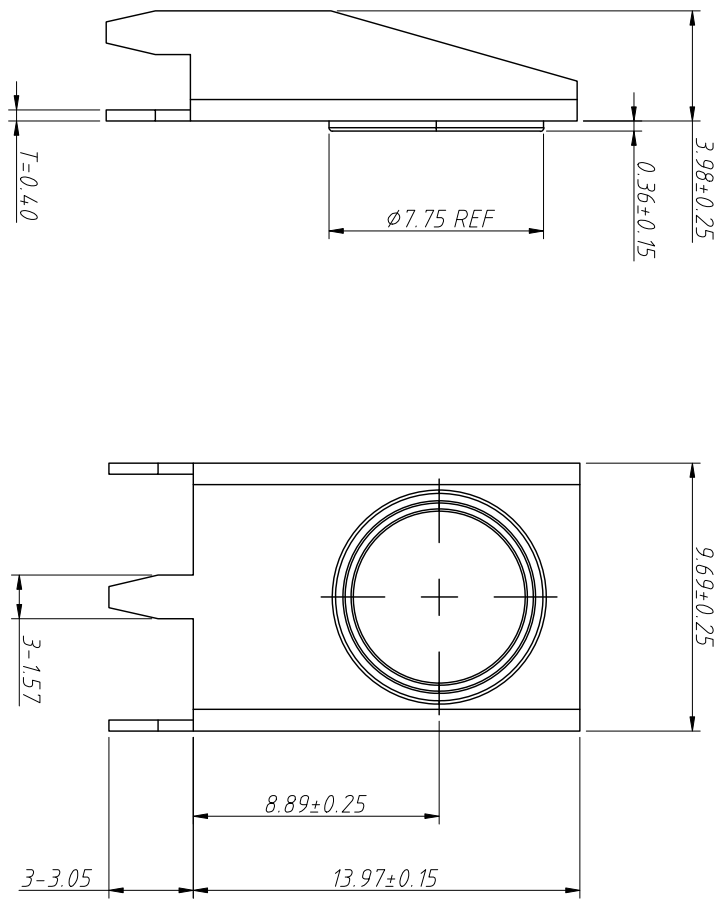

Recommended PCB Layout
Tolerance: ±0.05mm

ANGLE TOLERANCE	PROJECTION	Description:
±3°		Battery Holder

GENERAL TOLERANCE	UNITS	SHEET SIZE	KLS P./N.	L-KLS5-BC9V-07E	
.X ±0.30	mm	A4			
.XX ±0.20	Draw:	Song			
.XXX ±0.10	Check:	Daniel			



Ningbo KLS ELECTRONIC CO.,LTD.