



1
RoHS Compliance

2	3	4	5	6	7	8
REV	SYM	Revision Record		Appr.	Date	
V0	KLS01078	New Version Release		Song	2025-02-08	

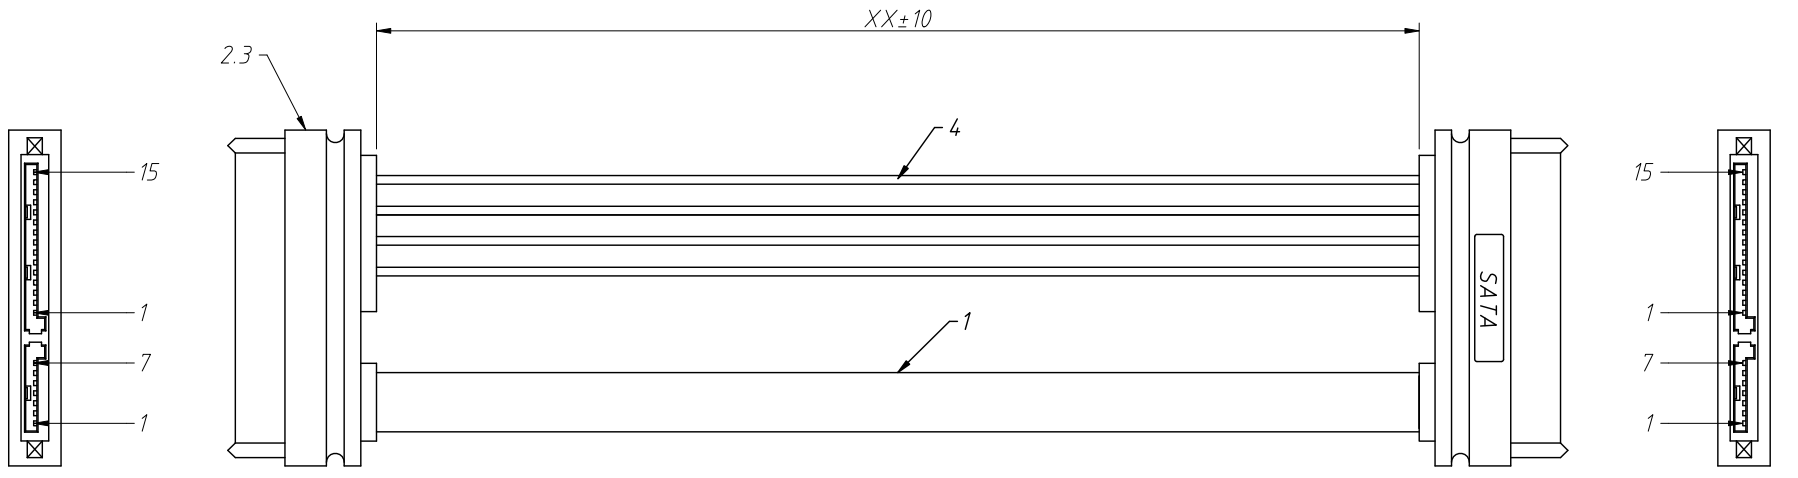


Pin Assignment



Order Information:

L-KLS17-SCP-12-50MM-R




Cable Color: R=Red L=Blue

Material:

- Cable: SATA CABLE UL2725 26AWG(0.30/2C+A+0.30/2D)×2 +RED PVC JACKET, OD=2.2×7.8±0.15mm WIN WIN
- Connector: SATA 7+15P Female, Without Lock, Black rubber core
- PVC: 40P PVC, Black
- Wire: UL 1007 22AWG ×4

Electrical:

- 100% Open, Short Test
- Conductance Resisance: 5Ω Max
- Insulation Resistance: 5MΩ Min
- HI-POT Test: 300V DC/10ms

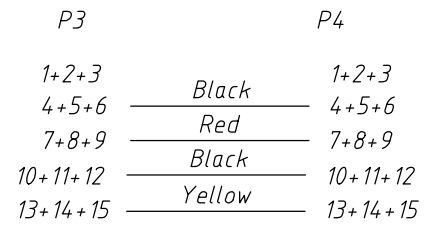

ANGLE TOLERANCE	PROJECTION	Description:			
±3°		SATA Harness			
GENERAL TOLERANCE	UNITS	mm	KLS P/N:		
.x ±0.30	SHEET SIZE	A4	L-KLS17-SCP-12-XXMM-X		
.xx ±0.20	Draw:	Song	2025-02-08	NingBo KLS ELECTRONIC CO.,L TD.	
.xxx ±0.10	Check:	Daniel	2025-02-08		