


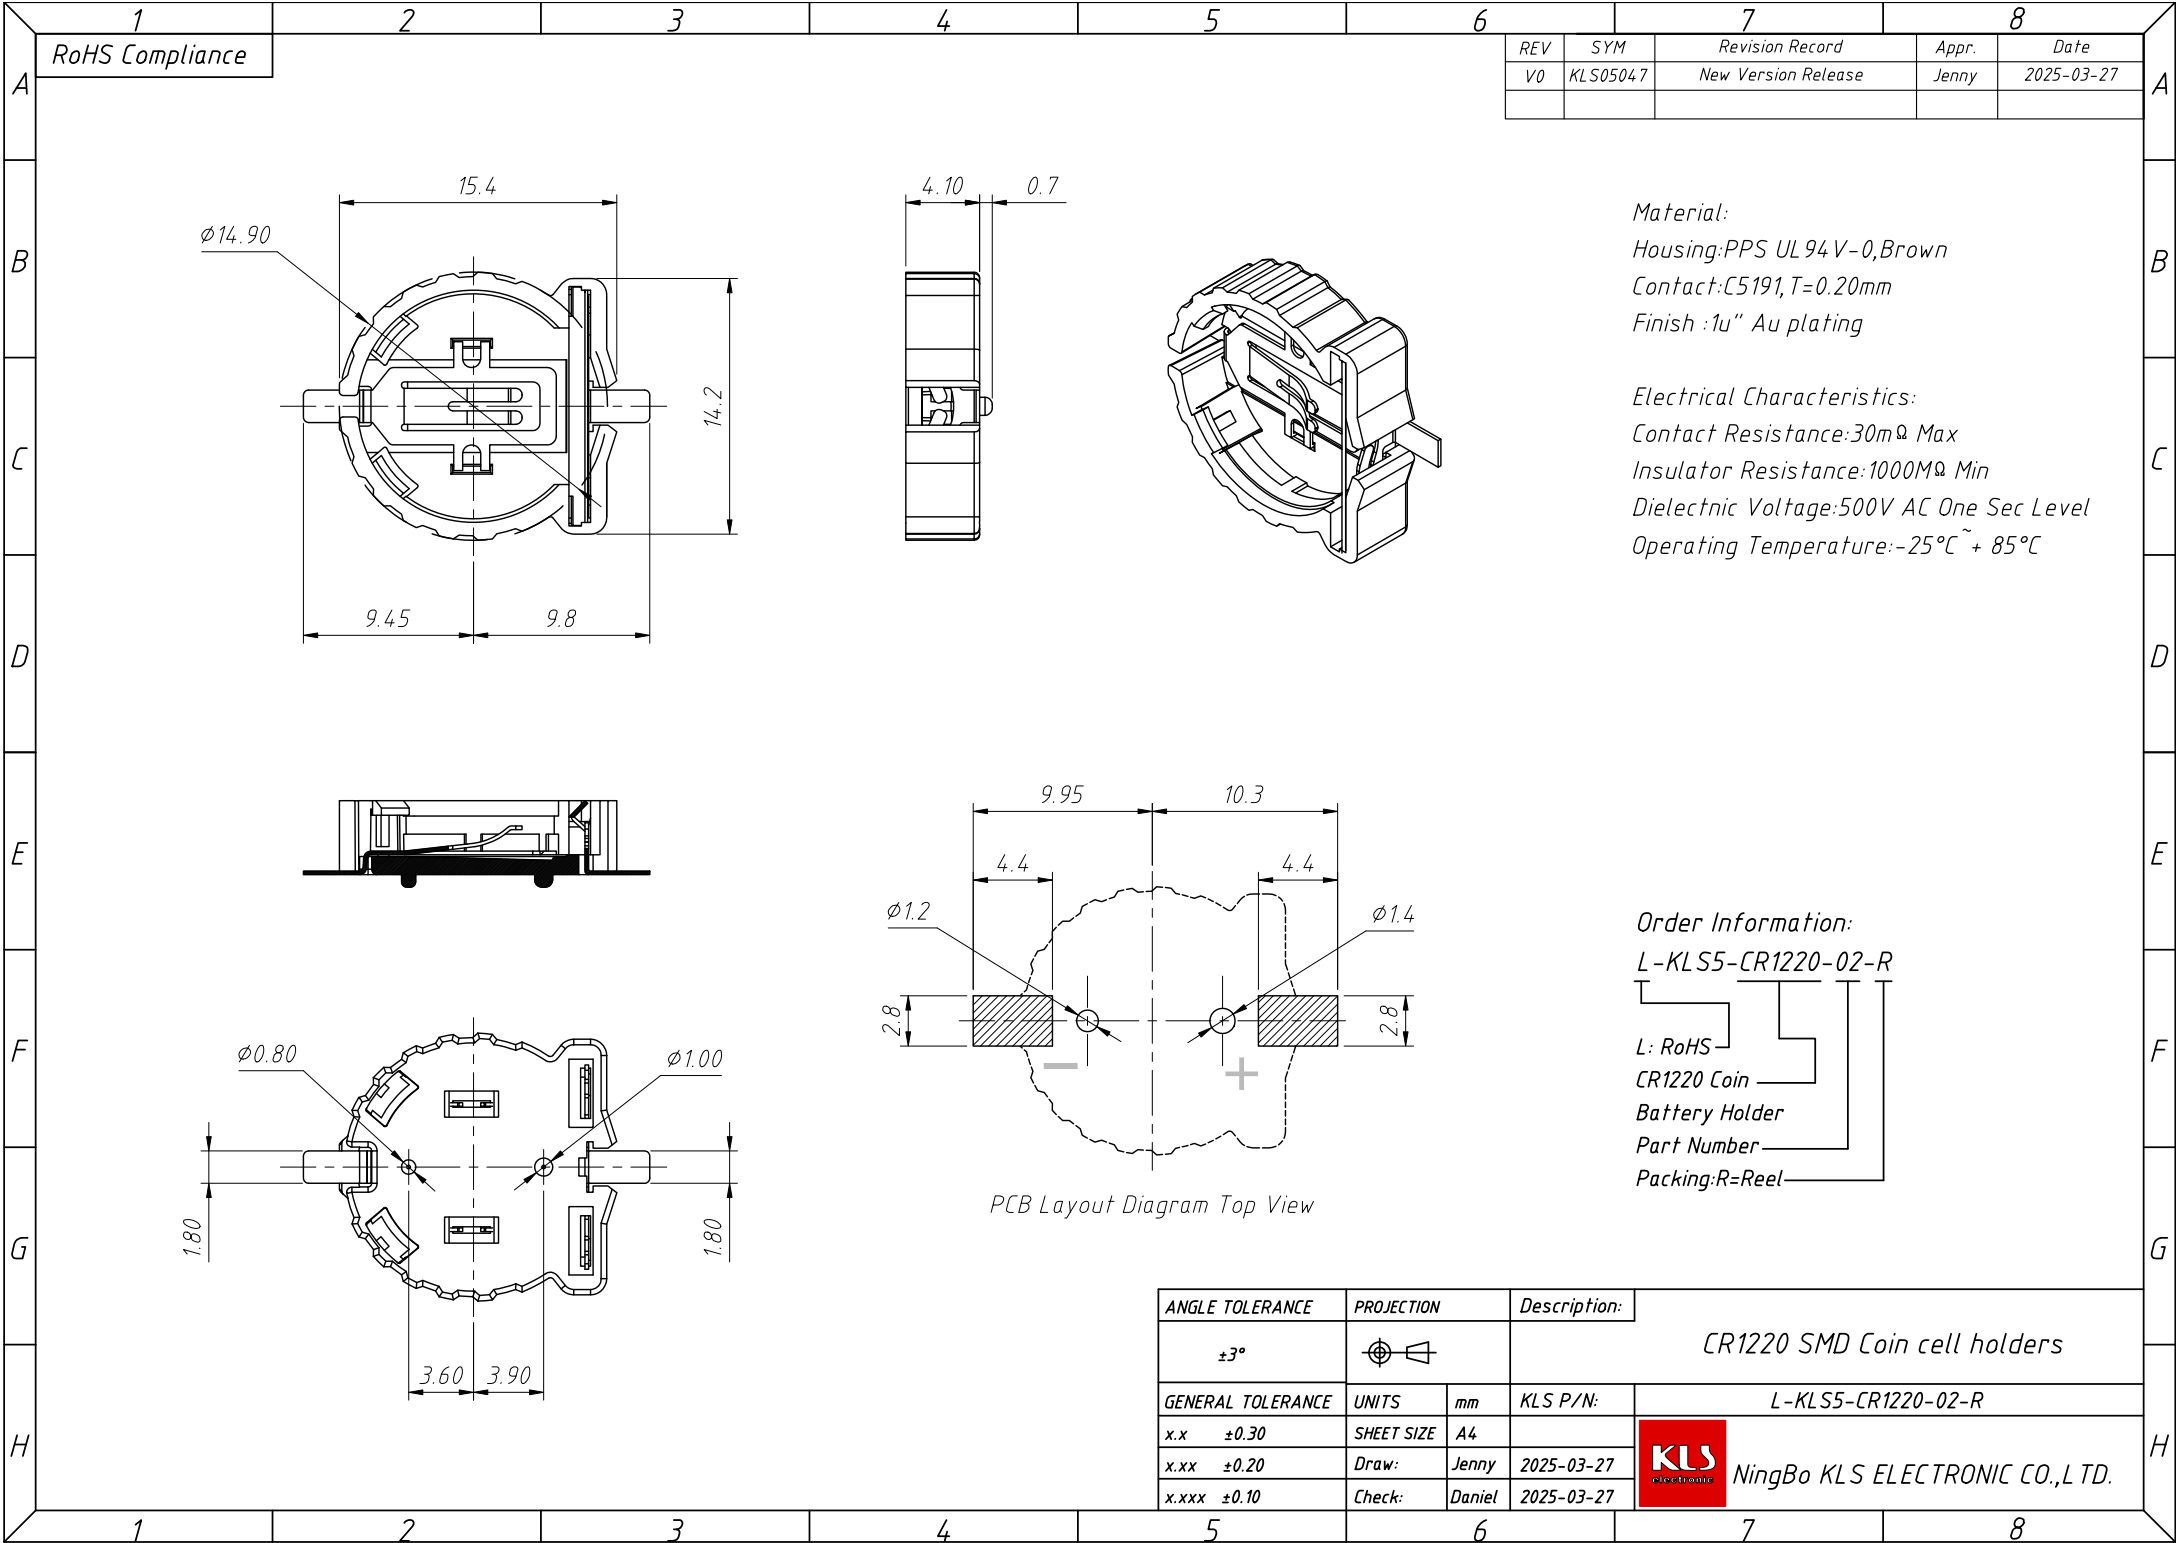

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS05047	New Version Release	Jenny	2025-03-27

Material:
Housing:PPS UL94V-0,Brown
Contact:C5191,T=0.20mm
Finish :1u" Au plating

Electrical Characteristics:
Contact Resistance:30mΩ Max
Insulator Resistance:1000MΩ Min
Dielectnic Voltage:500V AC One Sec Level
Operating Temperature:-25℃~+85℃

Order Information:
L-KLS5-CR1220-02-R

L: RoHS
CR1220 Coin
Battery Holder
Part Number
Packing:R=Reel

ANGLE TOLERANCE		PROJECTION	Description:	
±3°			CR1220 SMD Coin cell holders	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:
x.x	±0.30	SHEET SIZE	A4	L-KLS5-CR1220-02-R
x.xx	±0.20	Draw:	Jenny	2025-03-27
x.xxx	±0.10	Check:	Daniel	2025-03-27