


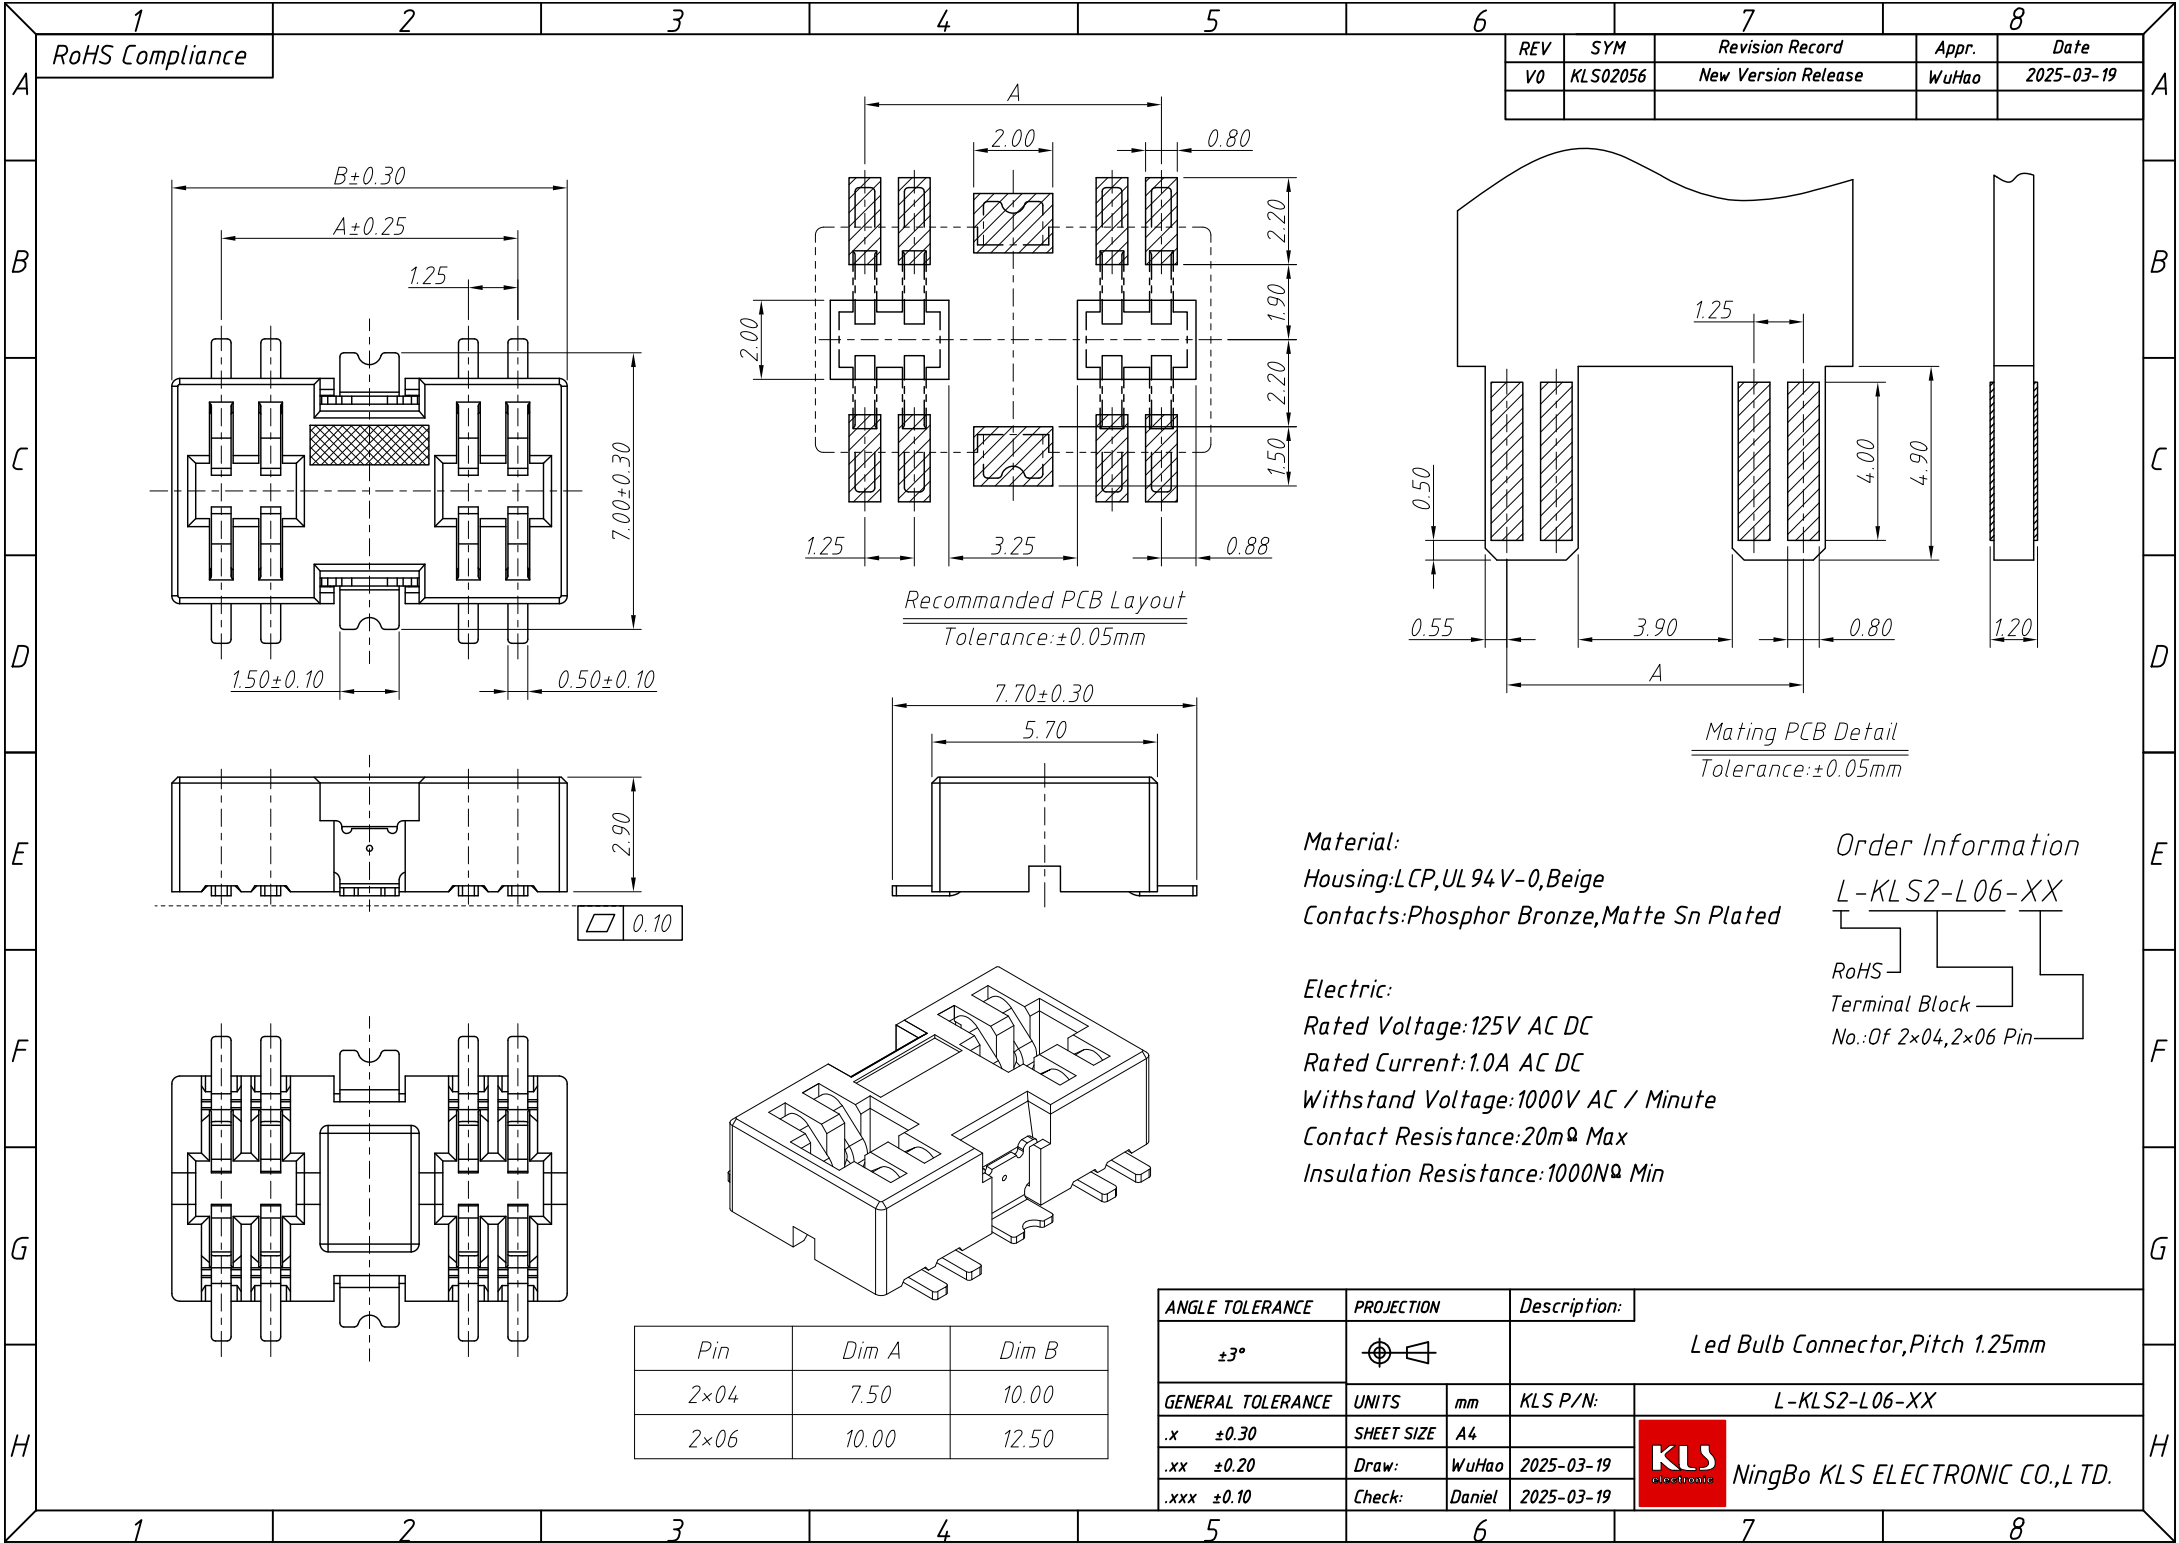

1
RoHS Compliance

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS02056	New Version Release		WuHao	2025-03-19

Material:
Housing:LCP,UL 94 V-0,Beige
Contacts:Phosphor Bronze,Matte Sn Plated

Electric:
Rated Voltage:125V AC DC
Rated Current:1.0A AC DC
Withstand Voltage:1000V AC / Minute
Contact Resistance:20m Ω Max
Insulation Resistance:1000N Ω Min

Order Information
L-KLS2-L06-XX

RoHS
Terminal Block
No.:Of 2x04,2x06 Pin

Pin	Dim A	Dim B
2x04	7.50	10.00
2x06	10.00	12.50

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^\circ$				Led Bulb Connector,Pitch 1.25mm	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS2-L06-XX
.x	± 0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L TD.
.xx	± 0.20	Draw:	WuHao	2025-03-19	
.xxx	± 0.10	Check:	Daniel	2025-03-19	