


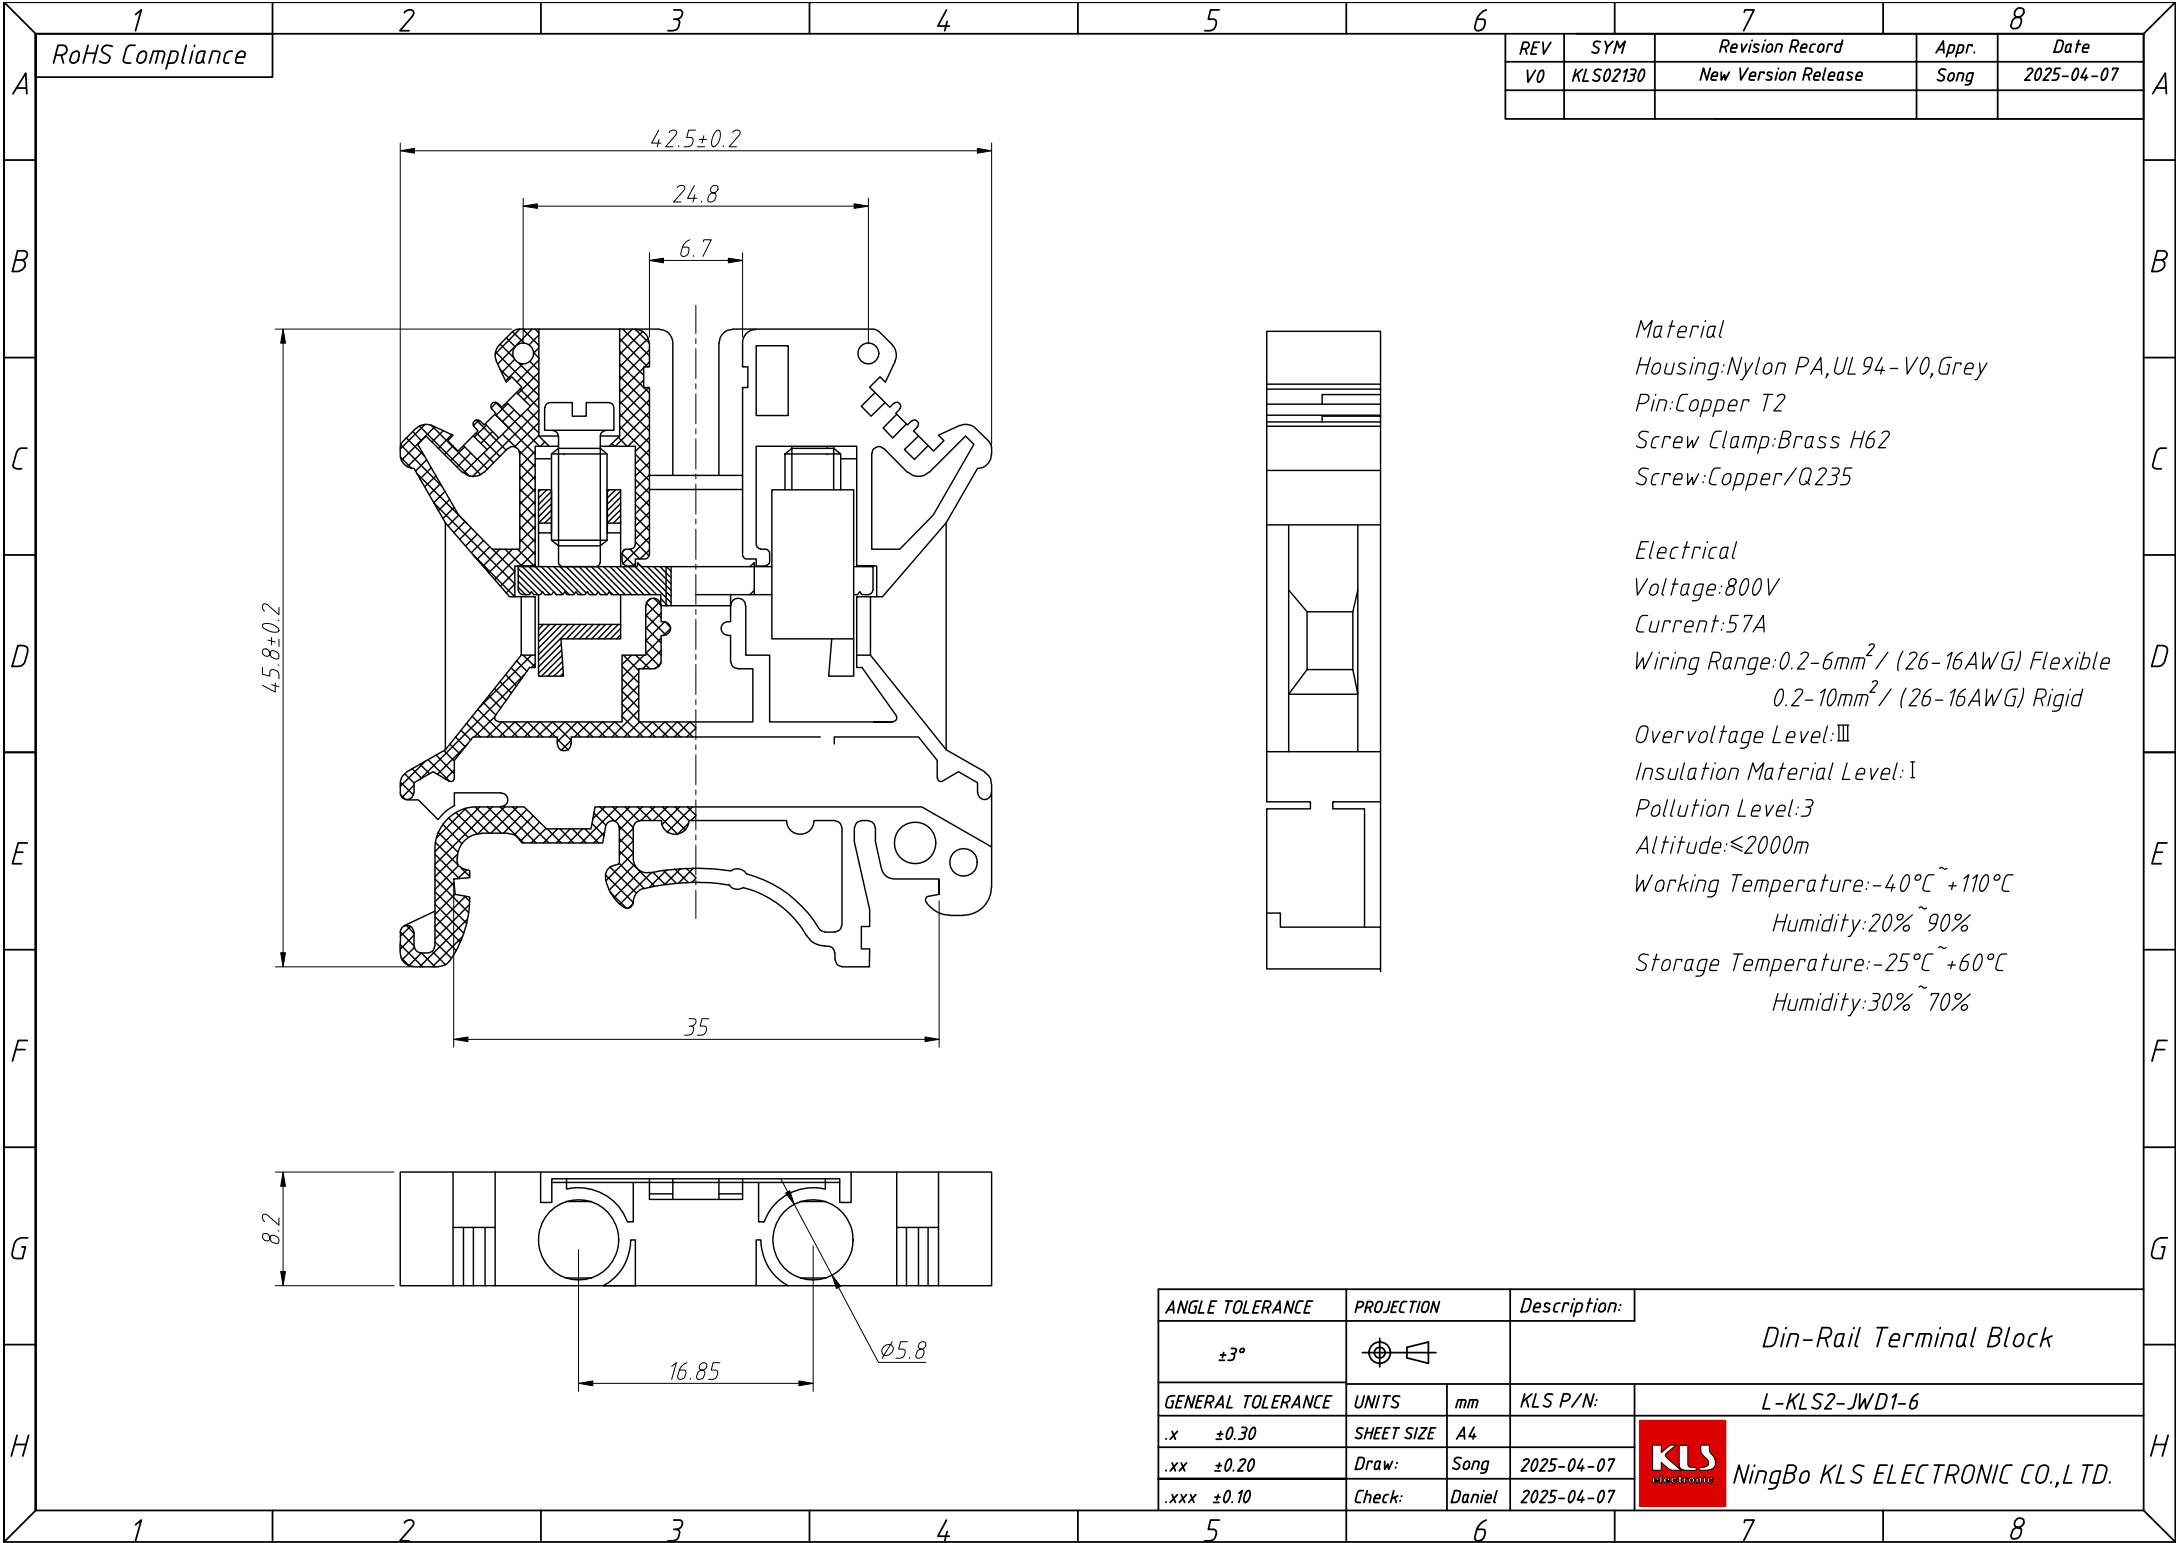

1
RoHS Compliance

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS02130	New Version Release		Song	2025-04-07

Material
Housing:Nylon PA,UL 94 - V0,Grey
Pin:Copper T2
Screw Clamp:Brass H62
Screw:Copper/Q235

Electrical
Voltage:800V
Current:57A
Wiring Range:0.2-6mm² / (26-16AWG) Flexible
0.2-10mm² / (26-16AWG) Rigid
Overvoltage Level:Ⅲ
Insulation Material Level:I
Pollution Level:3
Altitude:≤2000m
Working Temperature:-40℃~+110℃
Humidity:20%~90%
Storage Temperature:-25℃~+60℃
Humidity:30%~70%

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Din-Rail Terminal Block	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
.x	±0.30	SHEET SIZE	A4	L-KLS2-JWD1-6	
.xx	±0.20	Draw:	Song	2025-04-07	NingBo KLS ELECTRONIC CO.,LTD.
.xxx	±0.10	Check:	Daniel	2025-04-07	