

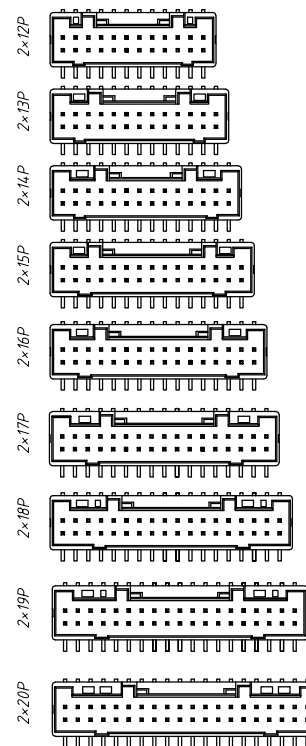


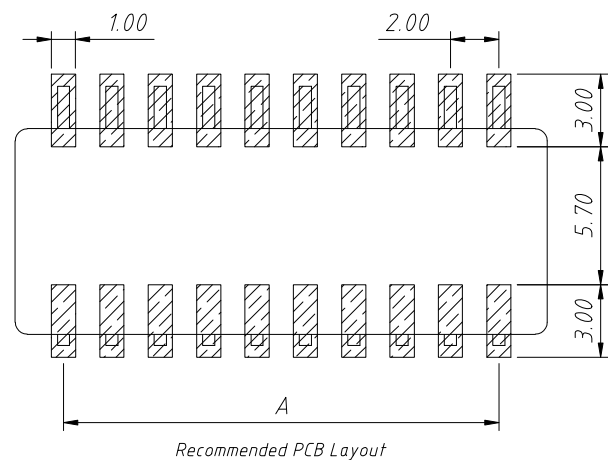
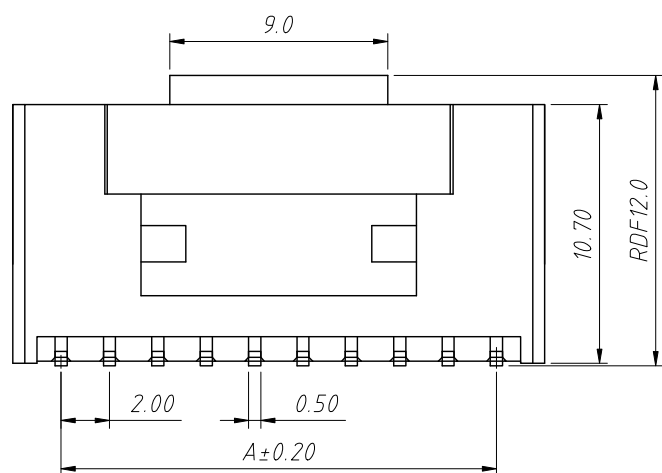
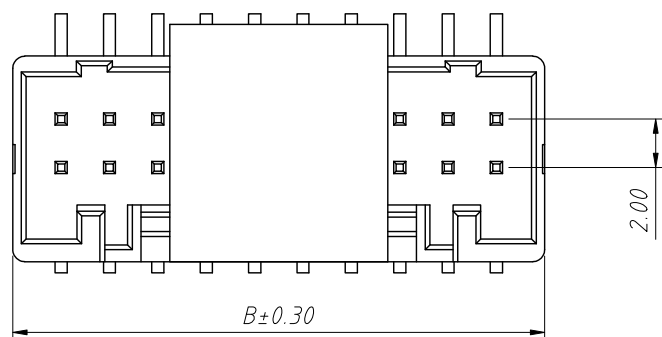





RoHS Compliance



Material:
Housing:LCP,UL 94V-0,Color Black
Contact:Brass,Bright Tin Plating

Electrical Characteristics:
Voltage rating:250V AC / DC
Current rating:3A AC / DC
Withstanding voltage:800V AC/minute
Temperature range:-25°C ~ + 85°C
Insulator Resistance:1000M Ω Min
Contact Resistance:10m Ω Max
After environmental testing:20m Ω Max

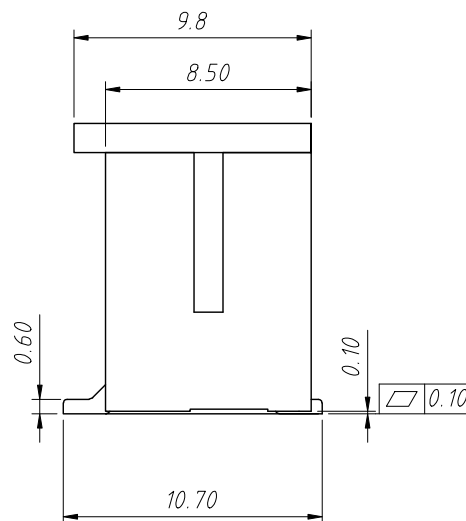

Order Information:

L-KLS1-MU-2.00-2×XX-VM-R

L: RoHS

Pitch:2.00mm

2-Double layer

XX-No.of 04~12 pins

Type:VM-Vertical SMT Pin

Packing:R=Reel Packing

Pin	Dimensions(mm)	
	A	B
2×04	6.00	10.00
2×05	8.00	12.00
2×06	8.00	14.00
2×07	12.00	16.00
02×8	14.00	18.00
2×09	16.00	20.00
2×10	18.00	22.00
2×11	20.00	24.00
2×12	22.00	26.00
2×13	24.00	28.00
2×14	26.00	30.00
2×15	28.00	32.00
2×16	30.00	34.00
2×17	32.00	36.00
2×18	34.00	38.00
2×19	36.00	40.00
2×20	38.00	42.00

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^\circ$				2.00mm Crimp Style Connectors	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-MU-2.00-2×XX-VM-R
x.x	± 0.30	SHEET SIZE	A4		
x.xx	± 0.20	Draw:	Daniel	2022-05-15	
x.xxx	± 0.10	Check:	Daniel	2022-05-15	



NingBo KLS ELECTRONIC CO.,LTD.