

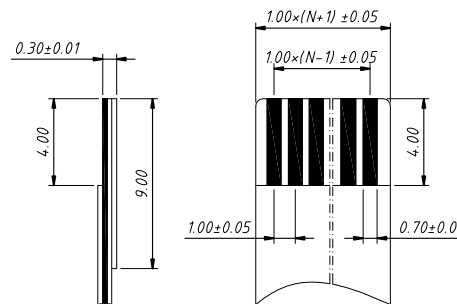
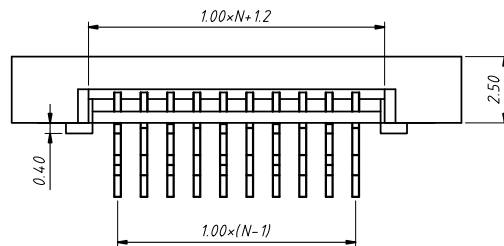
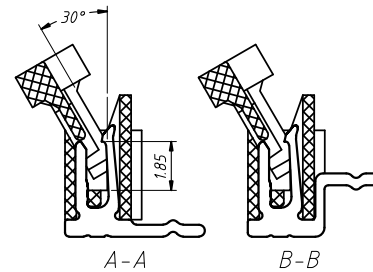



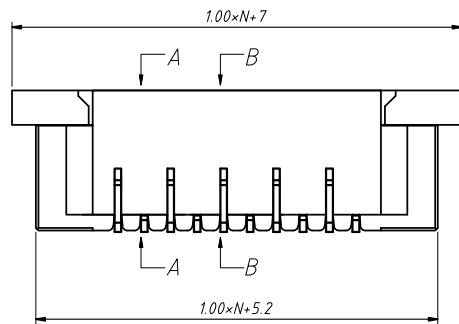

Proper Cable

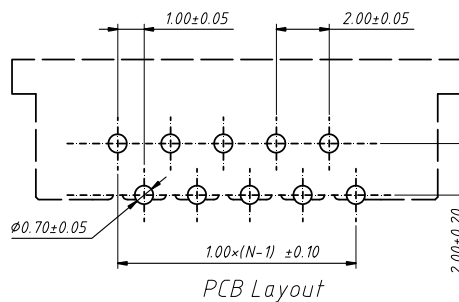

Material
Housing: LCP UL94V-0
Lock: PA46, UL94V-0
Plug spring: Phosphor Bronze, Gold/Tin

Electrical
Voltage rating: 50 V
Current Rating: 0.5 A
Withstanding Voltage: 500 V
Insulation resistance: 800M Ω .Min.
Contact resistance: 20 m Ω .Max.

Mechanical
Temp. Range: -25 °C ~ +85 °C

Order Information

L-KLS1- 1240E - XX -R-A-T

RoHS
Series No.






No. of pins (02 ~ 35 pins)

R-Right angle Pin


A-Anti-needle

Pack: T-Tube

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION			Description:
X. ± 0.15		X. $\pm 5^{\circ}$		UNITS		mm	CONN FFC 1.00mm, Anti-needle,THR, 90°,with ZIF
.X ± 0.03		.X $\pm 3^{\circ}$		SHEET SIZE		A4	
.XX ± 0.05		.XX $\pm 2^{\circ}$				KLS P/N:	
				L-KLS1-1240E-XX-R-A-T			
Draw by: Date		2018-03-10			NingBo KLS ELECTRONIC CO.,L TD.		
Check by:: Date		2018-03-10					
SCALE		SHEET					

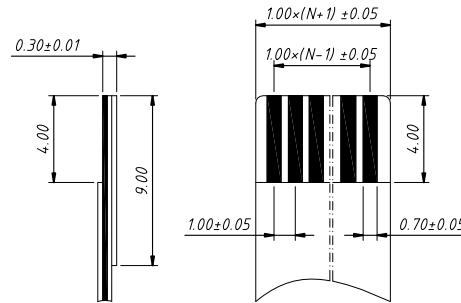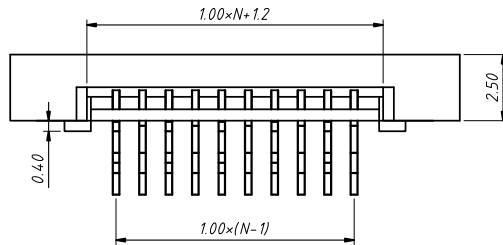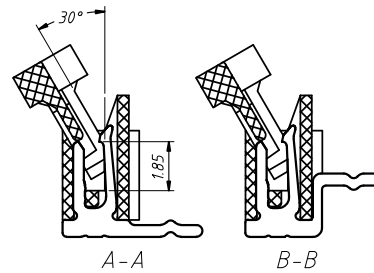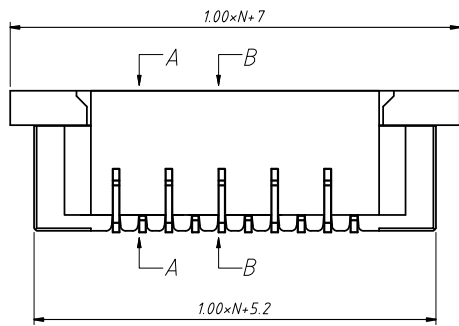

Proper Cable

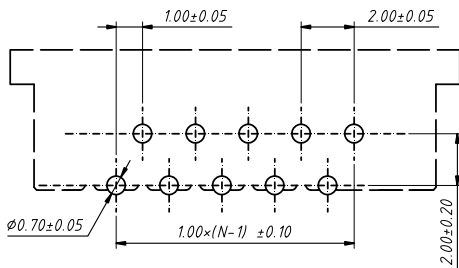

PCB Layout

Material

Housing: LCP UL94V-0

Lock: PA46, UL94V-0

Plug spring: Phosphor Bronze, Gold/Tin

Electrical

Voltage rating: 50 V

Current Rating: 0.5 A

Withstanding Voltage: 500 V

Insulation resistance: 800M Ω .Min.

Contact resistance: 20 m Ω .Max.

Mechanical

Temp. Range: -25 °C ~ +85 °C

Order Information

L-KLS1- 1240E - XX -R-P-T

RoHS

Series No.

No. of pins (02 ~ 35 pins)

R-Right angle Pin

P-Positive needle

Pack: T-Tube

GENERAL TOLERANCE			ANGLE TOLERANCE			PROJECTION		Description:									
X. ±0.15			X. ±5°			UNITS	mm		CONN FFC 1.00mm,								
.X ±0.03			.X ±3°			SHEET SIZE			A4		Positive needle, THR, 90°,with ZIF						
.XX ±0.05			.XX ±2°						KLS P/N:								
										L-KLS1-1240E-XX-R-P-T							
Draw by: Date			2018-03-10					NingBo KLS ELECTRONIC CO.,L TD.									
Check by:: Date			2018-03-10														
SCALE														SHEET			