


Toggle switches


L-KLS7-SMS-103-C2T Sub-Miniature Toggle Switch

SPECIFICATIONS:

Rating: 3A 125VAC; 1.5A 250VAC
Contact Resistance: 20mΩ max
Insulation Resistance: 500V DC 1000MΩ Min
Dielectric Strength: 1000V AC 1 Minute
Operating Temperature: -25°C +85°C
Electrical Life :10,000 cycles

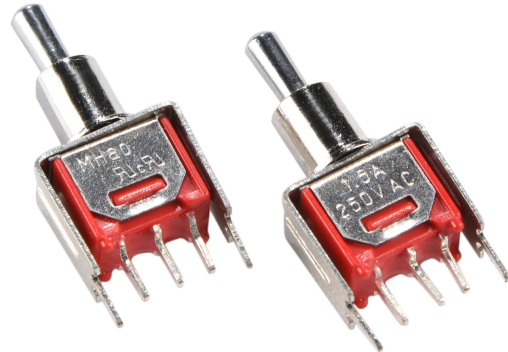


Outline Drawing

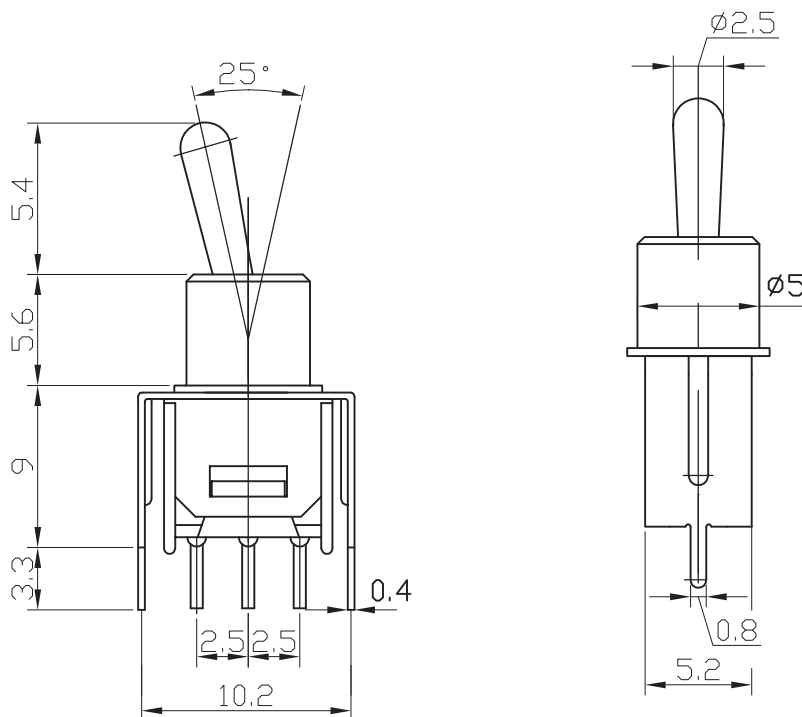

ORDER INFORMATION

L-KLS7-SMS-103-C2T

PartNumber	Terminal Type: 2=Pc terminal
SMS:Toggle Switch Series	Handle Type: A=Standard
POLES:1=Single Pole	CIRCUIT:03=ON-OFF-ON

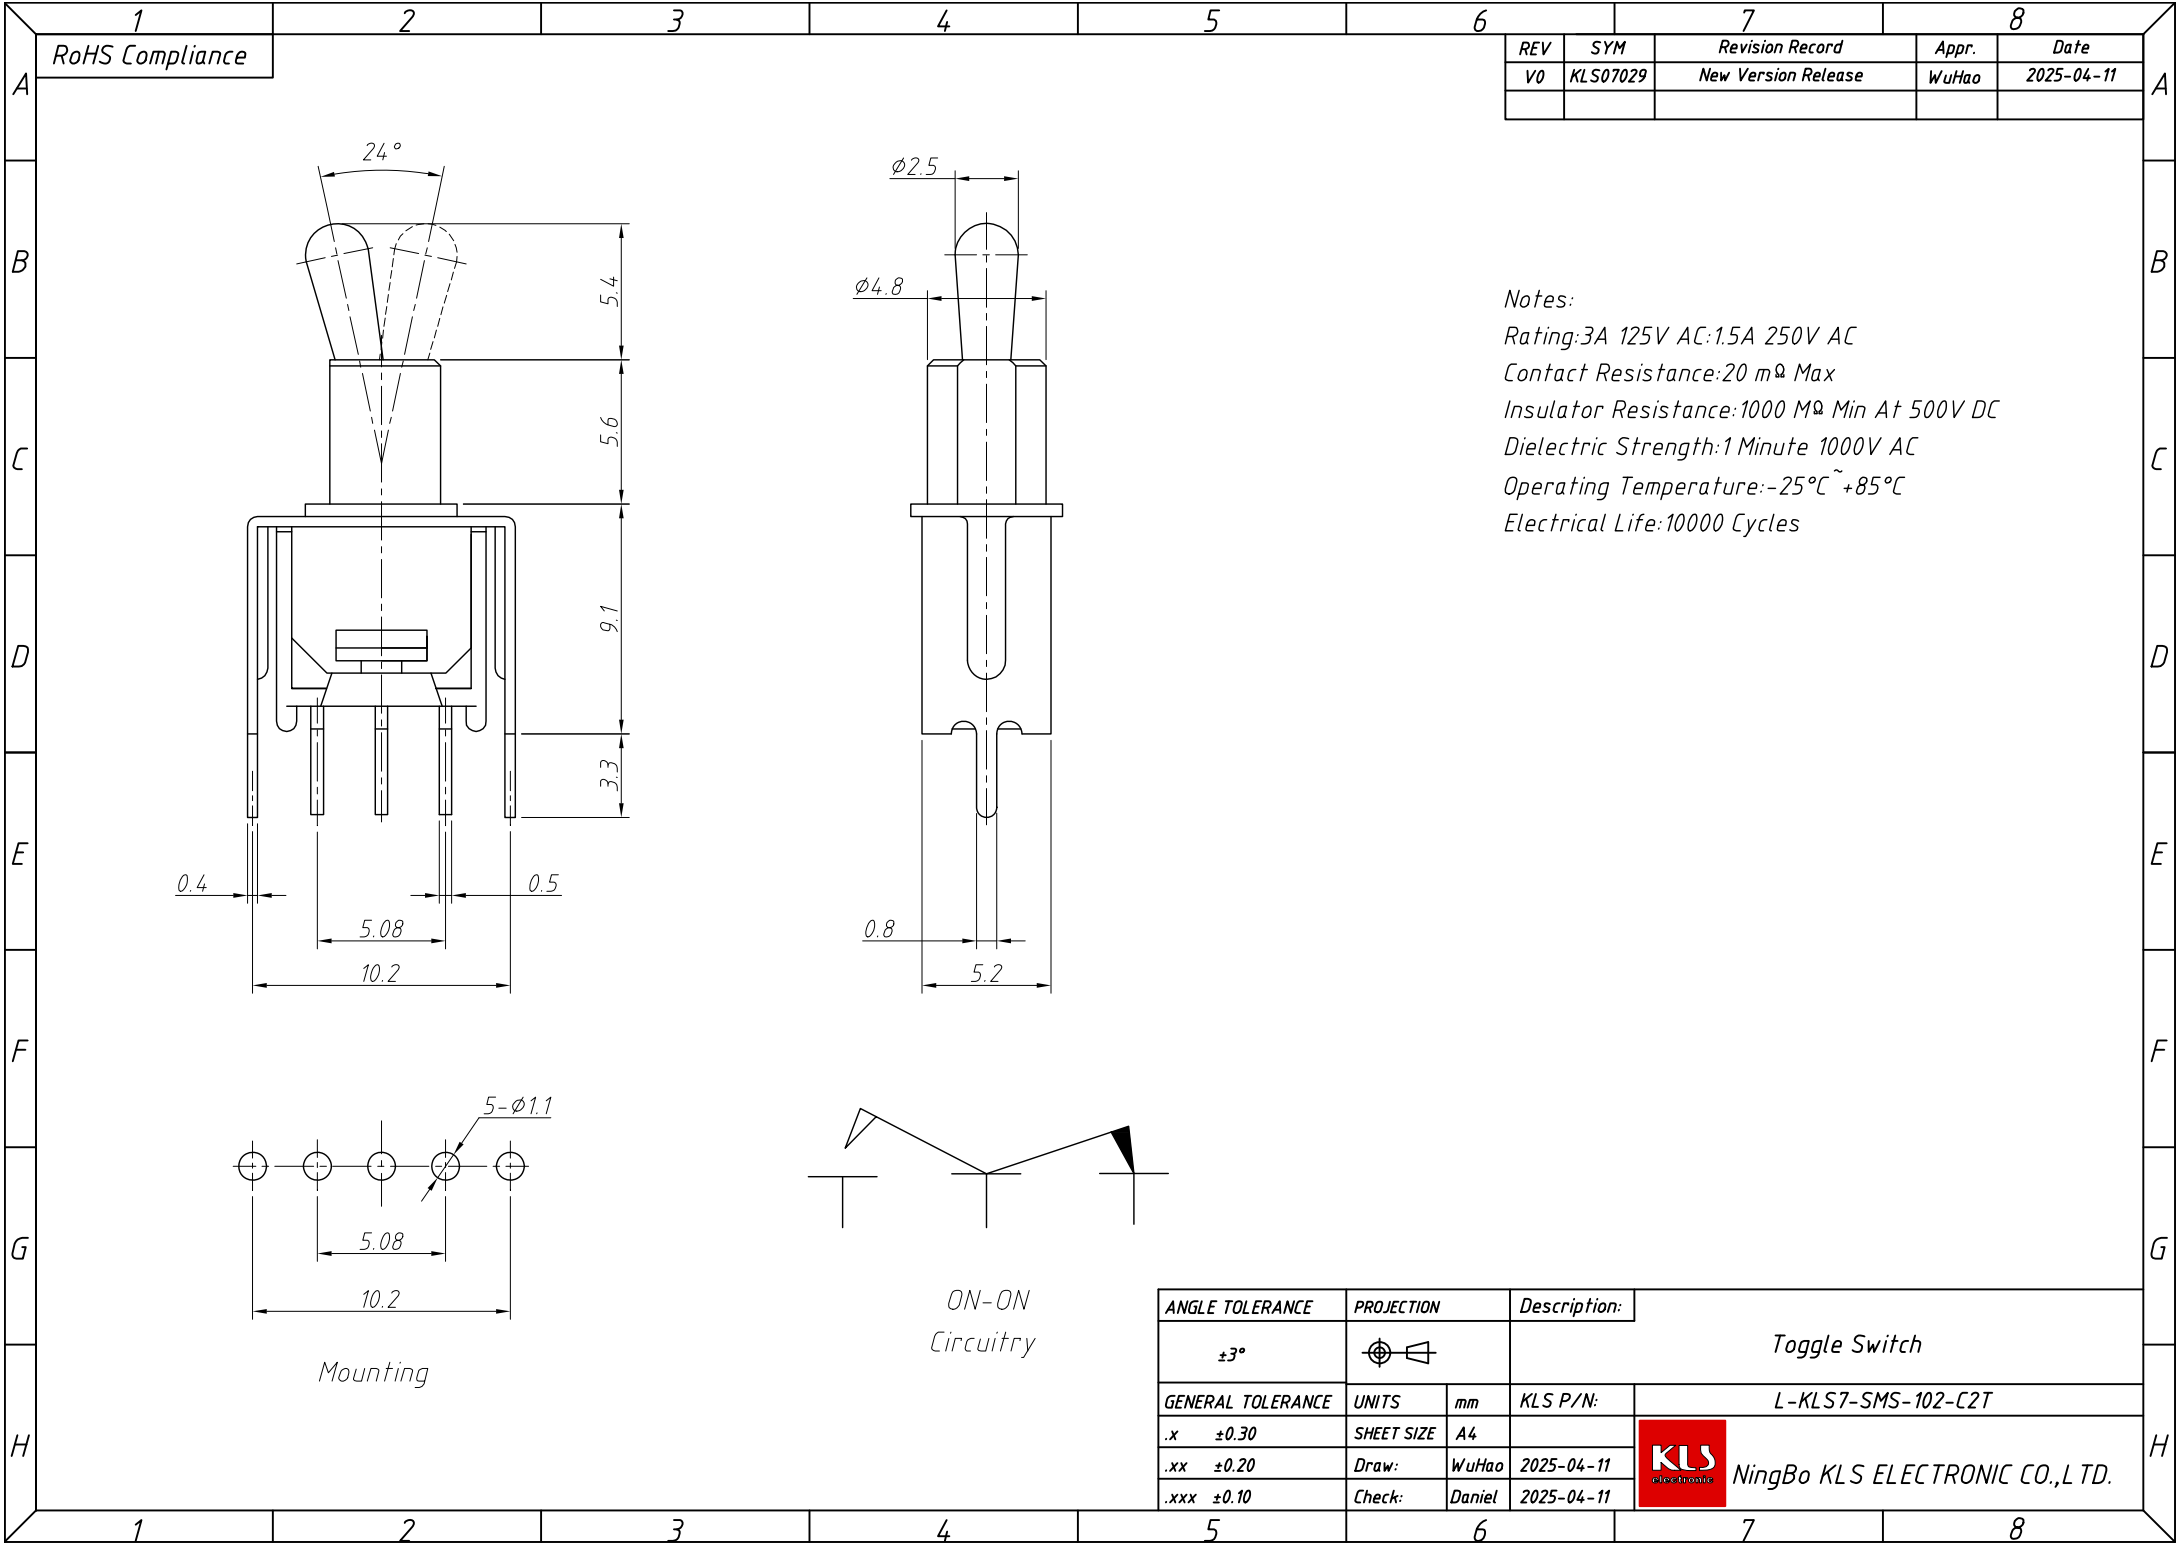

1
RoHS Compliance

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS07029	New Version Release		WuHao	2025-04-11

Notes:
Rating:3A 125V AC:1.5A 250V AC
Contact Resistance:20 mΩ Max
Insulator Resistance:1000 MΩ Min At 500V DC
Dielectric Strength:1 Minute 1000V AC
Operating Temperature:-25℃~+85℃
Electrical Life:10000 Cycles

Mounting

ON-ON
Circuitry

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Toggle Switch	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
.x ±0.30		SHEET SIZE	A4	L-KLS7-SMS-102-C2T	
.xx ±0.20		Draw:	WuHao	2025-04-11	NingBo KLS ELECTRONIC CO.,LTD.
.xxx ±0.10		Check:	Daniel	2025-04-11	