


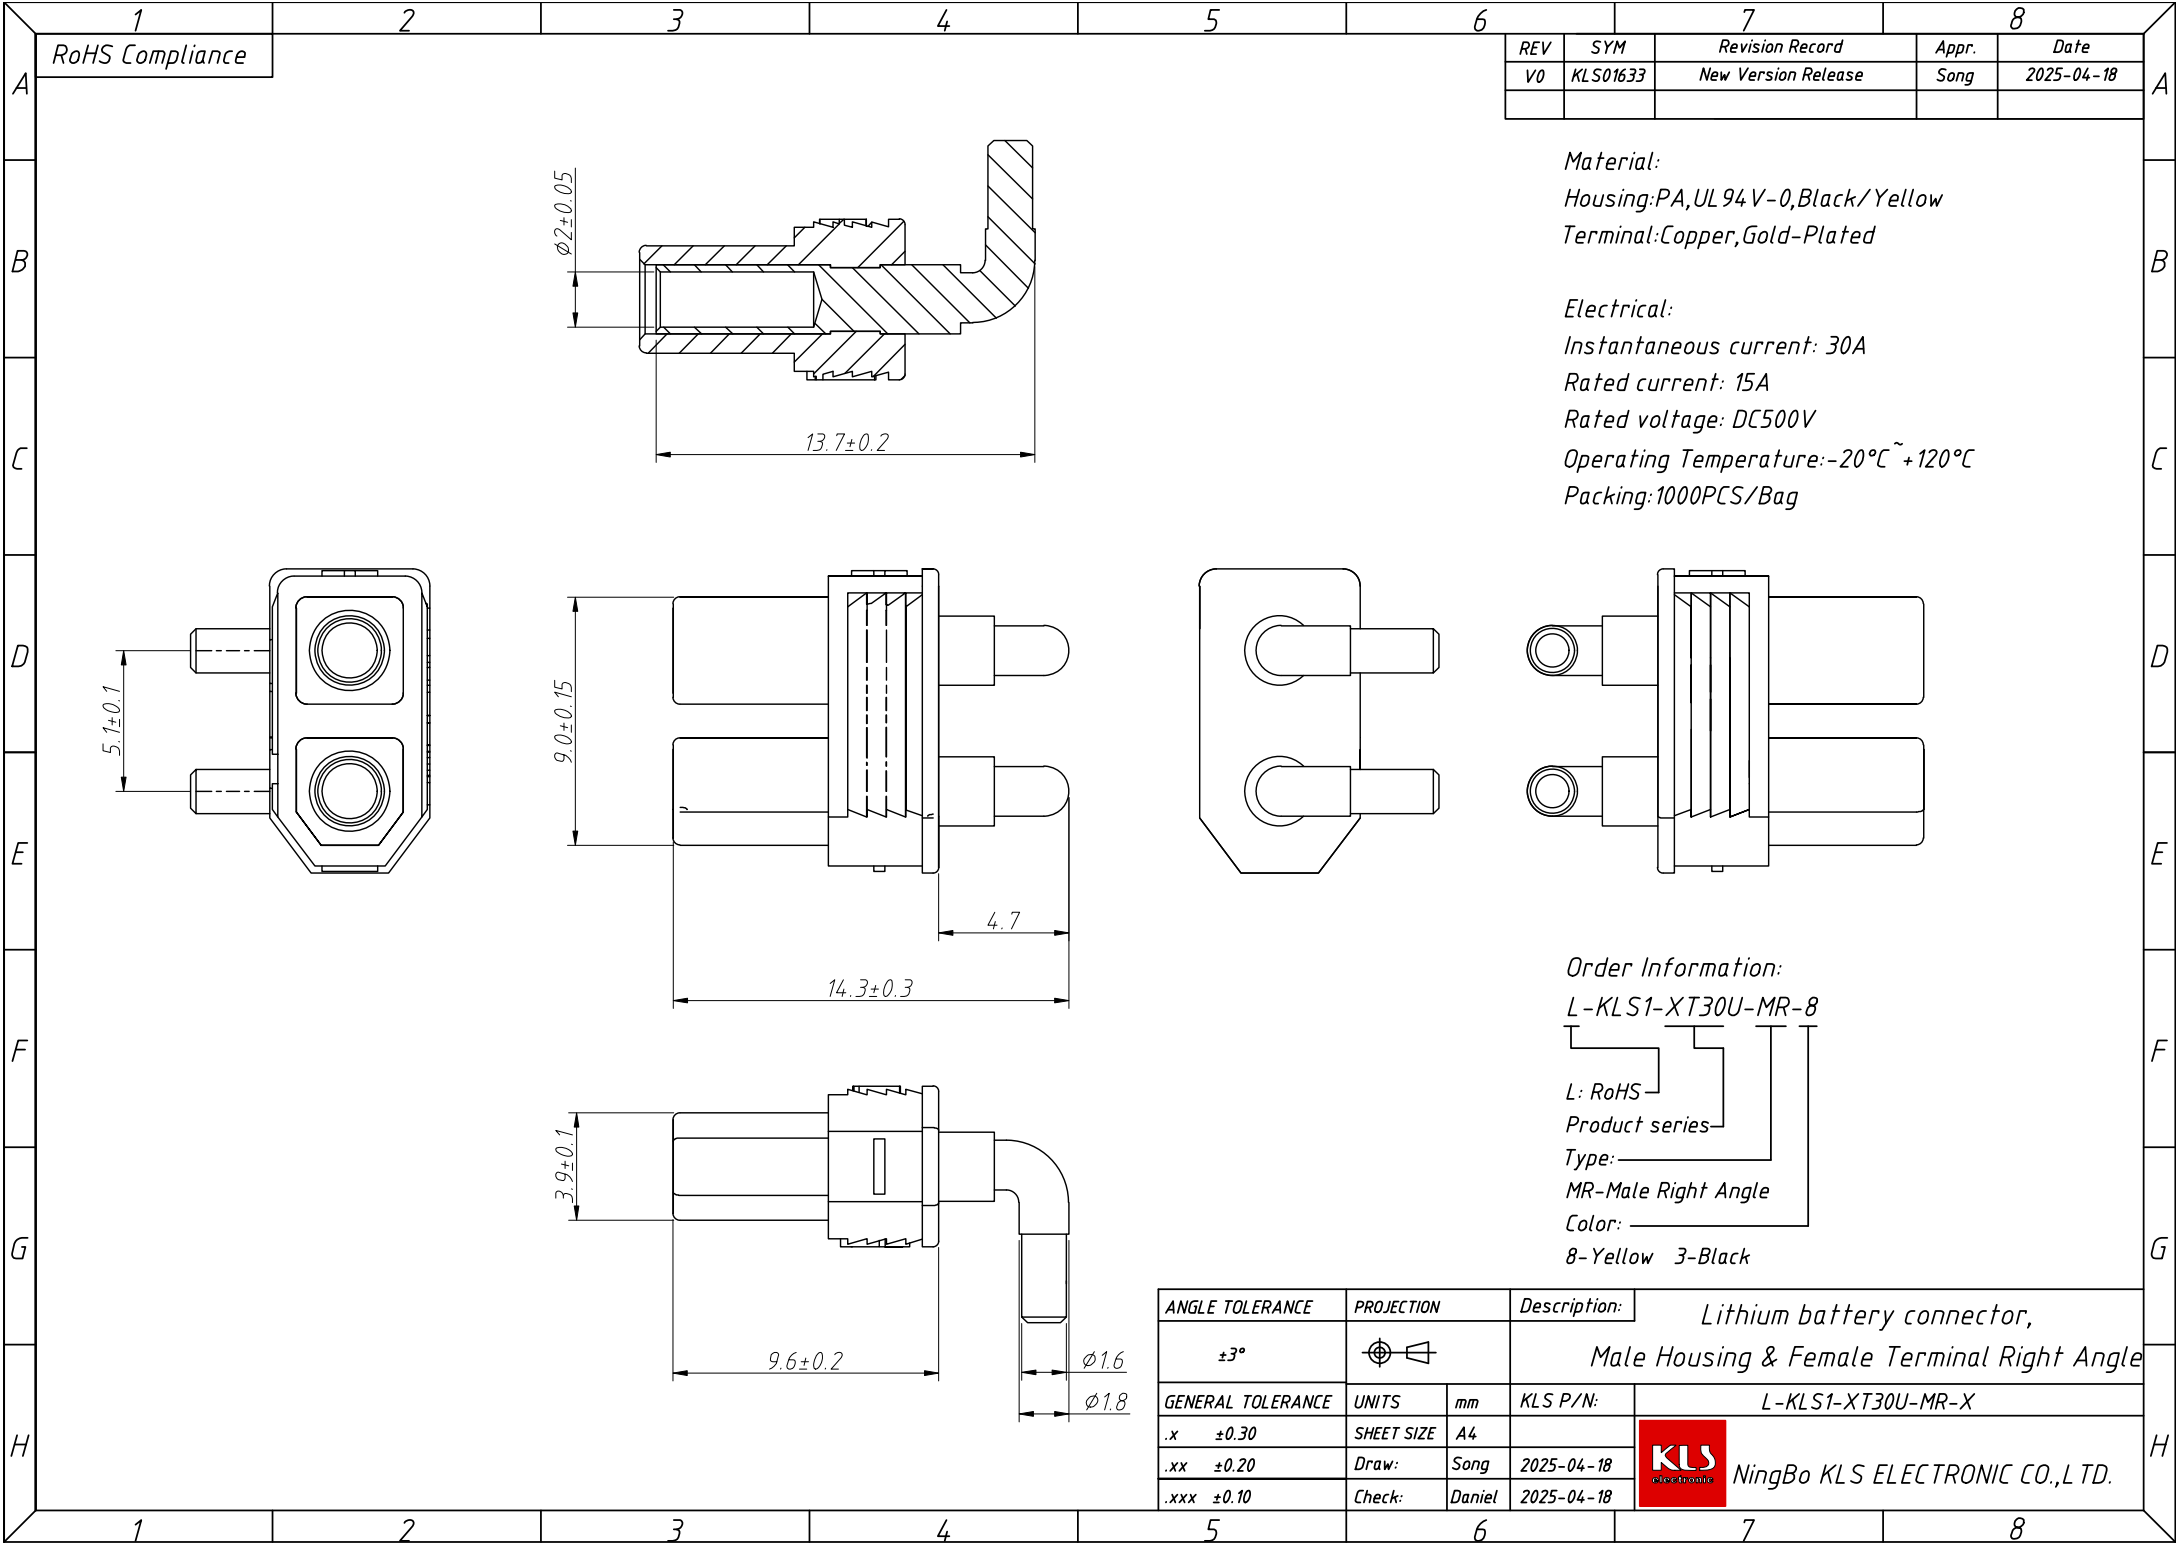

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01633	New Version Release	Song	2025-04-18

Material:
Housing:PA,UL 94 V-0,Black/ Yellow
Terminal:Copper,Gold-Plated

Electrical:
Instantaneous current: 30A
Rated current: 15A
Rated voltage: DC500V
Operating Temperature:-20℃~+120℃
Packing:1000PCS/Bag

Order Information:
L-KLS1-XT30U-MR-8
L: RoHS
Product series
Type:
MR-Male Right Angle
Color:
8-Yellow 3-Black

ANGLE TOLERANCE	PROJECTION	Description:	Lithium battery connector, Male Housing & Female Terminal Right Angle
$\pm 3^{\circ}$			
GENERAL TOLERANCE	UNITS	mm	KLS P/N: L-KLS1-XT30U-MR-X
.x ± 0.30	SHEET SIZE	A4	
.xx ± 0.20	Draw:	Song	2025-04-18
.xxx ± 0.10	Check:	Daniel	2025-04-18



NingBo KLS ELECTRONIC CO.,L TD.