


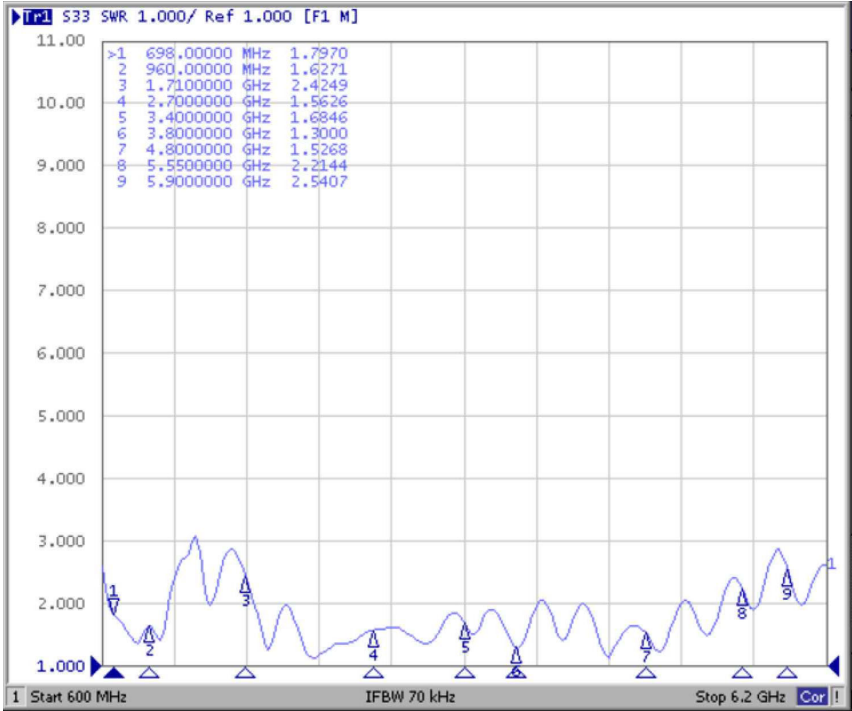

Material:

Antenna element:FR-4

Installation method:3M TAPE

Shell :ABS Black

Cable:RG174 COAXIAL CABLE,50ohm

Connector:SMAJ

H.S Tube:Heat Shrink Tube

Performance parameters:

Frequency Range:698-6000MHz

Band Width:260/990MHz

Vswr:3.0 Max

Gain:1.5 DBi Max

Impedance:50 OHM

Polarization:Vertical

Radiation:OMNIDIRECTIONAL

Max Power:10 W

Connector:SMAJ

Cable:RG174,L=3000mm


Dimensions:116mm×21.5mm

Temperature:-40°~+85°

The Assembly Of Each Component Should Be Firm And Reliable

The Signal Parameters Of The Finished Product Must Reach The Specified Value

The Product Needs To Be Packaged In Quantity According To The Requirements, And There Should Be No Obvious Signs During Transportation Phenomena Such As Compression Deformation

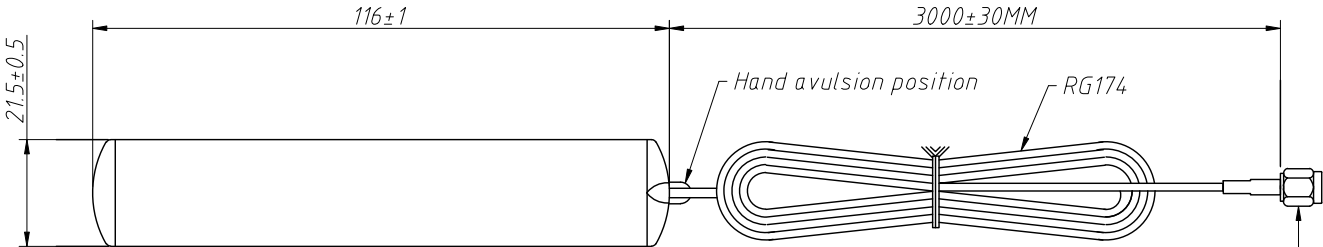

Back 3M tape
(white characters on red background with Hand avulsion position)

ANGLE TOLERANCE	PROJECTION	Description:	Surface Mount Antenna	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-CZ10-RG174-L3M
.x ±0.30	SHEET SIZE	A4		
.xx ±0.20	Draw:	Song	2025-05-07	NingBo KLS ELECTRONIC CO.,L TD.
.xxx ±0.10	Check:	Daniel	2025-05-07	