


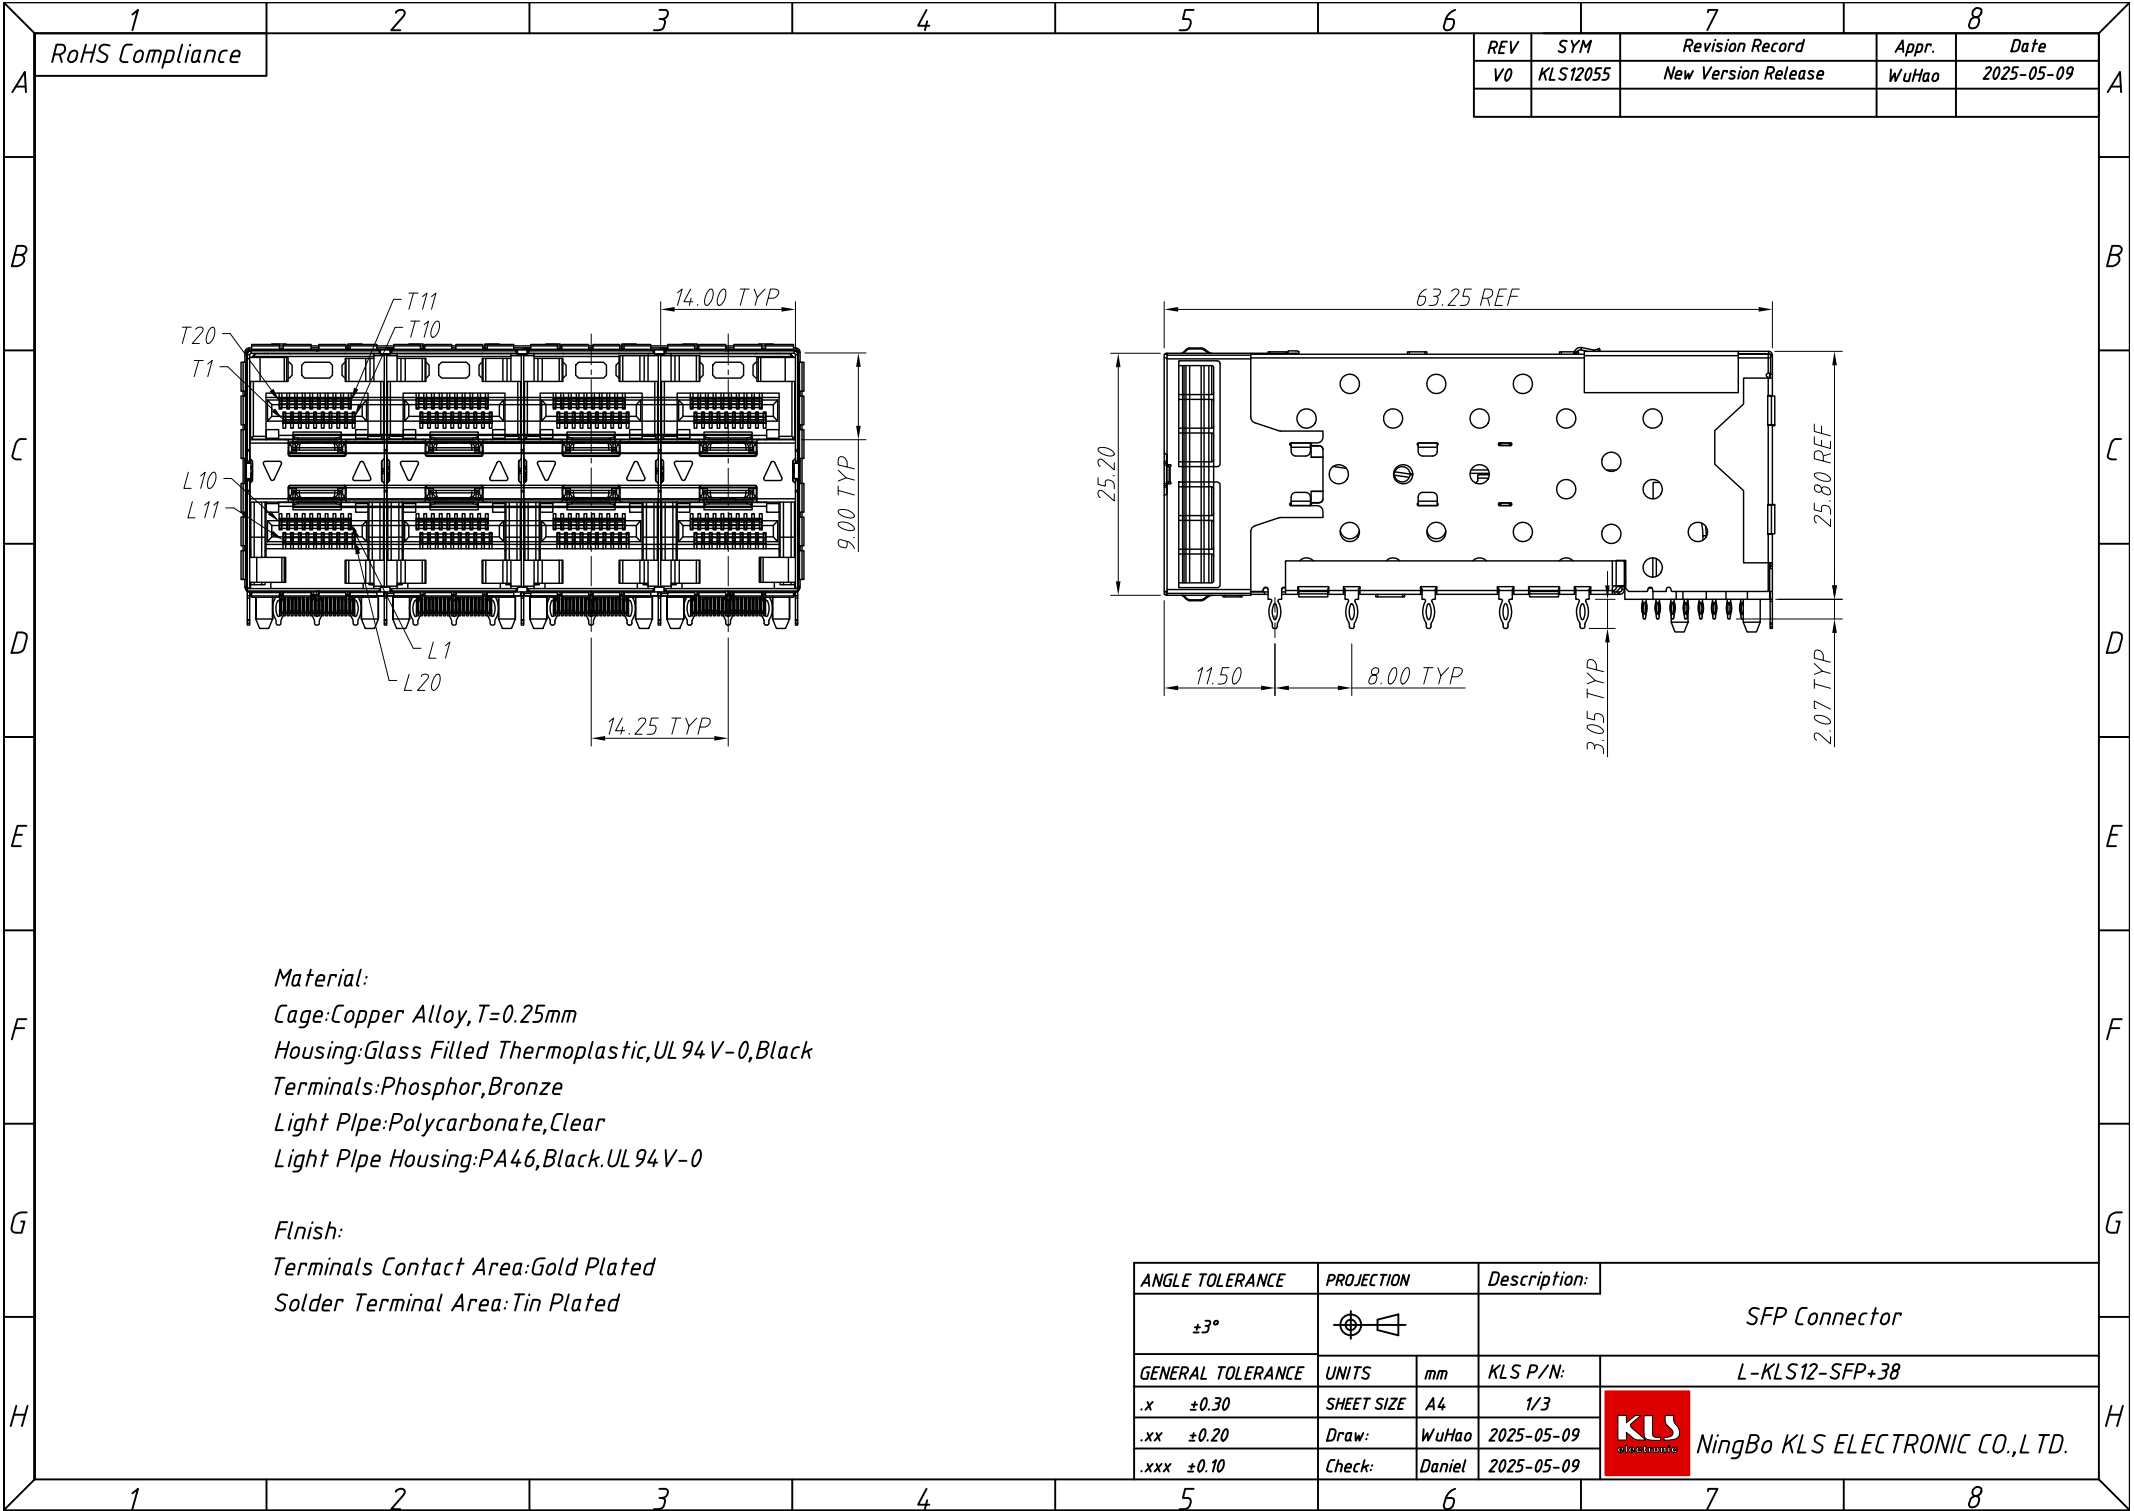

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS12055	New Version Release	WuHao	2025-05-09

Material:
Cage: Copper Alloy, T=0.25mm
Housing: Glass Filled Thermoplastic, UL 94 V-0, Black
Terminals: Phosphor, Bronze
Light Pipe: Polycarbonate, Clear
Light Pipe Housing: PA46, Black, UL 94 V-0


Finish:
Terminals Contact Area: Gold Plated
Solder Terminal Area: Tin Plated

ANGLE TOLERANCE	PROJECTION	Description:
$\pm 3^{\circ}$		SFP Connector
GENERAL TOLERANCE	UNITS	mm
.x ± 0.30	SHEET SIZE	A4
.xx ± 0.20	Draw:	WuHao
.xxx ± 0.10	Check:	Daniel

KLS

electronics

NingBo KLS ELECTRONIC CO.,LTD.

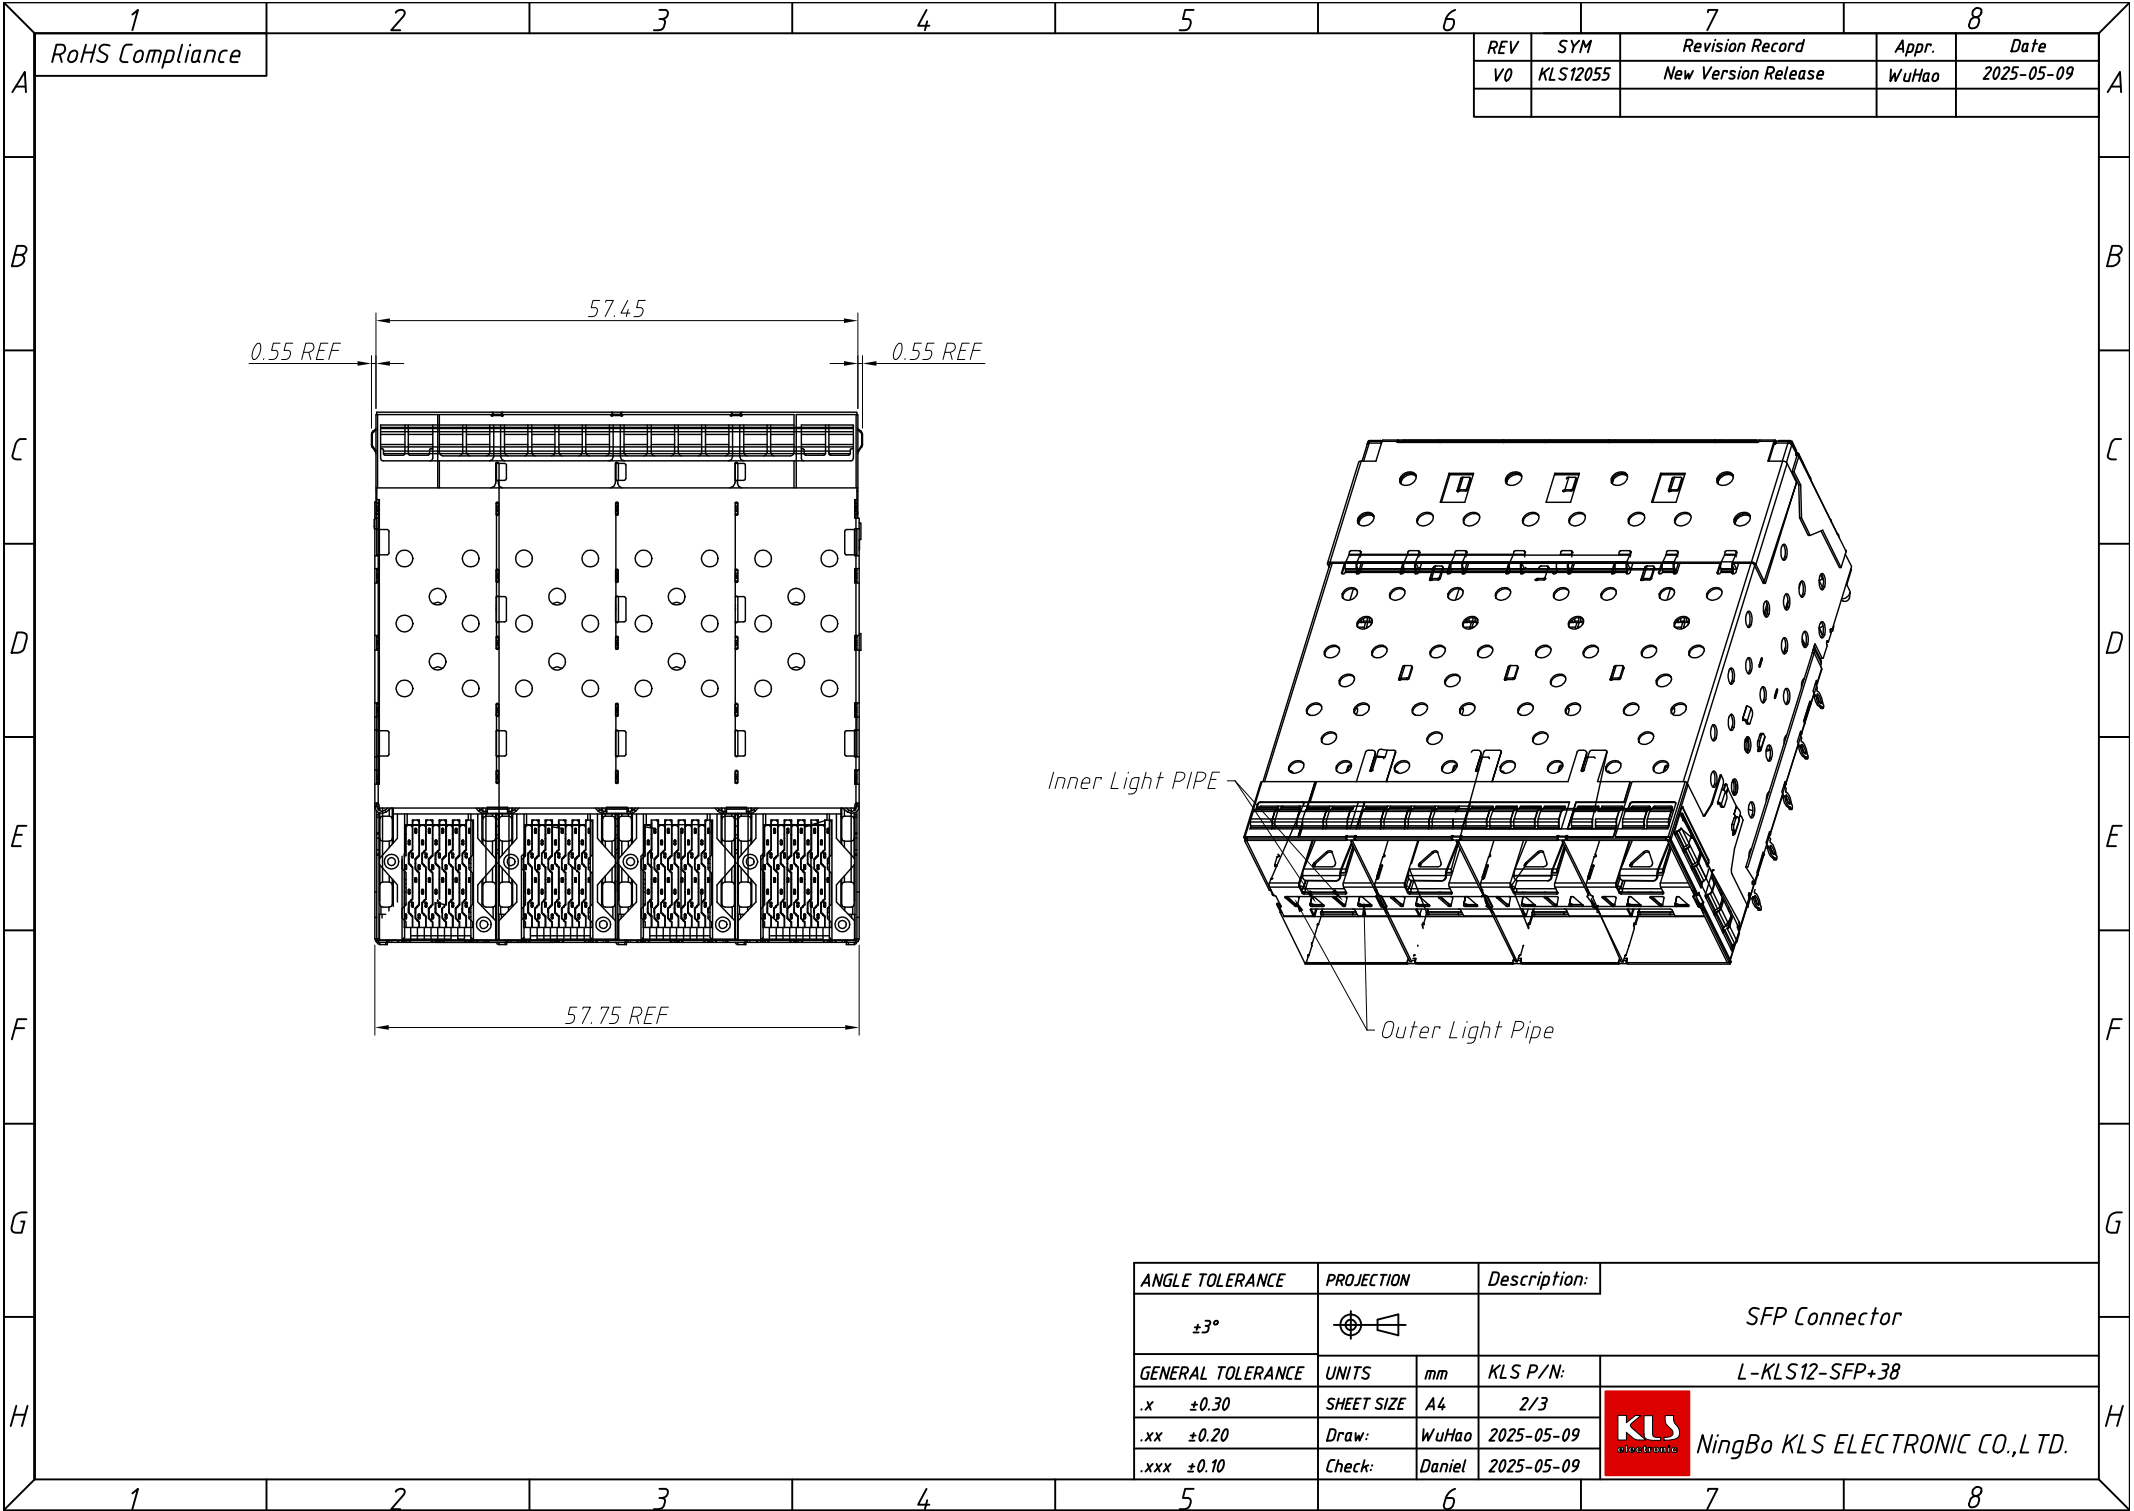


RoHS Compliance


REV	SYM	Revision Record	Appr.	Date
V0	KLS12055	New Version Release	WuHao	2025-05-09

ANGLE TOLERANCE		PROJECTION	Description:	
$\pm 3^{\circ}$			SFP Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:
.x	± 0.30	SHEET SIZE	A4	2/3
.xx	± 0.20	Draw:	WuHao	2025-05-09
.xxx	± 0.10	Check:	Daniel	2025-05-09


 NingBo KLS ELECTRONIC CO.,LTD.

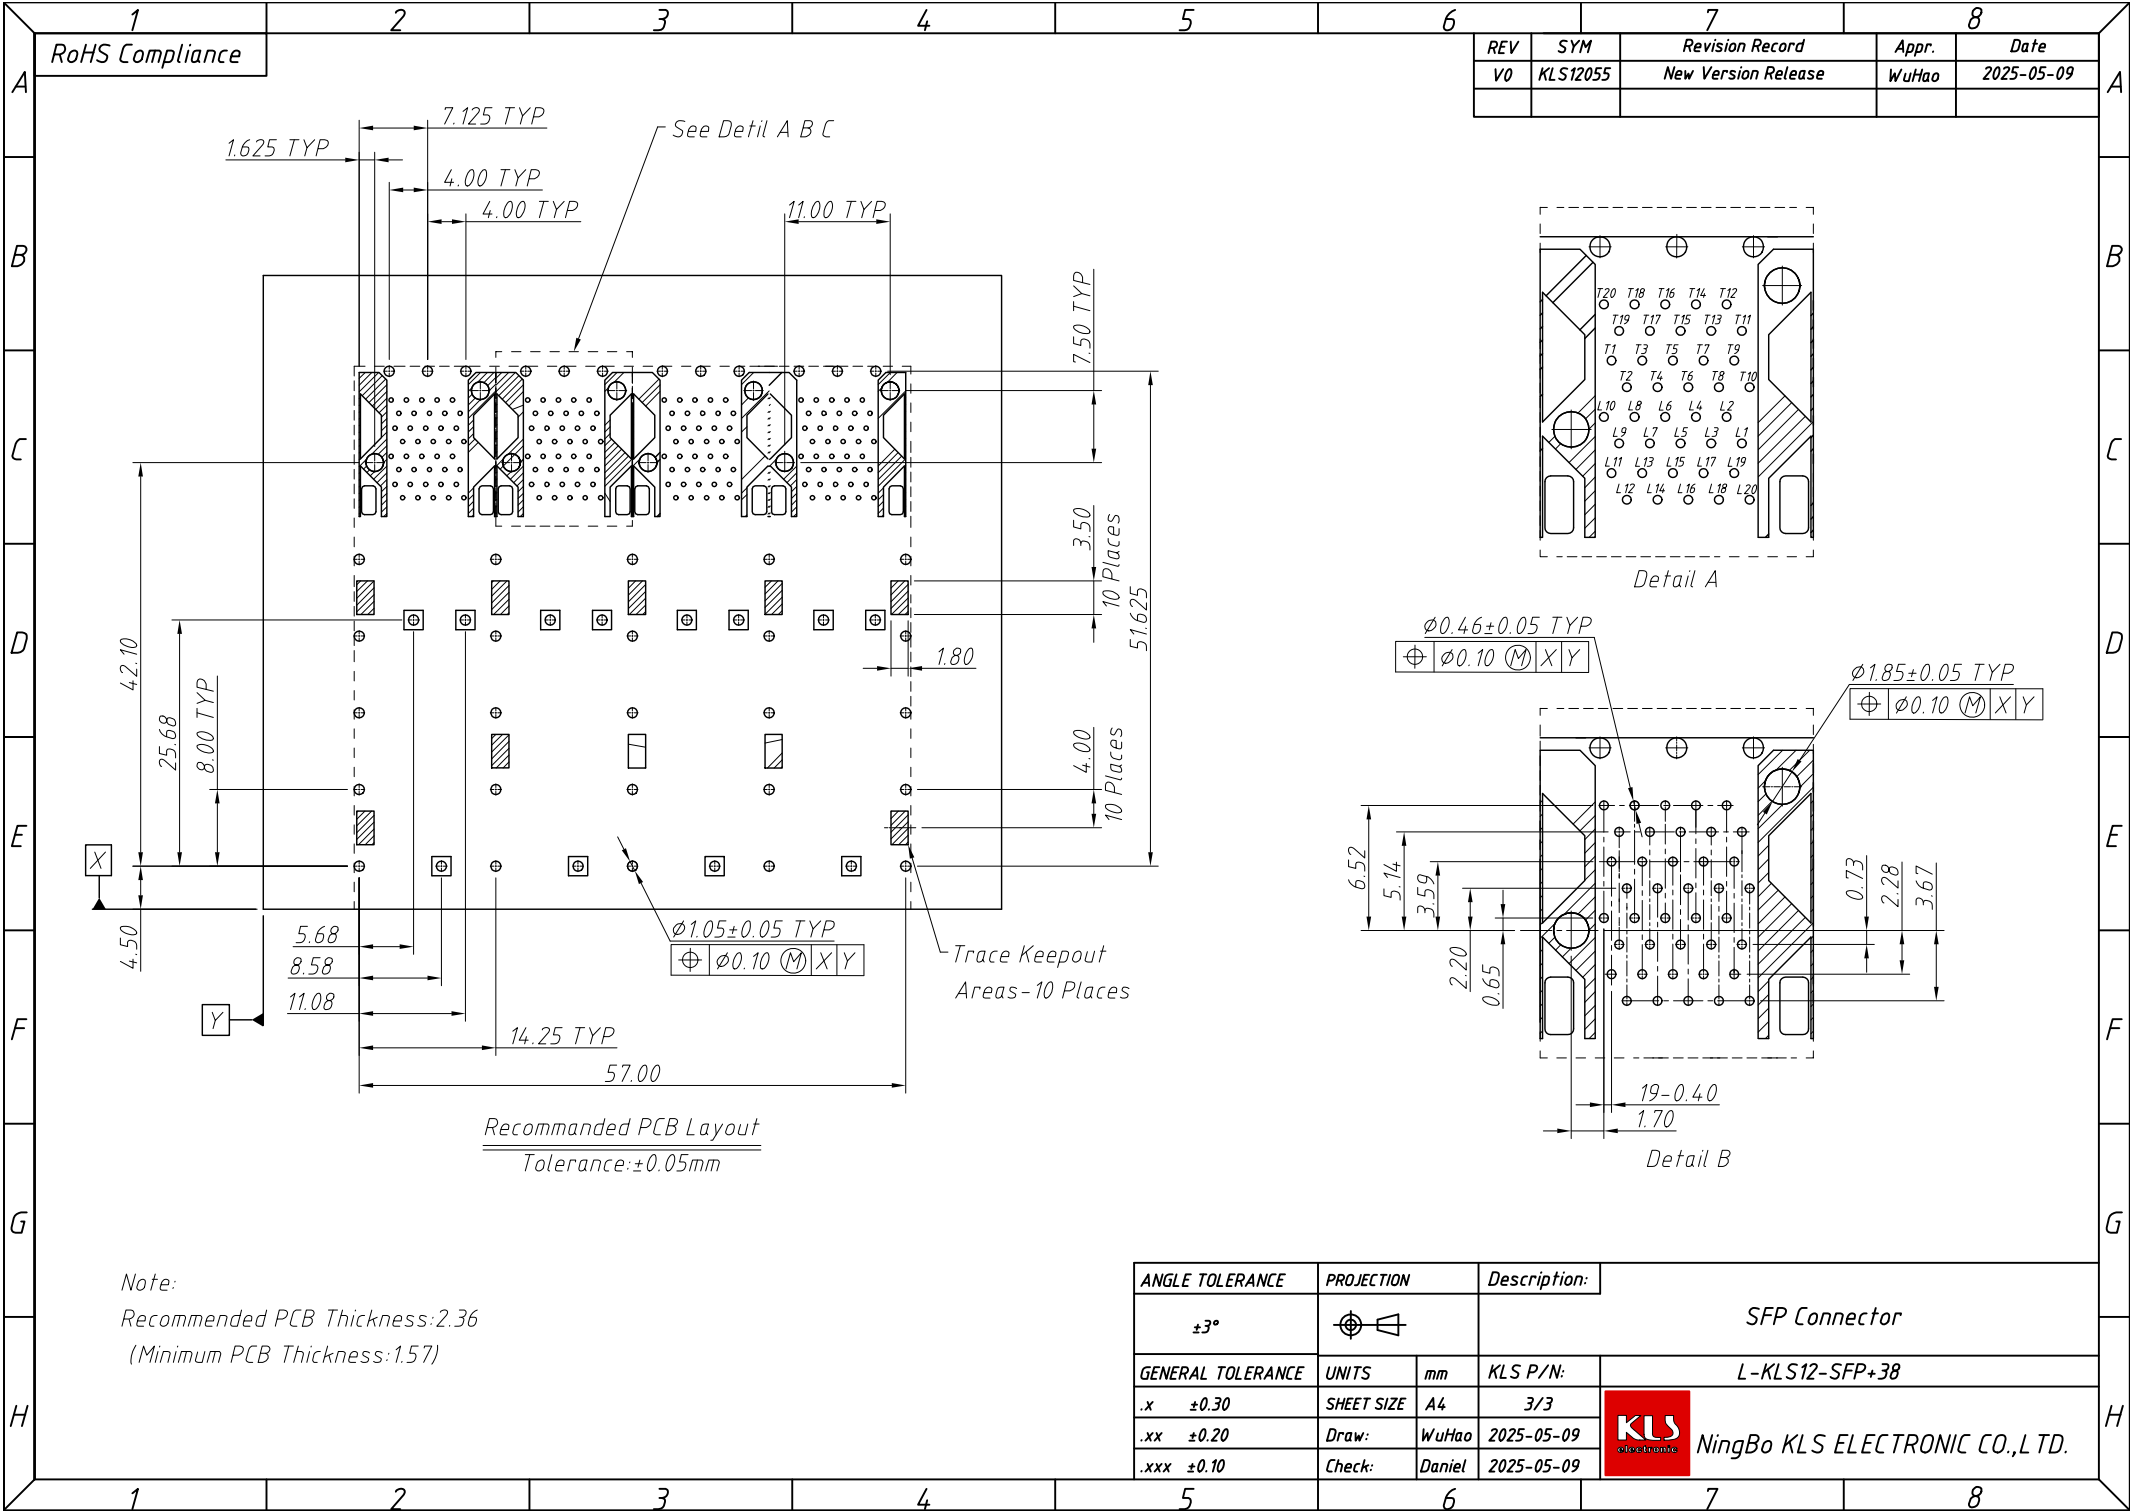

Recommanded PCB Layout
Tolerance:±0.05mm

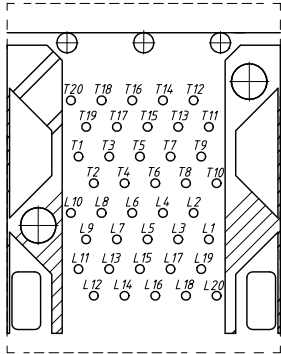

Detail A

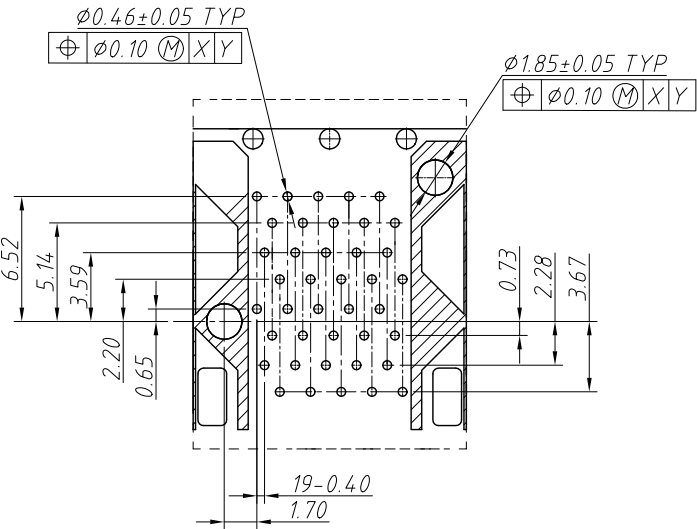

Detail B

Note:
Recommended PCB Thickness:2.36
(Minimum PCB Thickness:1.57)

ANGLE TOLERANCE		PROJECTION	Description:	
±3°			SFP Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:
.x ±0.30		SHEET SIZE	A4	3/3
.xx ±0.20		Draw:	WuHao	2025-05-09
.xxx ±0.10		Check:	Daniel	2025-05-09

NingBo KLS ELECTRONIC CO.,LTD.