


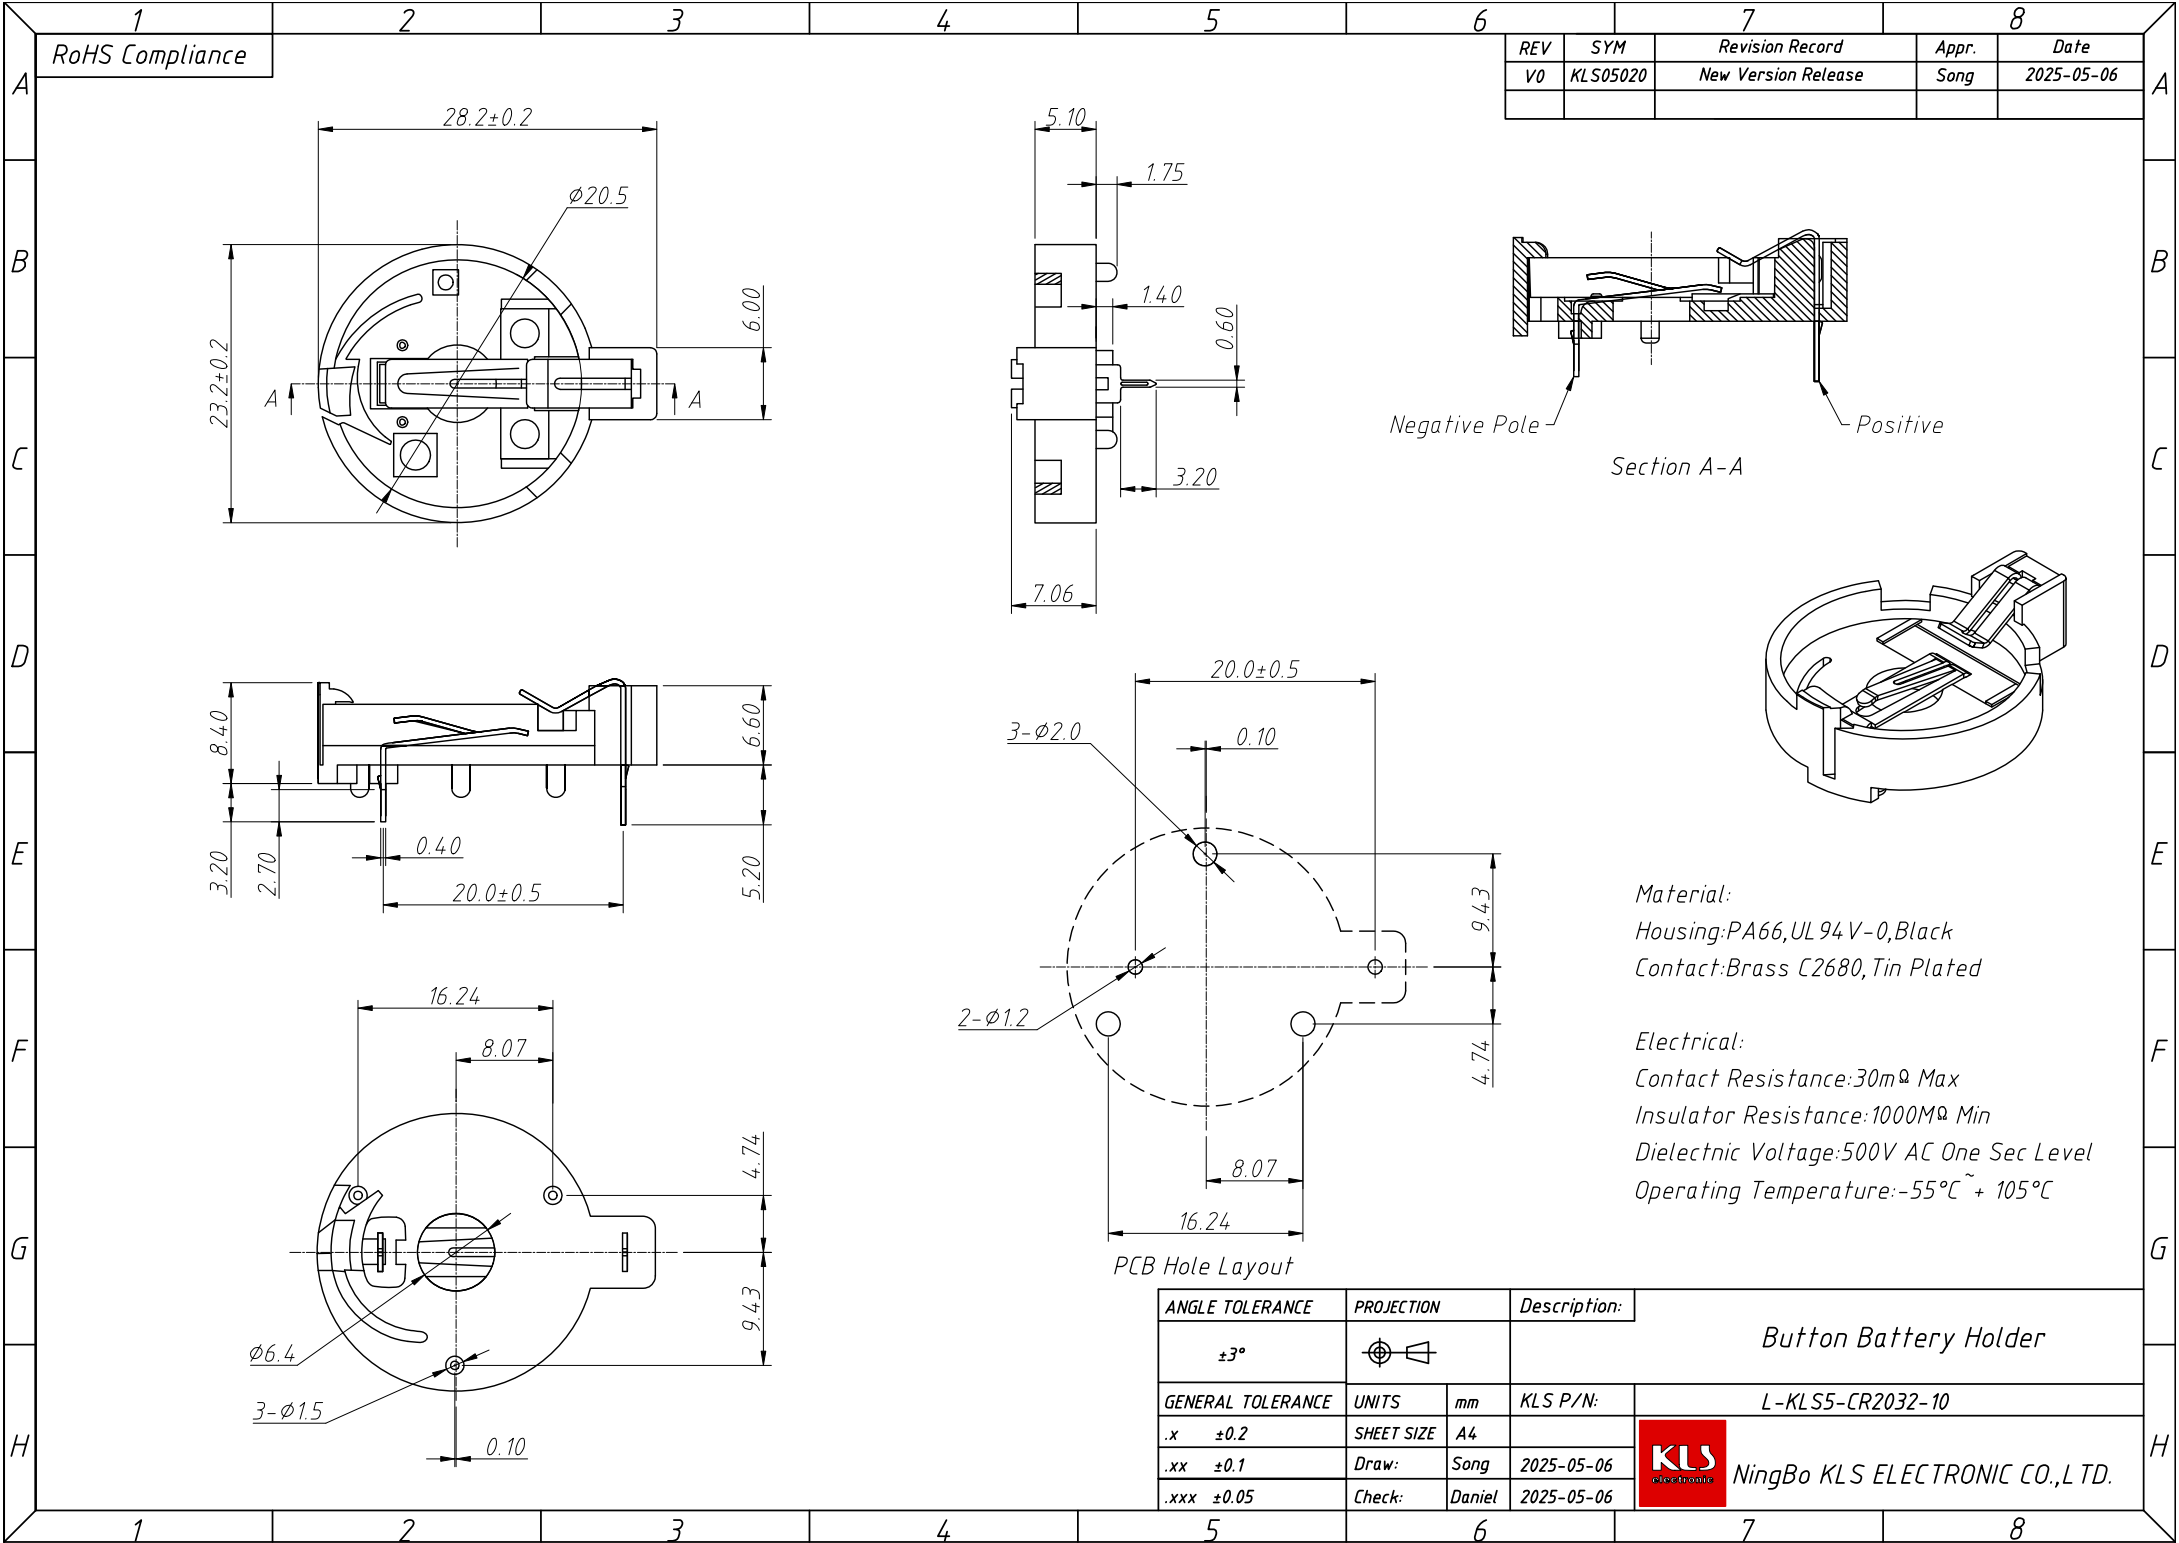

1
RoHS Compliance

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS05020	New Version Release		Song	2025-05-06

Material:
Housing:PA66,UL 94 V-0,Black
Contact:Brass C2680,Tin Plated

Electrical:
Contact Resistance:30mΩ Max
Insulator Resistance:1000MΩ Min
Dielectric Voltage:500V AC One Sec Level
Operating Temperature:-55℃~+105℃

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Button Battery Holder	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
.x	±0.2	SHEET SIZE	A4	L-KLS5-CR2032-10	
.xx	±0.1	Draw:	Song	2025-05-06	NingBo KLS ELECTRONIC CO.,LTD.
.xxx	±0.05	Check:	Daniel	2025-05-06	