


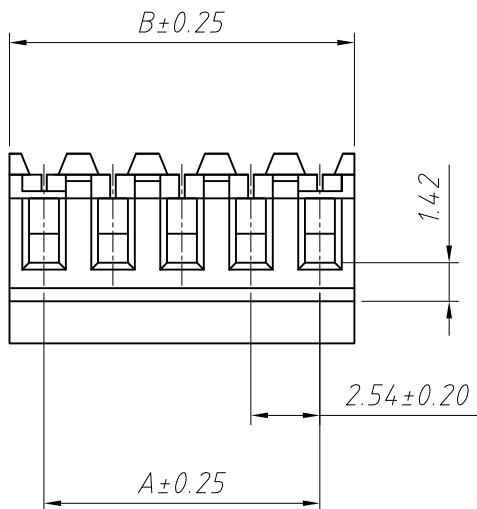

Pin	Dimension mm		Pin	Dimension mm	
	A	B		A	B
02	2.54	5.08	14	33.02	35.56
03	5.08	7.62	15	35.56	38.10
04	7.62	10.16	16	38.10	40.64
05	10.16	12.70	17	40.64	43.18
06	12.70	15.24	18	43.18	45.72
07	15.24	17.78	19	45.72	48.26
08	17.78	20.32	20	48.26	50.80
09	20.32	22.86	21	50.80	53.34
10	22.86	25.40	22	53.34	55.88
11	25.40	27.91	23	55.88	58.42
12	27.94	30.48	24	58.42	60.96
13	30.48	33.02			

Material:

Housing: PA66 UL94V-2

Contacts: Phosphor bronze

Plating: Tin 50u" over 100u" nickel

Electrical Specification:

Rated Voltage: 250V AC/DC

Rated Current: 3A

Contact Resistance: 20mΩ max

Insulation Resistance: 1000MΩ min

Withstand voltage: 1500V AC/MIN

Temperature range for usage : -40°C ~ +105°C

Order Information:

L-KLS1-MA-2.54-XX-R

L: RoHS

IDC connectors

2.54mm Pitch



XX-No. of:

02~24pin


Color: R=Red=22AWG

G=Green=28AWG W=White=24AWG

BL=Blue=26AWG BK=Black=18~26AWG

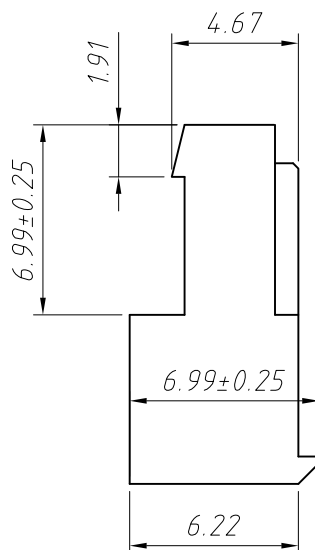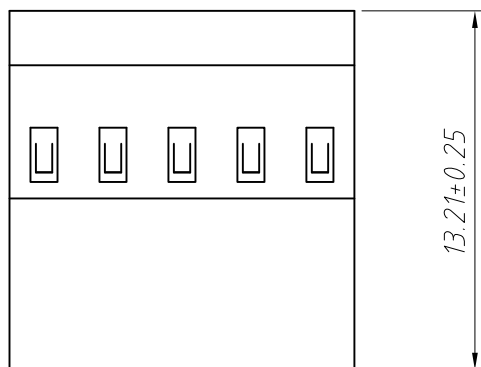



ANGLE TOLERANCE	PROJECTION		Description:	
±3°			2.54mm AMP IDC Connector	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-MA-2.54-XX-R
x.x ±0.30	SHEET SIZE	A4	NingBo KLS ELECTRONIC CO.,LTD.	
x.xx ±0.20	Draw:	Daniel		
x.xxx ±0.10	Check:	Daniel		
			2018-07-10	
			2018-07-10	

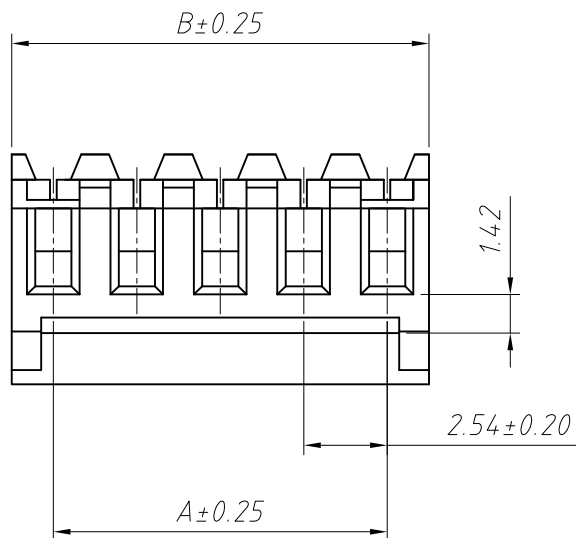

Pin	Dimension mm		Pin	Dimension mm	
	A	B		A	B
02	2.54	5.08	14	33.02	35.56
03	5.08	7.62	15	35.56	38.10
04	7.62	10.16	16	38.10	40.64
05	10.16	12.70	17	40.64	43.18
06	12.70	15.24	18	43.18	45.72
07	15.24	17.78	19	45.72	48.26
08	17.78	20.32	20	48.26	50.80
09	20.32	22.86	21	50.80	53.34
10	22.86	25.40	22	53.34	55.88
11	25.40	27.91	23	55.88	58.42
12	27.94	30.48	24	58.42	60.96
13	30.48	33.02			

Material:
Housing: PA66 UL94V-2
Contacts: Phosphor bronze
Plating: Tin 50u" over 100u" nickel

Electrical Specification:
Rated Voltage: 250V AC/DC
Rated Current: 3A
Contact Resistance: 20mΩ max
Insulation Resistance: 1000MΩ min
Withstand voltage: 1500V AC/MIN
Temperature range for usage: -40°C~+105°C

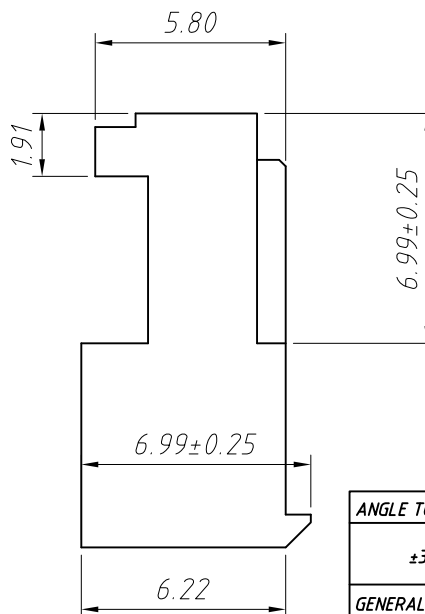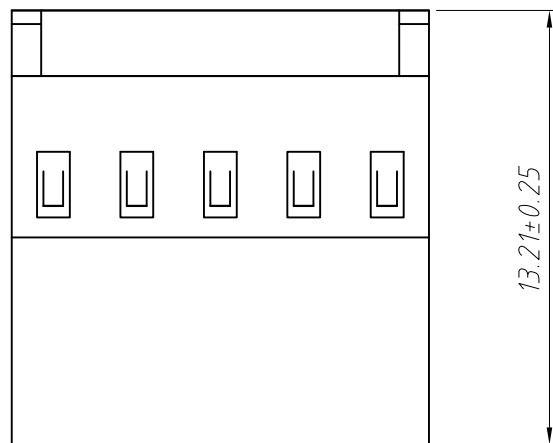


Order Information:
L-KLS1-MB-2.54-XX-R
L: RoHS
IDC connectors
2.54mm Pitch
XX-No. of:
02~24pin
Color: R=Red=22AWG
G=Green=28AWG W=White=24AWG
BL=Blue=26AWG BK=Black=18~26AWG

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				2.54mm AMP IDC Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-MB-2.54-XX-R
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Daniel	2018-07-10	
x.xxx	±0.10	Check:	Daniel	2018-07-10	





NingBo KLS ELECTRONIC CO.,LTD.

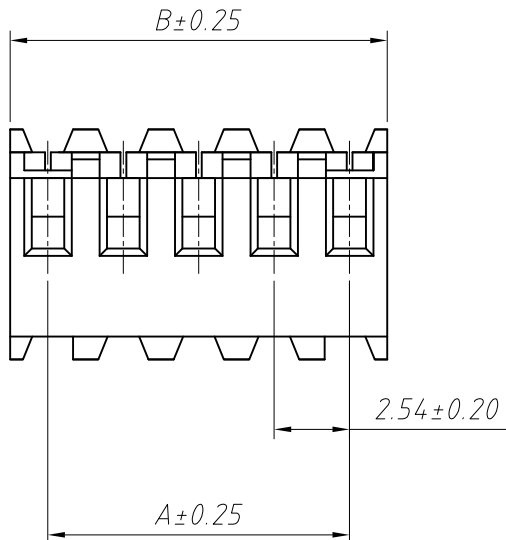

Pin	Dimension mm		Pin	Dimension mm	
	A	B		A	B
02	2.54	5.08	14	33.02	35.56
03	5.08	7.62	15	35.56	38.10
04	7.62	10.16	16	38.10	40.64
05	10.16	12.70	17	40.64	43.18
06	12.70	15.24	18	43.18	45.72
07	15.24	17.78	19	45.72	48.26
08	17.78	20.32	20	48.26	50.80
09	20.32	22.86	21	50.80	53.34
10	22.86	25.40	22	53.34	55.88
11	25.40	27.91	23	55.88	58.42
12	27.94	30.48	24	58.42	60.96
13	30.48	33.02			

Material:
Housing: PA66 UL94V-2
Contacts: Phosphor bronze
Plating: Tin 50u" over 100u" nickel


Electrical Specification:
Rated Voltage: 250V AC/DC
Rated Current: 3A
Contact Resistance: 20mΩ max
Insulation Resistance: 1000MΩ min
Withstand voltage: 1500V AC/MIN
Temperature range for usage : -40°C ~ +105°C

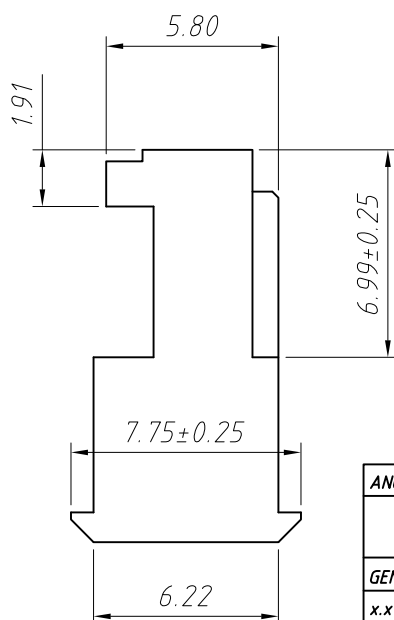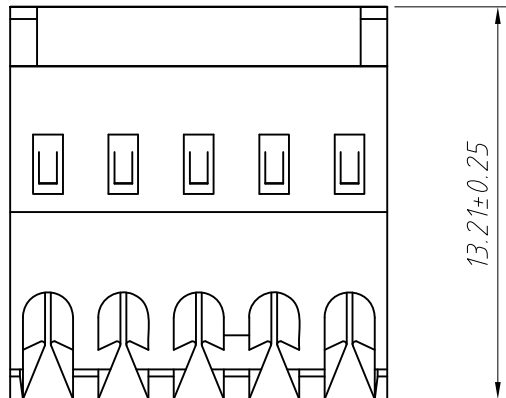

Order Information:
L-KLS1-MR-2.54-XX-R

L: RoHS
IDC connectors
2.54mm Pitch
XX-No.of:
02~24pin
Color: R=Red=22AWG
G=Green=28AWG W=White=24AWG
BL=Blue=26AWG BK=Black=18~26AWG

ANGLE TOLERANCE	PROJECTION		Description:	
±3°			2.54mm AMP IDC Connector	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-MR-2.54-XX-R
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Daniel	2018-07-10	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx ±0.10	Check:	Daniel	2018-07-10	

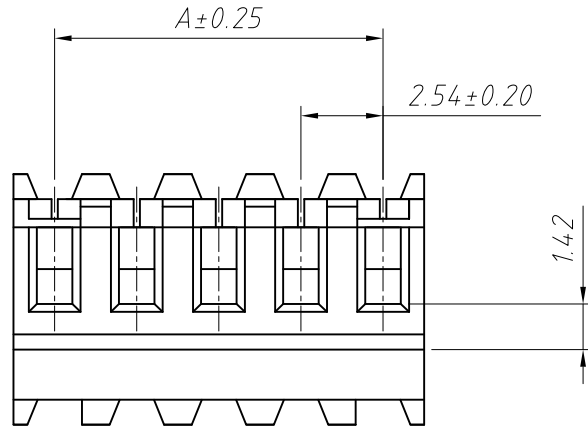

Pin	Dimension mm		Pin	Dimension mm	
	A	B		A	B
02	2.54	5.08	14	33.02	35.56
03	5.08	7.62	15	35.56	38.10
04	7.62	10.16	16	38.10	40.64
05	10.16	12.70	17	40.64	43.18
06	12.70	15.24	18	43.18	45.72
07	15.24	17.78	19	45.72	48.26
08	17.78	20.32	20	48.26	50.80
09	20.32	22.86	21	50.80	53.34
10	22.86	25.40	22	53.34	55.88
11	25.40	27.91	23	55.88	58.42
12	27.94	30.48	24	58.42	60.96
13	30.48	33.02			

Material:

Housing: PA66 UL 94V-2

Contacts: Phosphor bronze

Plating: Tin 50u" over 100u" nickel

Electrical Specification:

Rated Voltage: 250V AC/DC



Rated Current: 3A

Contact Resistance: 20mΩ max

Insulation Resistance: 1000MΩ min

Withstand voltage: 1500V AC/MIN

Temperature range for usage : -40°C ~ +105°C

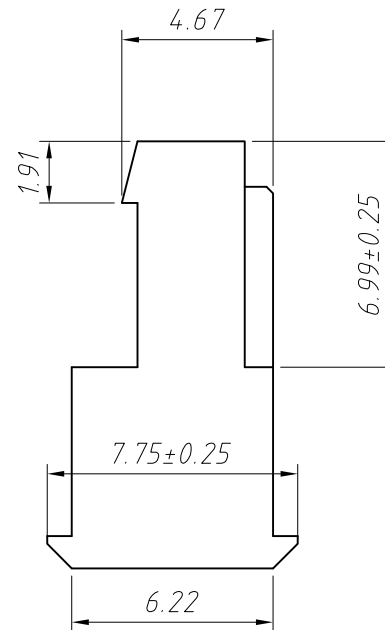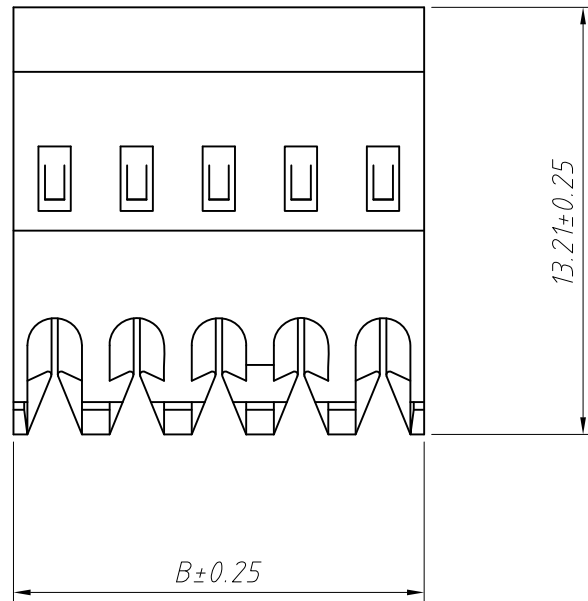

Order Information:

L-KLS1-MT-2.54-XX-R

L: RoHS

IDC connectors

2.54mm Pitch

XX-No. of:

02~24pin

Color: R=Red=22AWG

G=Green=28AWG

BL=Blue=26AWG

BK=Black=18~26AWG

W=White=24AWG

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^\circ$				2.54mm AMP IDC Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-MT-2.54-XX-R
x.x	± 0.30	SHEET SIZE	A4		
x.xx	± 0.20	Draw:	Daniel	2018-07-10	
x.xxx	± 0.10	Check:	Daniel	2018-07-10	



NingBo KLS ELECTRONIC CO.,LTD.

1
RoHS Compliance

2

3

4

5

6

7

8

A

A

B

B

C

C

D

D

E

E

F


F

G

G

H

H

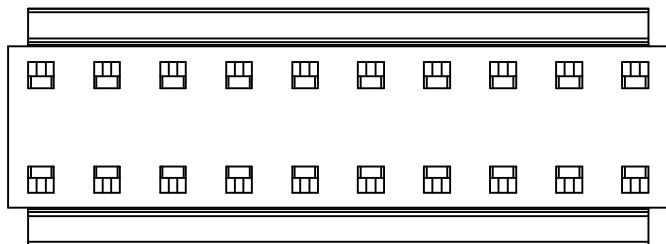

Pin	Dimension mm	Pin	Dimension mm
	A		A
02	5.08	14	35.56
03	7.62	15	38.10
04	10.16	16	40.64
05	12.70	17	43.18
06	15.24	18	45.72
07	17.78	19	48.26
08	20.32	20	50.80
09	22.86	21	53.34
10	25.40	22	55.88
11	27.91	23	58.42
12	30.48	24	60.96
13	33.02		

Material:

Housing: Nylon66, UL 94V-0

Color: White

Electrical Specification:

Rated Voltage: 250V AC/DC

Rated Current: 3A

Contact Resistance: 20mΩ max

Insulation Resistance: 1000MΩ min

Withstand voltage: 1500V AC/MIN

Temperature range for usage : -40°C~+105°C

Order Information:

L-KLS1-MT-2.54-H1-XX-W

L: RoHS



IDC connectors

2.54mm Pitch

Type: H1 Housing

XX-No. of 02~24pin

Color: W=White

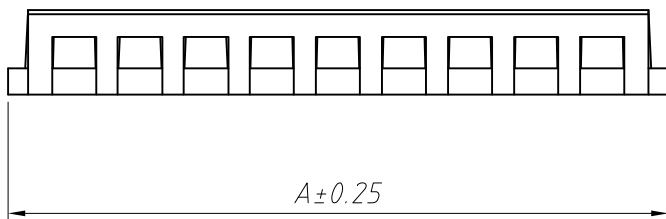

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				2.54mm AMP IDC Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-MT-2.54-H1-XX-W
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Daniel	2018-07-10	
x.xxx	±0.10	Check:	Daniel	2018-07-10	



NingBo KLS ELECTRONIC CO.,LTD.

1
RoHS Compliance

2

3

4

5

6

7

8

A

B

C


D

E

F

G

H

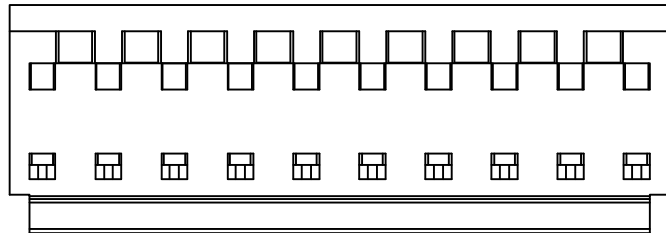

Pin	Dimension mm	Pin	Dimension mm
	A		A
02	5.08	14	35.56
03	7.62	15	38.10
04	10.16	16	40.64
05	12.70	17	43.18
06	15.24	18	45.72
07	17.78	19	48.26
08	20.32	20	50.80
09	22.86	21	53.34
10	25.40	22	55.88
11	27.91	23	58.42
12	30.48	24	60.96
13	33.02		

Material:

Housing: Nylon66, UL 94V-0

Color: White

Electrical Specification:

Rated Voltage: 250V AC/DC



Rated Current: 3A

Contact Resistance: 20mΩ max

Insulation Resistance: 1000MΩ min

Withstand voltage: 1500V AC/MIN

Temperature range for usage : -40°C~+105°C

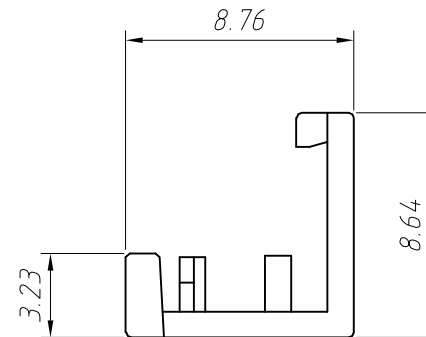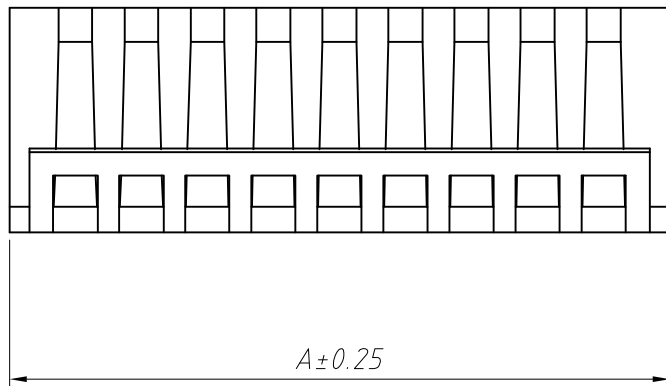

Order Information:

L-KLS1-MT-2.54-H2-XX-W

L: RoHS

IDC connectors

2.54mm Pitch

Type: H2 Housing


XX-No. of 02~24pin

Color: W=White

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				2.54mm AMP IDC Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-MT-2.54-H2-XX-W
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Daniel	2018-07-10	
x.xxx	±0.10	Check:	Daniel	2018-07-10	



NingBo KLS ELECTRONIC CO.,LTD.

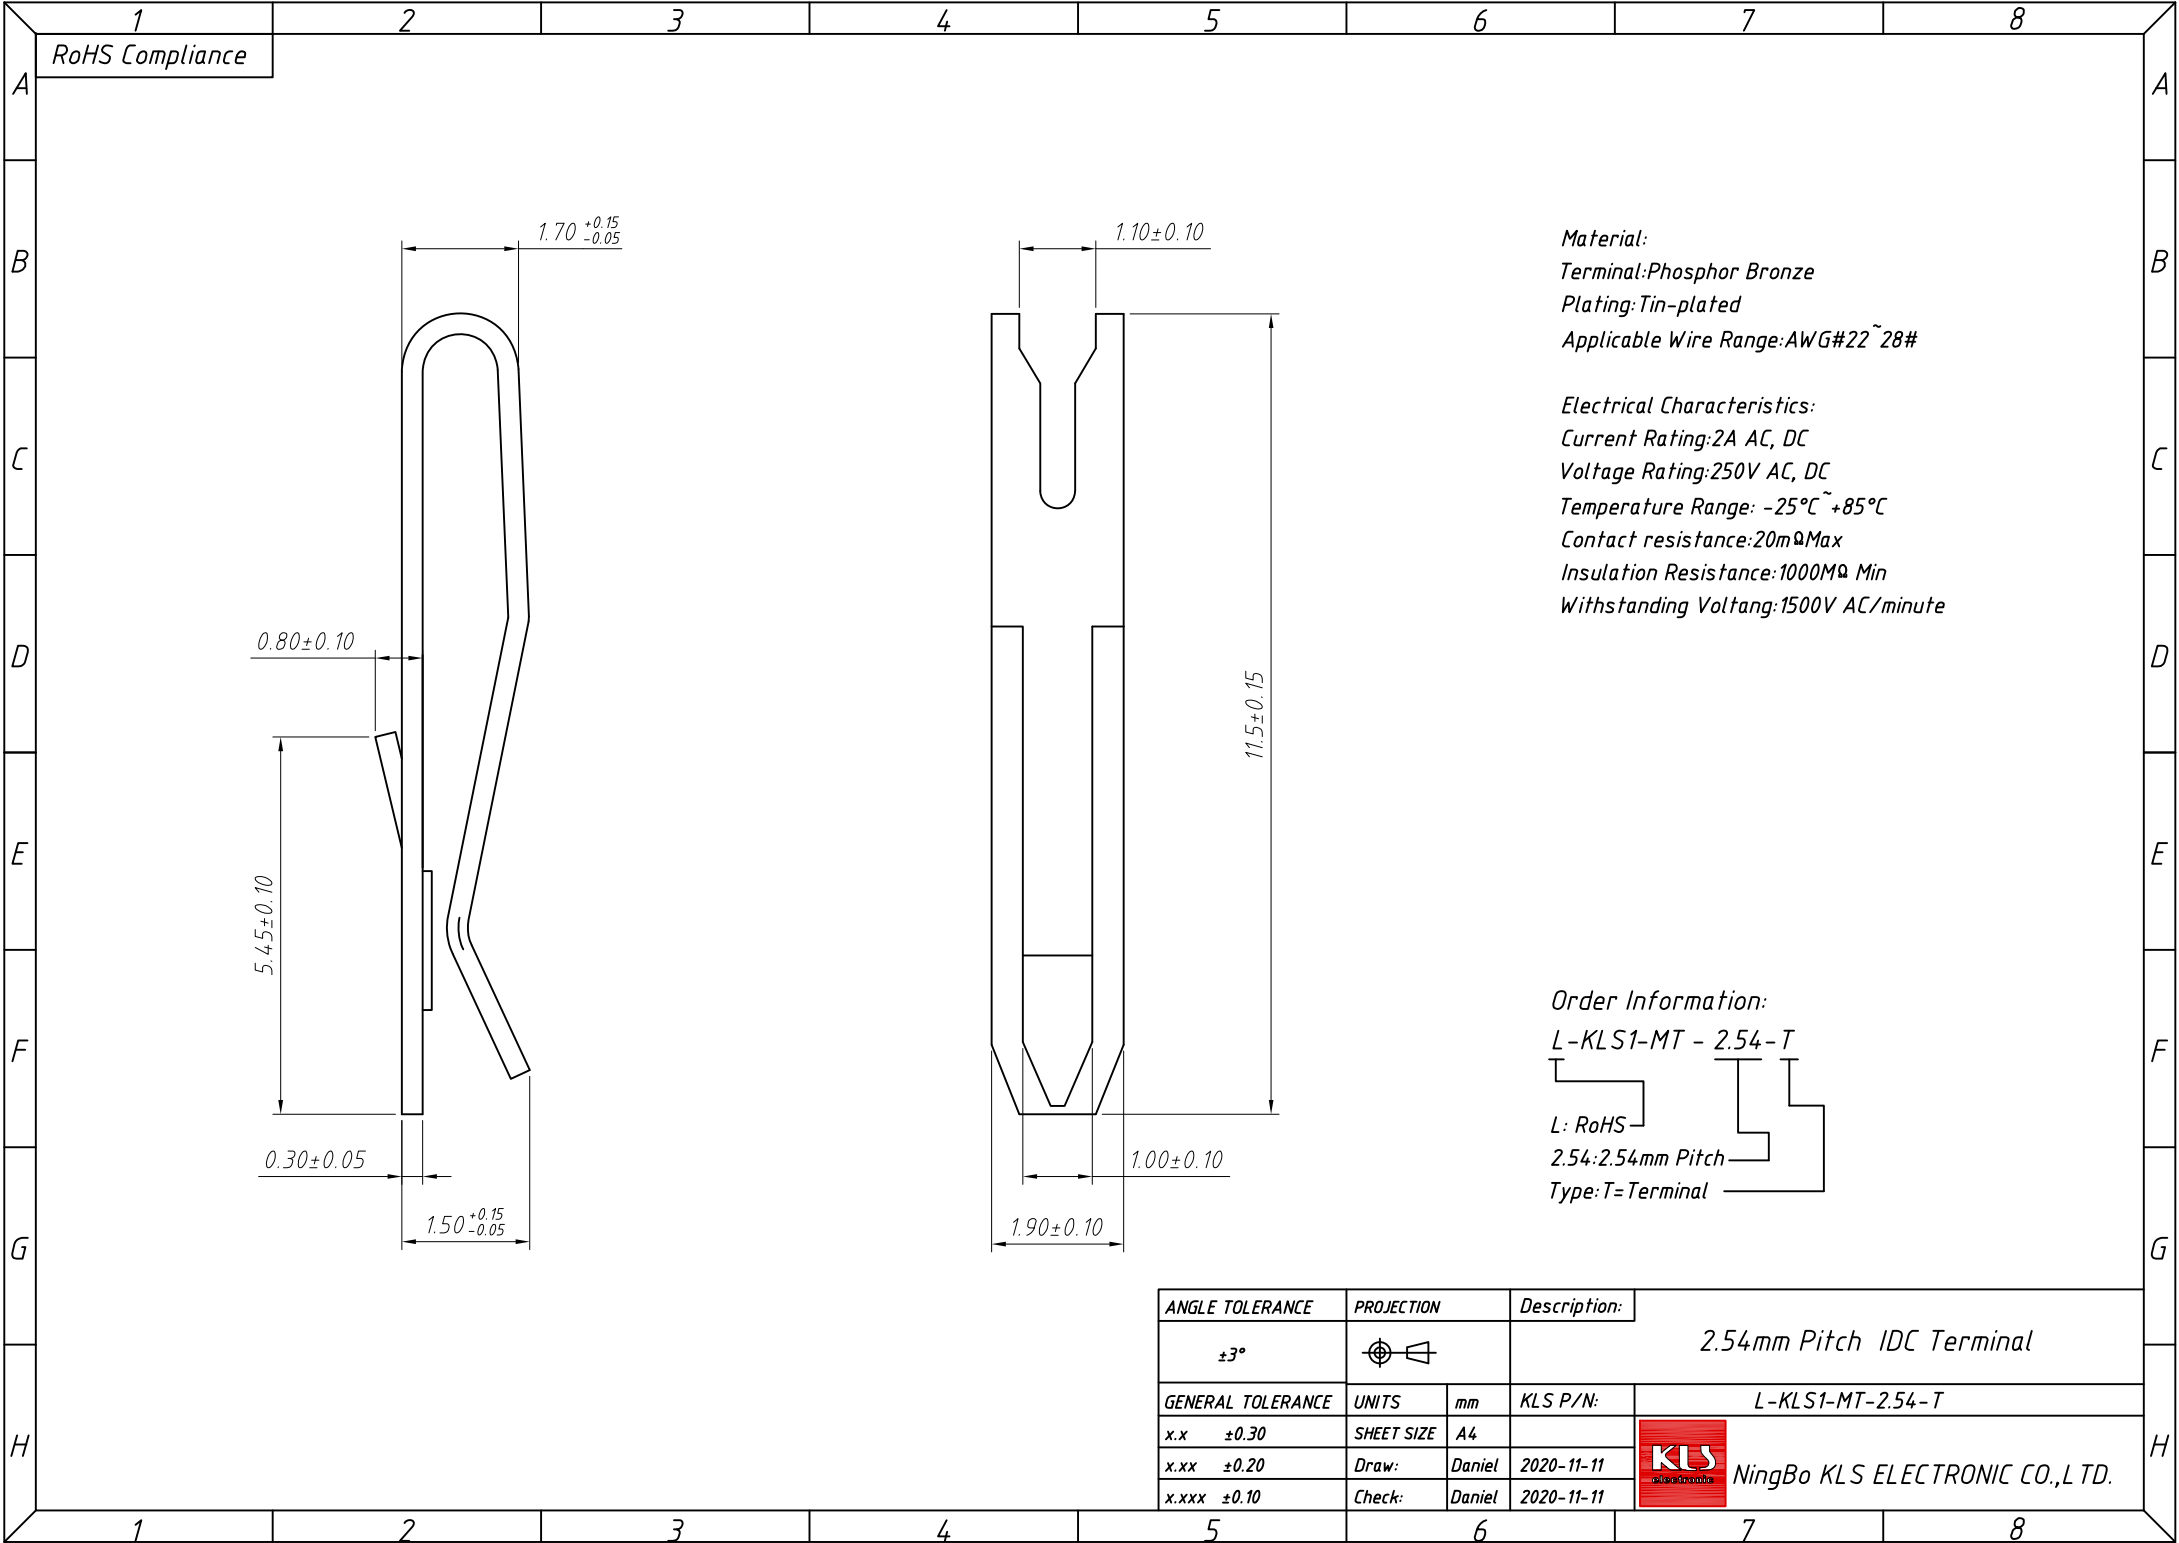

1
RoHS Compliance

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

A

B

C

D

E

F

G

H

Material:
Terminal:Phosphor Bronze
Plating: Tin-plated
Applicable Wire Range:AWG#22~28#

Electrical Characteristics:
Current Rating:2A AC, DC
Voltage Rating:250V AC, DC
Temperature Range: -25℃~+85℃
Contact resistance:20mΩMax
Insulation Resistance:1000MΩ Min
Withstanding Voltang:1500V AC/minute

Order Information:
L-KLS1-MT - 2.54-T

L: RoHS
2.54:2.54mm Pitch
Type:T=Terminal

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				2.54mm Pitch IDC Terminal	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-MT-2.54-T
x.x	±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L TD.
x.xx	±0.20	Draw:	Daniel	2020-11-11	
x.xxx	±0.10	Check:	Daniel	2020-11-11	

1
RoHS Compliance

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

A

B

C



D

E

F

G

H

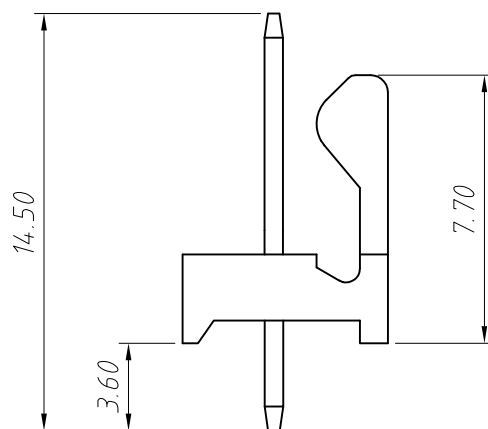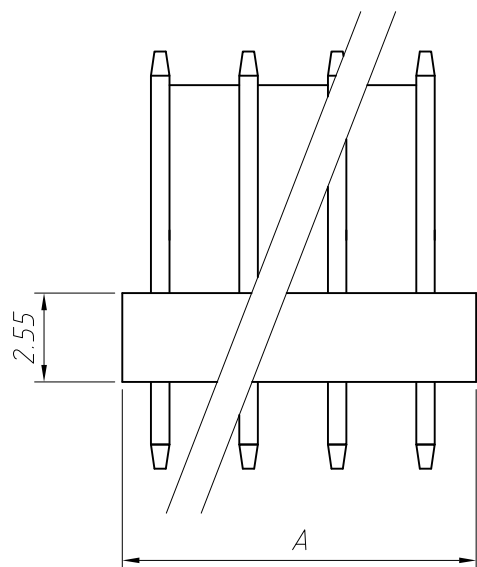

Pin	Dimension mm	
	B	A
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.91
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64

Material:

Housing:Polyester UL94V-0

Contacts:Brass,Tin plated

Electrical Specification:

Rated Voltage:250V AC/DC

Rated Current:4A



Contact Resistance:3.0mΩ max

Insulation Resistance:5000MΩ min


Withstand voltage:2200V AC/MIN

Temperature range for usage : -40℃~+105℃

Solder Temperature :245℃±0.5℃

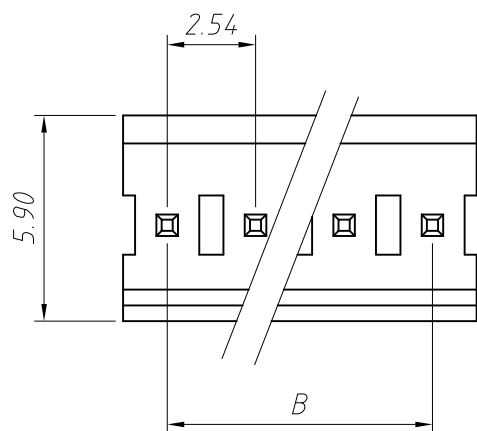

PCB LAYOUT



Order Information:

L-KLS1-MT-2.54-S1-XX-W

L: RoHS

IDC connectors

2.54mm Pitch

Type:S1 Straight Pin



XX-No.of 02~16 pin

Color: W=White


ANGLE TOLERANCE		PROJECTION		Description:	
±3°				2.54mm AMP IDC Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-MT-2.54-S1-XX-W
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Daniel	2018-07-10	
x.xxx	±0.10	Check:	Daniel	2018-07-10	



NingBo KLS ELECTRONIC CO.,LTD.


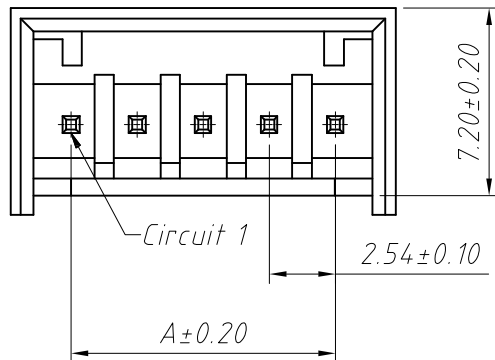


PCB LAYOUT

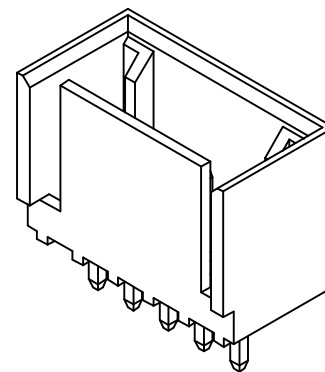

Material:
Housing:PBT UL94V-0
Contacts:Brass,Tin plated

Electrical Specification:
Rated Current:3A
Rated Voltage:250V AC/DC
Contact Resistance:20mΩ max
Insulation Resistance:1000MΩ min
Withstand voltage:1500V AC/MIN
Temperature range for usage:-40°C~+105°C

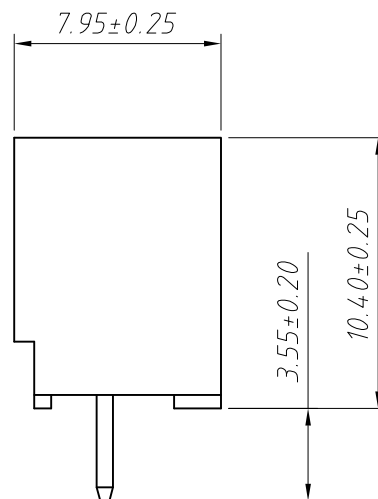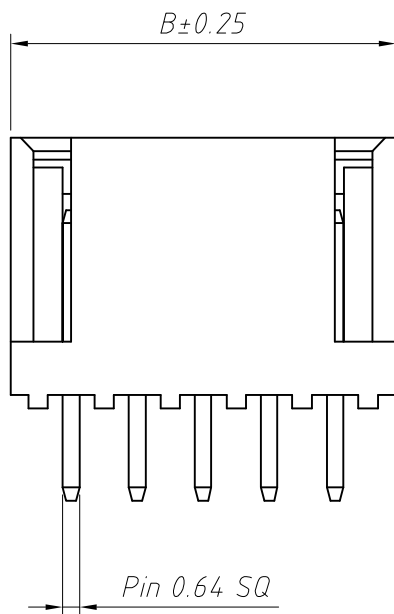

Pin	Dimension mm		Pin	Dimension mm	
	A	B		A	B
02	2.54	7.21	14	33.02	37.69
03	5.08	9.75	15	35.56	40.23
04	7.62	12.29	16	38.10	42.77
05	10.16	14.83	17	40.64	45.31
06	12.70	17.37	18	43.18	47.85
07	15.24	19.91	19	45.72	50.39
08	17.78	22.45	20	48.26	52.93
09	20.32	24.99	21	50.80	55.47
10	22.86	27.53	22	53.34	58.01
11	25.40	30.07	23	55.88	60.55
12	27.94	32.61	24	58.42	63.09
13	30.48	35.15			

Order Information:
L-KLS1-MT-2.54-S2-XX-BK
L: RoHS
IDC connectors
2.54mm Pitch
Type:S2 Straight Pin
XX-No.of 02~24 pin
Color:BK=Black

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				2.54mm AMP IDC Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x ±0.30		SHEET SIZE		A4	
x.xx ±0.20		Draw:		Daniel 2018-07-10	
x.xxx ±0.10		Check:		Daniel 2018-07-10	



NingBo KLS ELECTRONIC CO.,LTD.

1
RoHS Compliance

2

3

4

5

6

7

8

A

B

C




D

E

F



G

H

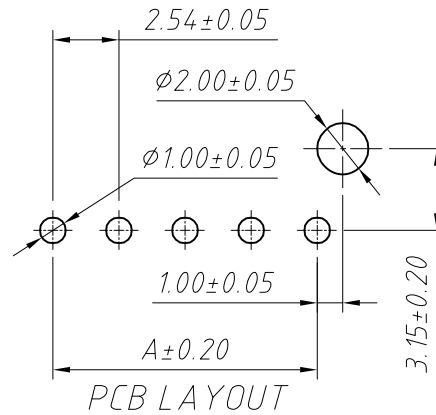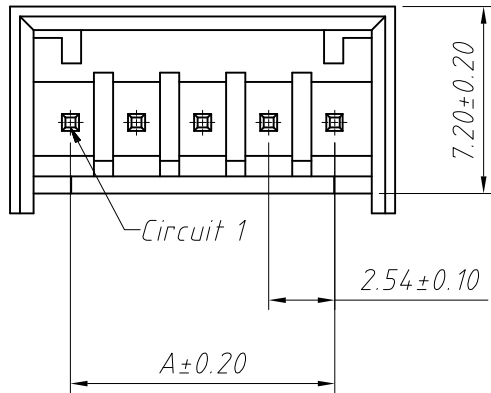

Material:
Housing:PBT UL94V-0
Contacts:Brass,Tin plated

Electrical Specification:
Rated Current:3A
Rated Voltage:250V AC/DC
Contact Resistance:20m Ω max
Insulation Resistance:1000M Ω min
Withstand voltage:1500V AC/MIN
Temperature range for usage:-40°C ~ +105°C

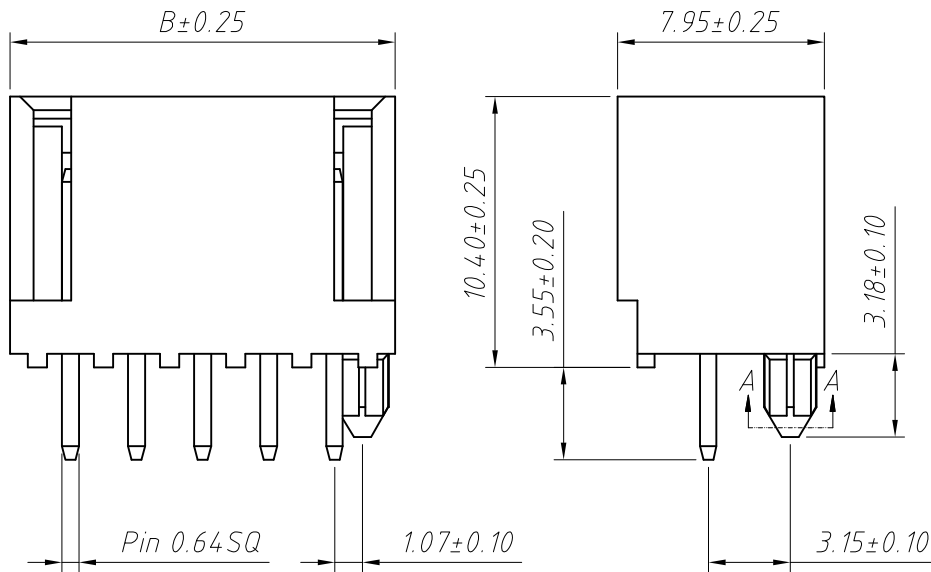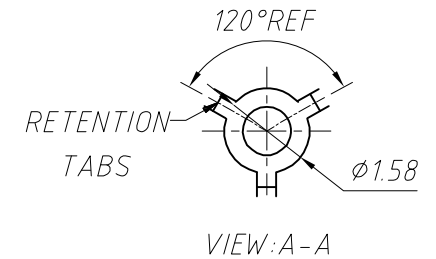


Pin	Dimension mm		Pin	Dimension mm	
	A	B		A	B
02	2.54	7.21	14	33.02	37.69
03	5.08	9.75	15	35.56	40.23
04	7.62	12.29	16	38.10	42.77
05	10.16	14.83	17	40.64	45.31
06	12.70	17.37	18	43.18	47.85
07	15.24	19.91	19	45.72	50.39
08	17.78	22.45	20	48.26	52.93
09	20.32	24.99	21	50.80	55.47
10	22.86	27.53	22	53.34	58.01
11	25.40	30.07	23	55.88	60.55
12	27.94	32.61	24	58.42	63.09
13	30.48	35.15			

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^\circ$				2.54mm AMP IDC Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-MT-2.54-R3-XX-BK
x.x	± 0.30	SHEET SIZE	A4		
x.xx	± 0.20	Draw:	Daniel	2018-07-10	
x.xxx	± 0.10	Check:	Daniel	2018-07-10	

Order Information:
L-KLS1-MT-2.54-S3-XX-BK
L: RoHS
IDC connectors
2.54mm Pitch
Type:S2 Straight Pin
XX-No.of 02~24 pin
Color:BK=Black



NingBo KLS ELECTRONIC CO.,LTD.

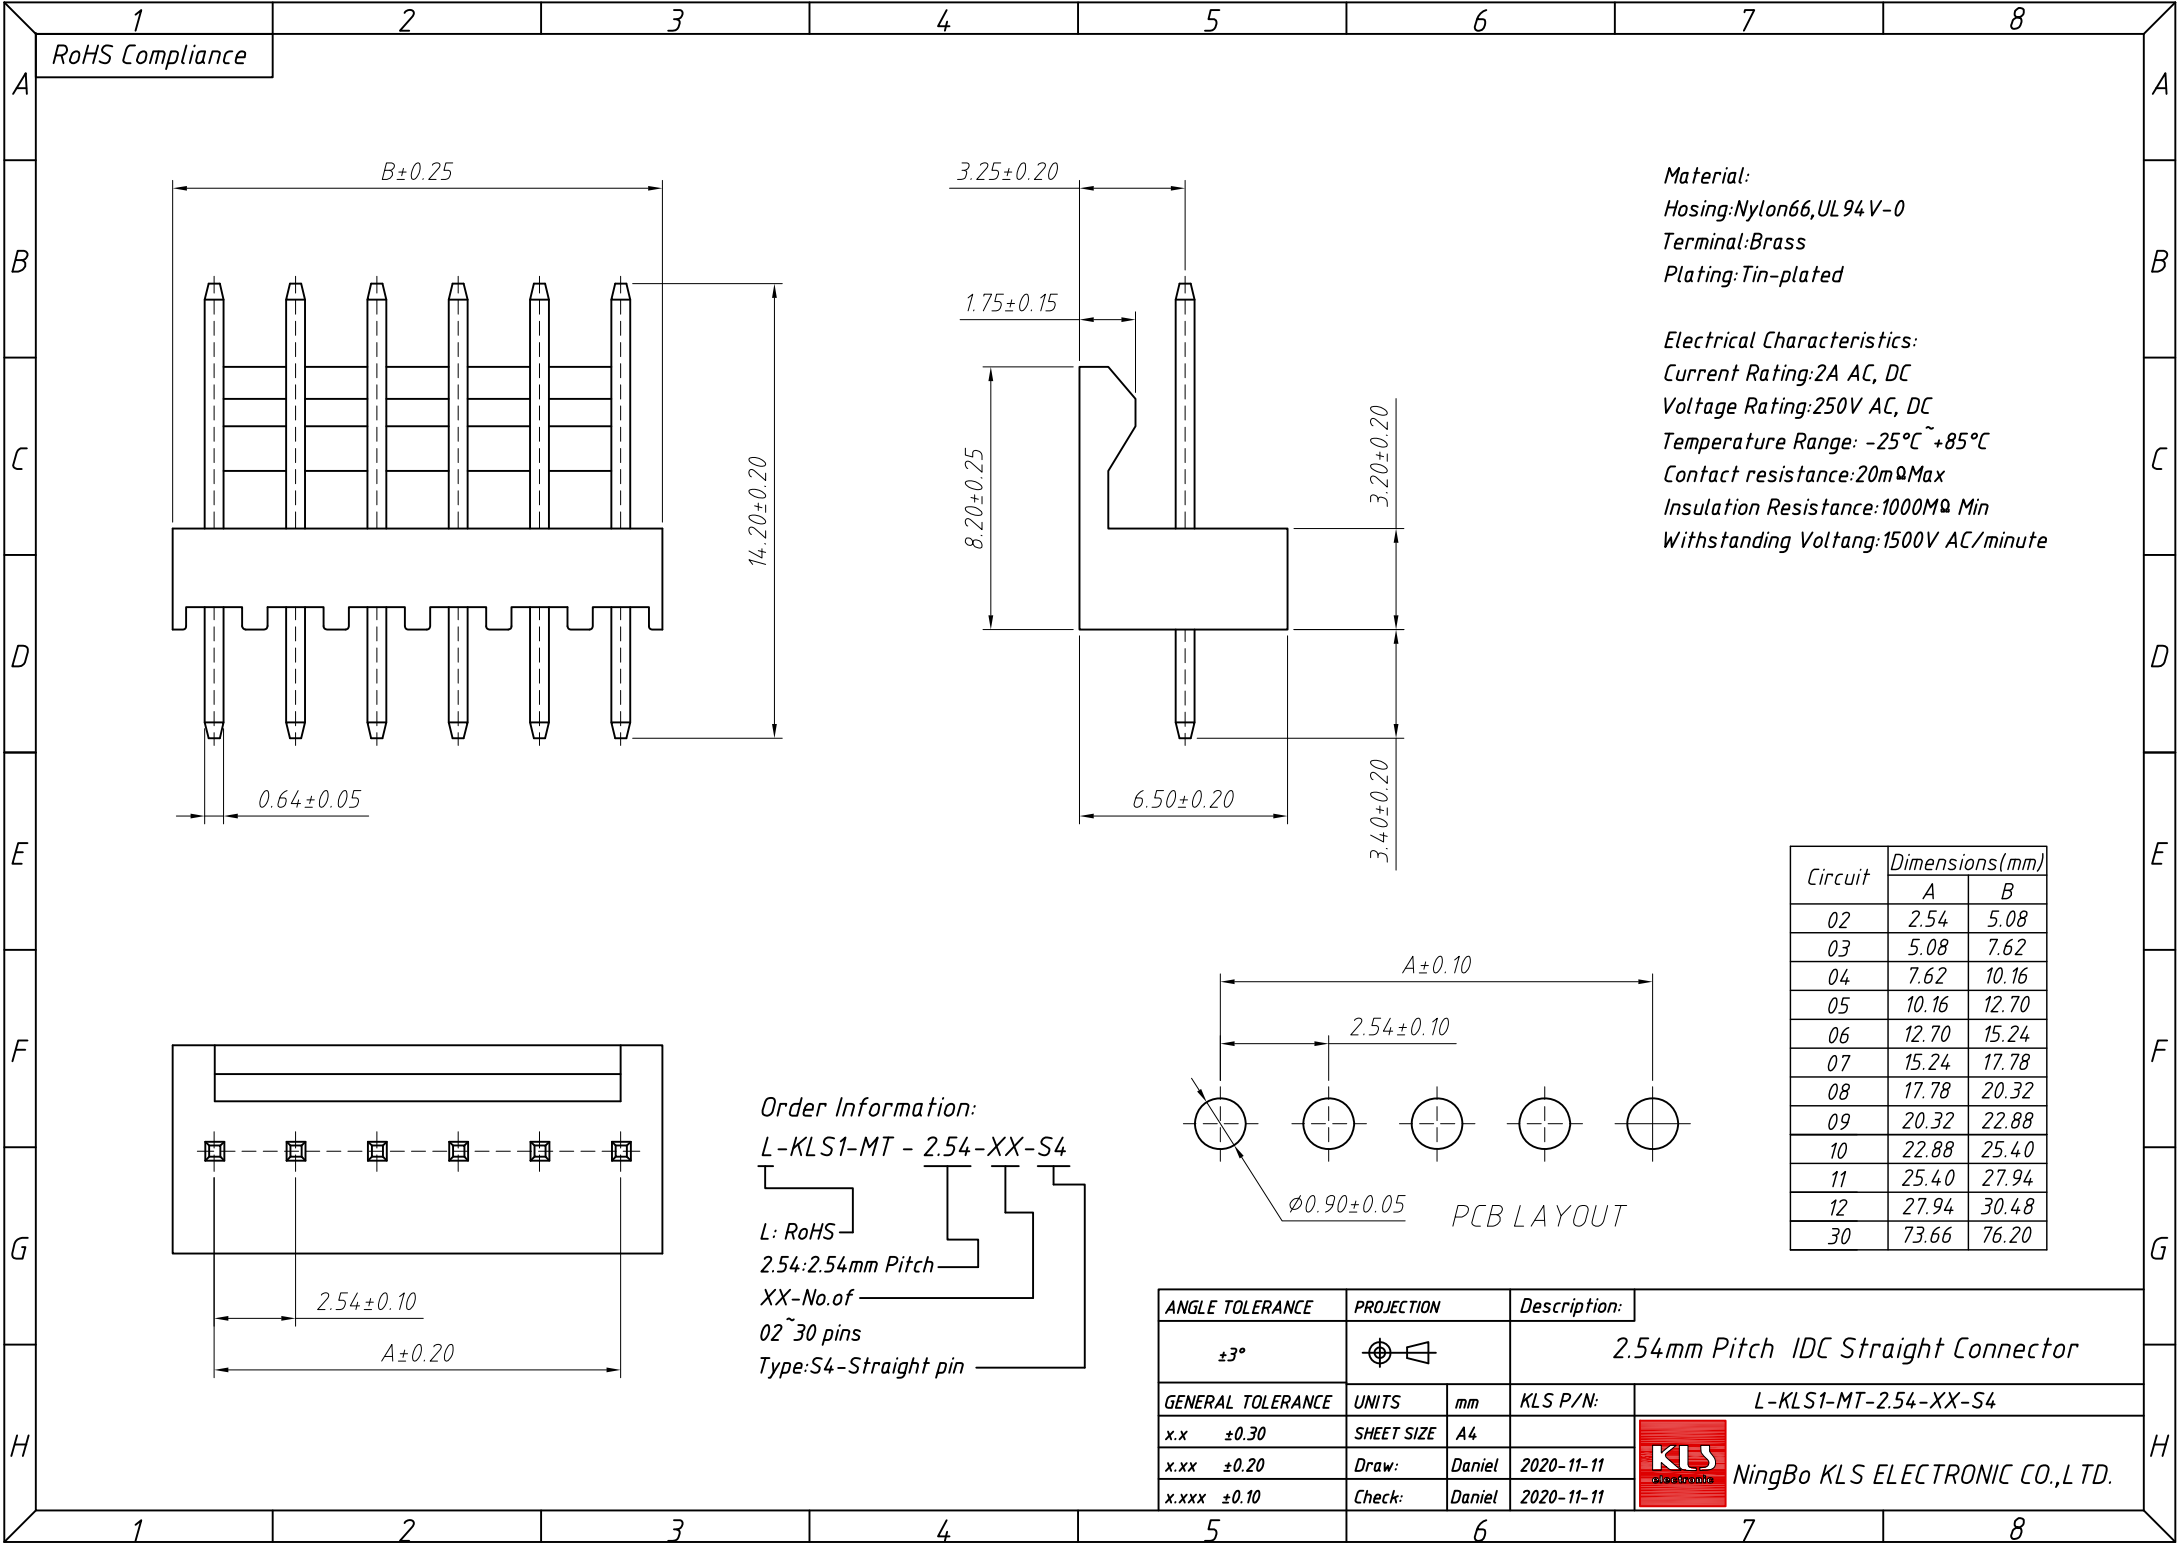

1
RoHS Compliance

2

3

4

5

6

7

8

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H

H


Material:
Hosing:Nylon66,UL94 V-0
Terminal:Brass
Plating:Tin-plated

Electrical Characteristics:
Current Rating:2A AC, DC
Voltage Rating:250V AC, DC
Temperature Range: -25°C ~+85°C
Contact resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstanding Voltang:1500V AC/minute



Circuit	Dimensions(mm)	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.88
10	22.88	25.40
11	25.40	27.94
12	27.94	30.48
30	73.66	76.20

Order Information:
L-KLS1-MT - 2.54-XX-S4

L: RoHS
2.54:2.54mm Pitch
XX-No. of
02 ~30 pins
Type:S4-Straight pin



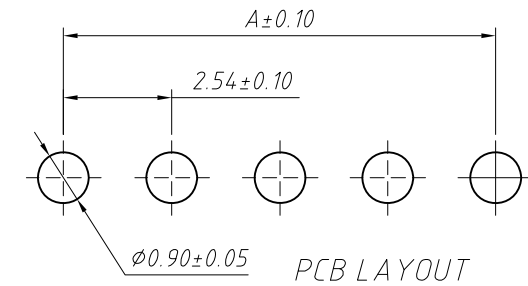


ANGLE TOLERANCE		PROJECTION		Description:	
±3°				2.54mm Pitch IDC Straight Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-MT-2.54-XX-S4
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Daniel	2020-11-11	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx	±0.10	Check:	Daniel	2020-11-11	

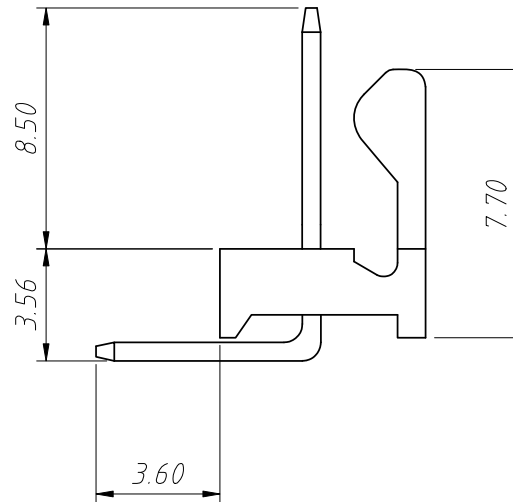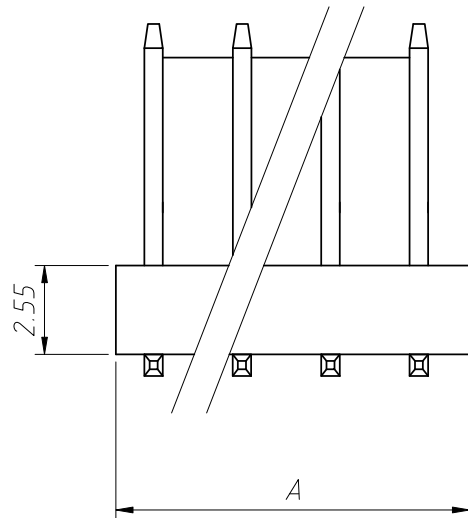

Material:
Housing:Polyester UL94V-0
Contacts:Brass,Tin plated

Electrical Specification:
Rated Voltage:250V AC/DC
Rated Current:4A
Contact Resistance:3.0mΩ max
Insulation Resistance:5000MΩ min
Withstand voltage:2200V AC/MIN
Temperature range for usage : -40℃~+105℃
Solder Temperature :245℃±0.5℃

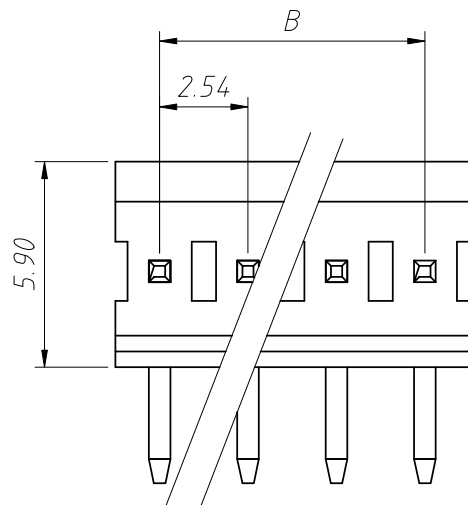

PCB LAYOUT

Pin	Dimension mm	
	B	A
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.91
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64

Order Information:
L-KLS1-MT-2.54-R1-XX-W

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				2.54mm AMP IDC Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-MT-2.54-R1-XX-W
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Daniel	2018-07-10	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx	±0.10	Check:	Daniel	2018-07-10	

1
RoHS Compliance

2

3

4

5

6

7

8

A

B

C



D

E


F

G

H


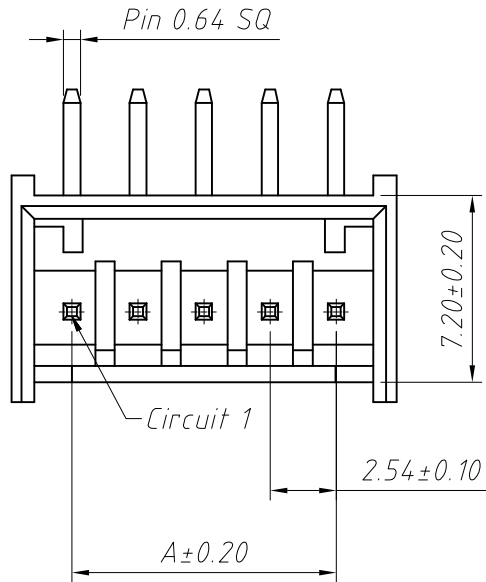


PCB LAYOUT

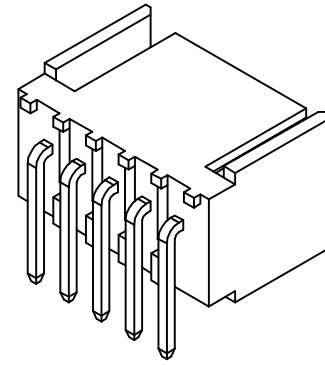

Material:
Housing:PBT UL94V-0
Contacts:Brass,Tin plated

Electrical Specification:
Rated Current:3A
Rated Voltage:250V AC/DC
Contact Resistance:20mΩ max
Insulation Resistance:1000MΩ min
Withstand voltage:1500V AC/MIN
Temperature range for usage:-40°C~+105°C

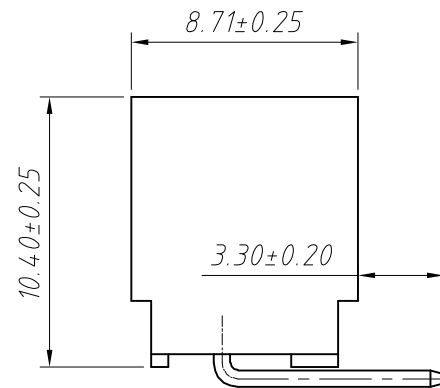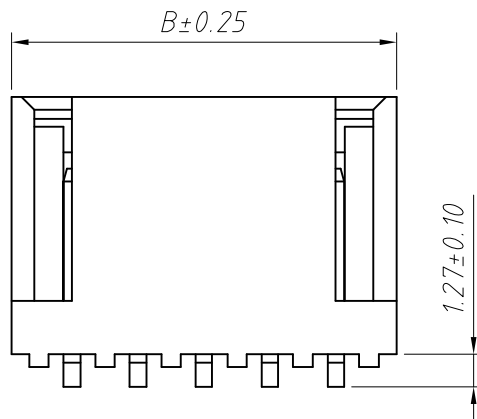

Pin	Dimension mm		Pin	Dimension mm	
	A	B		A	B
02	2.54	7.21	14	33.02	37.69
03	5.08	9.75	15	35.56	40.23
04	7.62	12.29	16	38.10	42.77
05	10.16	14.83	17	40.64	45.31
06	12.70	17.37	18	43.18	47.85
07	15.24	19.91	19	45.72	50.39
08	17.78	22.45	20	48.26	52.93
09	20.32	24.99	21	50.80	55.47
10	22.86	27.53	22	53.34	58.01
11	25.40	30.07	23	55.88	60.55
12	27.94	32.61	24	58.42	63.09
13	30.48	35.15			

Order Information:

L-KLS1-MT-2.54-R2-XX-BK

L: RoHS

IDC connectors

2.54mm Pitch

Type:R2 Right Angle




XX-No.of 02~24 pin

Color:BK=Black

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				2.54mm AMP IDC Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-MT-2.54-R2-XX-BK
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Daniel	2018-07-10	
x.xxx	±0.10	Check:	Daniel	2018-07-10	




NingBo KLS ELECTRONIC CO.,LTD.

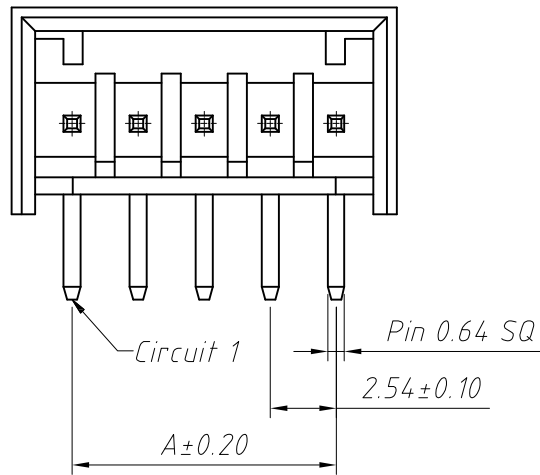

Material:
Housing:PBT UL94V-0
Contacts:Brass,Tin plated

Electrical Specification:
Rated Current:3A
Rated Voltage:250V AC/DC
Contact Resistance:20m Ω max
Insulation Resistance:1000M Ω min
Withstand voltage:1500V AC/MIN
Temperature range for usage:-40 $^{\circ}$ C ~ +105 $^{\circ}$ C

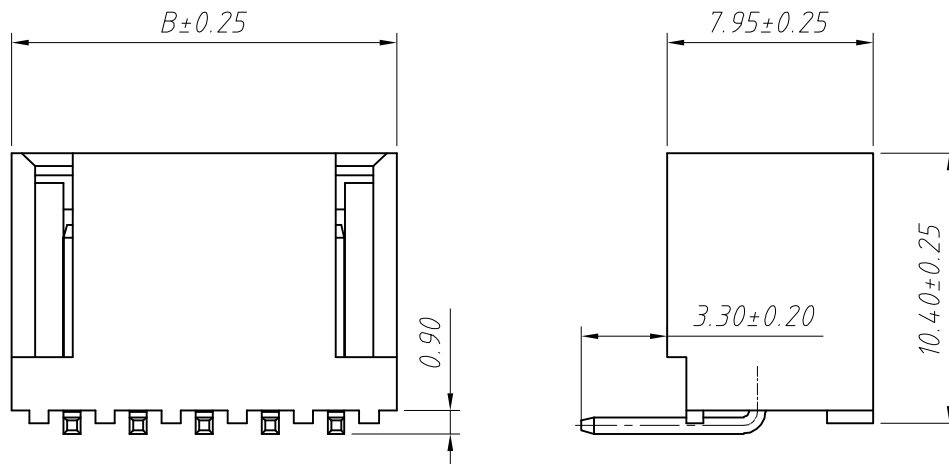

Pin	Dimension mm		Pin	Dimension mm	
	A	B		A	B
02	2.54	7.21	14	33.02	37.69
03	5.08	9.75	15	35.56	40.23
04	7.62	12.29	16	38.10	42.77
05	10.16	14.83	17	40.64	45.31
06	12.70	17.37	18	43.18	47.85
07	15.24	19.91	19	45.72	50.39
08	17.78	22.45	20	48.26	52.93
09	20.32	24.99	21	50.80	55.47
10	22.86	27.53	22	53.34	58.01
11	25.40	30.07	23	55.88	60.55
12	27.94	32.61	24	58.42	63.09
13	30.48	35.15			

Order Information:
L-KLS1-MT-2.54-R3-XX-BK
L: RoHS
IDC connectors
2.54mm Pitch
Type:R3 Right Angle
XX-No.of 02~24 pin
Color:BK=Black

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^{\circ}$				2.54mm AMP IDC Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-MT-2.54-R3-XX-BK
x.x		± 0.30		SHEET SIZE	A4
x.xx		± 0.20		Draw:	Daniel 2018-07-10
x.xxx		± 0.10		Check:	Daniel 2018-07-10




NingBo KLS ELECTRONIC CO.,LTD.

Material:
 Hosing:Nylon66,UL 94 V-0
 Terminal:Brass
 Plating:Tin-plated

Electrical Characteristics:
 Current Rating:2A AC, DC
 Voltage Rating:250V AC, DC
 Temperature Range: -25°C ~ +85°C
 Contact resistance:20mΩMax
 Insulation Resistance:1000MΩ Min
 Withstanding Voltang:1500V AC/minute

Circuit	Dimensions(mm)	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.88
10	22.88	25.40
11	25.40	27.94
12	27.94	30.48
30	73.66	76.20

Order Information:
 L-KLS1-MT - 2.54-XX-R4



L: RoHS
 2.54:2.54mm Pitch
 XX-No.of
 02~30 pins
 Type: R4-Right Angle Pin

PCB LAYOUT

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				2.54mm Pitch IDC Right Angle Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-MT-2.54-XX-R4
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Daniel	2020-11-11	 NingBo KLS ELECTRONIC CO.,L TD.
x.xxx	±0.10	Check:	Daniel	2020-11-11	