


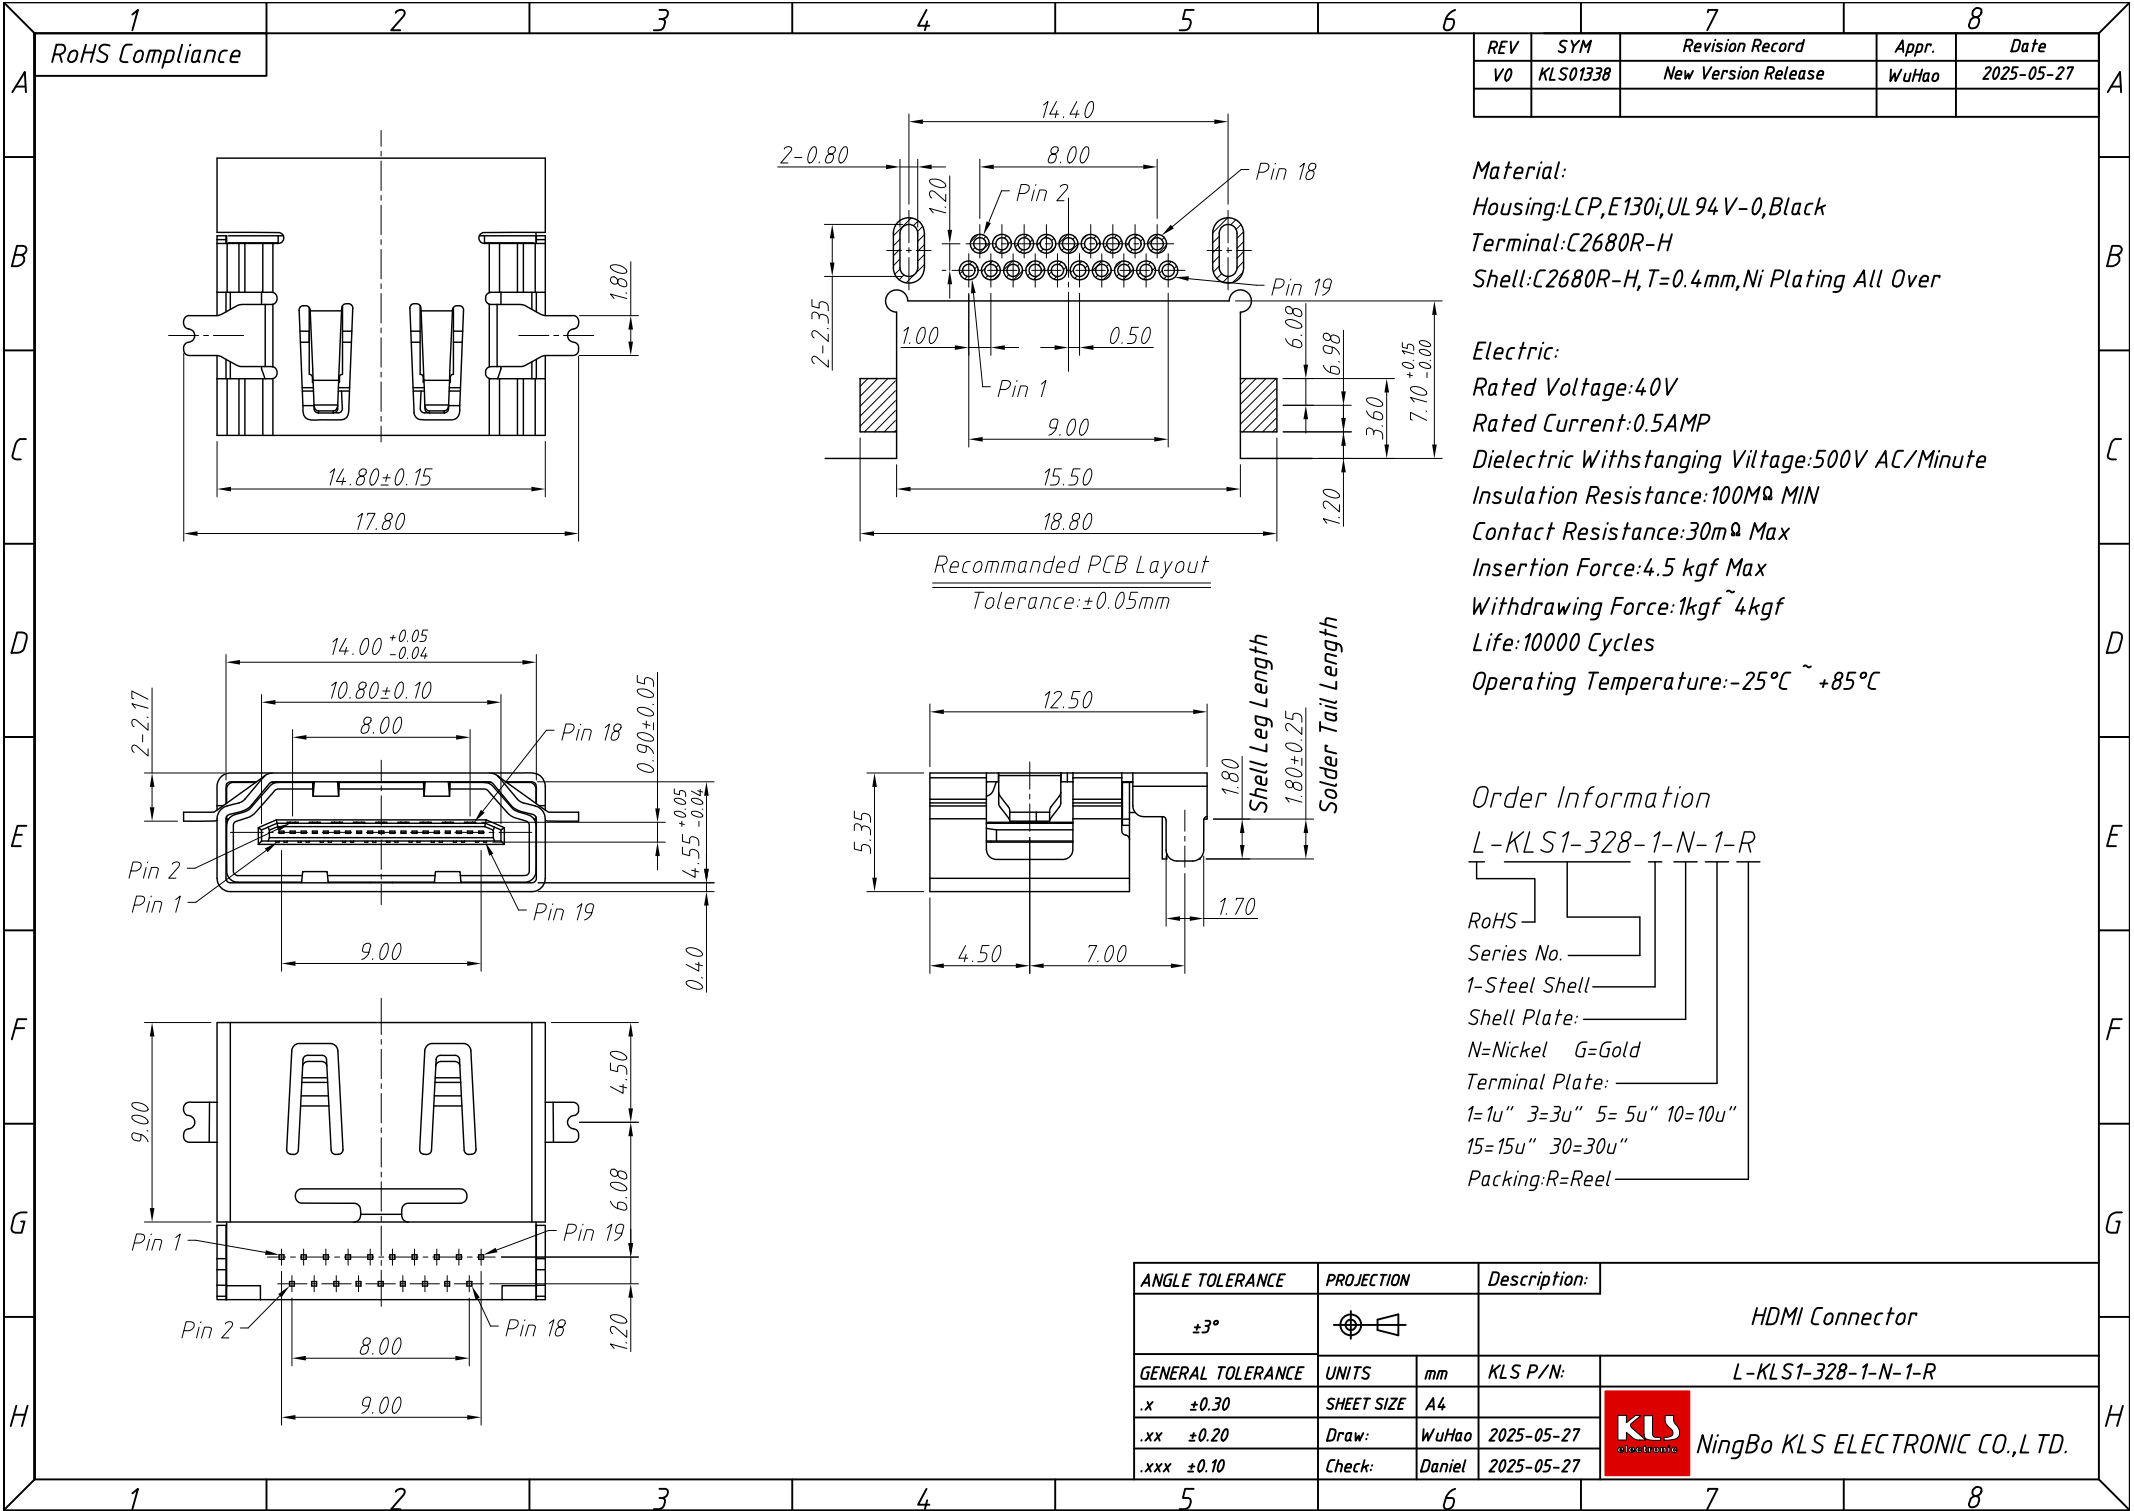

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01338	New Version Release	WuHao	2025-05-27

Material:
Housing:LCP,E130i,UL 94 V-0,Black
Terminal:C2680R-H
Shell:C2680R-H,T=0.4mm,Ni Plating All Over

Electric:
Rated Voltage:40V
Rated Current:0.5AMP
Dielectric Withstanging Viltage:500V AC/Minute
Insulation Resistance:100M Ω MIN
Contact Resistance:30m Ω Max
Insertion Force:4.5 kgf Max
Withdrawing Force:1kgf~4kgf
Life:10000 Cycles
Operating Temperature:-25 $^{\circ}$ C ~ +85 $^{\circ}$ C

Order Information

L-KLS1-328-1-N-1-R

RoHS-
Series No.-
1-Steel Shell-
Shell Plate:-
N=Nickel G=Gold
Terminal Plate:-
1=1u" 3=3u" 5= 5u" 10=10u"
15=15u" 30=30u"
Packing:R=Reel

ANGLE TOLERANCE	PROJECTION	Description:
$\pm 3^{\circ}$		HDMI Connector
GENERAL TOLERANCE	UNITS	mm
.x ± 0.30	SHEET SIZE	A4
.xx ± 0.20	Draw:	WuHao
.xxx ± 0.10	Check:	Daniel

NingBo KLS ELECTRONIC CO.,LTD.