


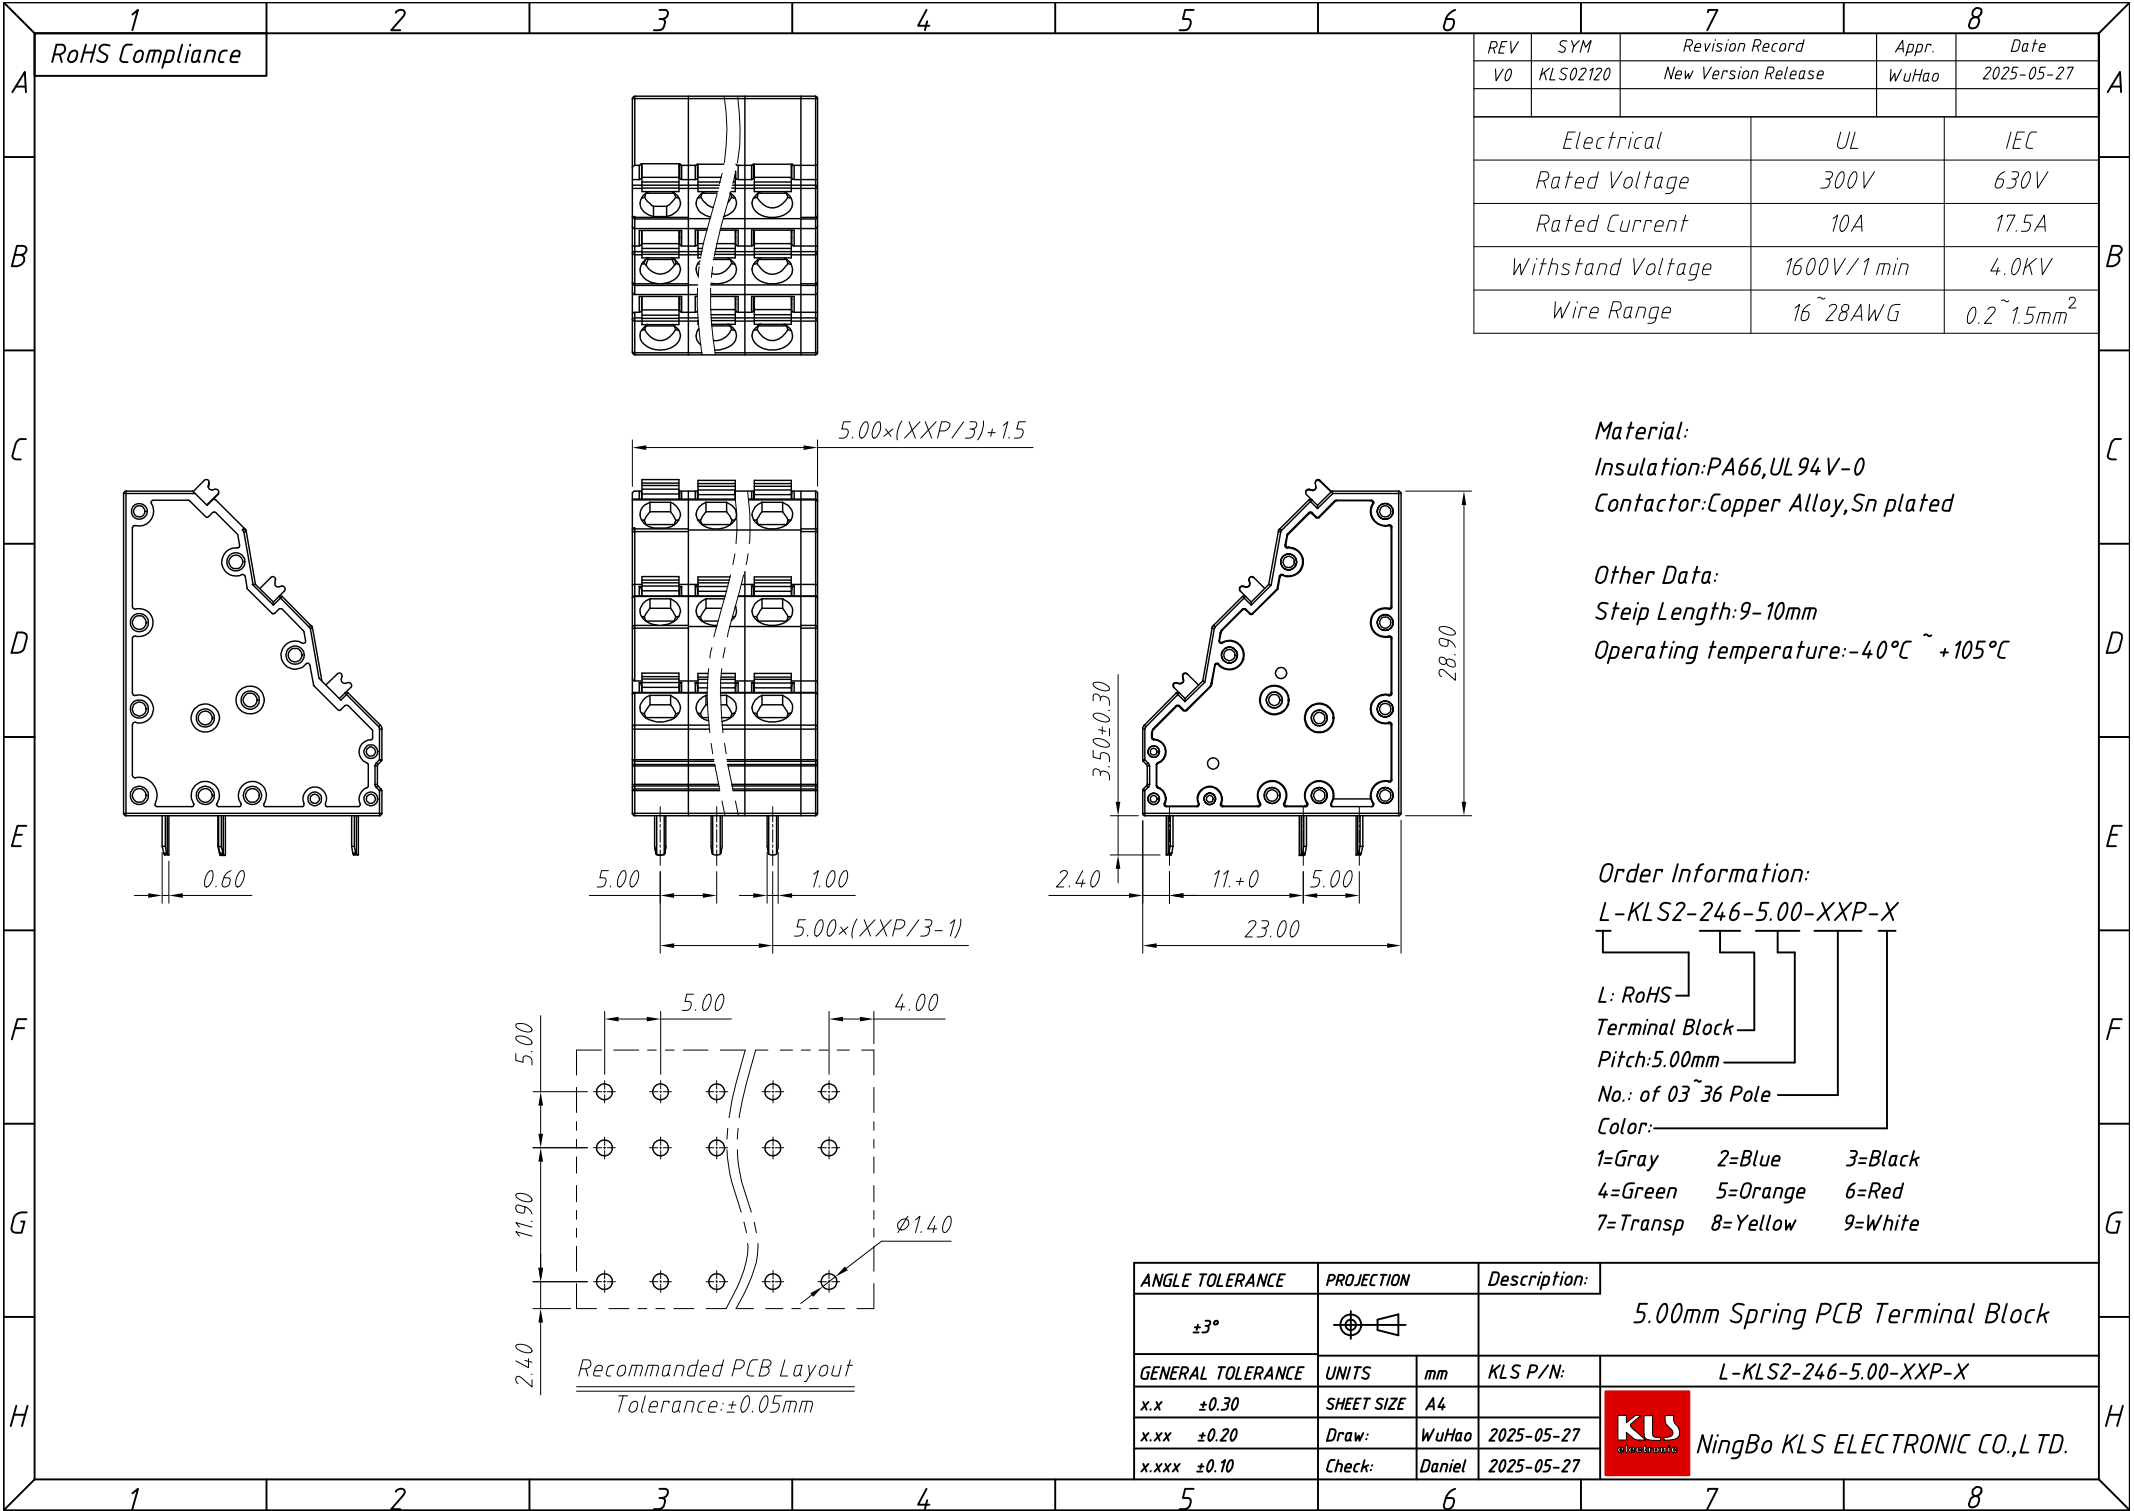

RoHS Compliance

REV		SYM	Revision Record		Appr.	Date
V0		KLS02120	New Version Release		WuHao	2025-05-27
Electrical			UL		IEC	
Rated Voltage			300V		630V	
Rated Current			10A		17.5A	
Withstand Voltage			1600V/1 min		4.0KV	
Wire Range			16~28AWG		0.2~1.5mm ²	

Material:
Insulation:PA66,UL 94 V-0
Contactor:Copper Alloy,Sn plated

Other Data:
Steip Length:9~10mm
Operating temperature:-40℃ ~ +105℃

Order Information:
L-KLS2-246-5.00-XXP-X

L: RoHS
Terminal Block
Pitch:5.00mm
No.: of 03~36 Pole
Color:

1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				5.00mm Spring PCB Terminal Block	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS2-246-5.00-XXP-X
x.x ±0.30		SHEET SIZE	A4		
x.xx ±0.20		Draw:	WuHao	2025-05-27	
x.xxx ±0.10		Check:	Daniel	2025-05-27	



NingBo KLS ELECTRONIC CO.,LTD.