


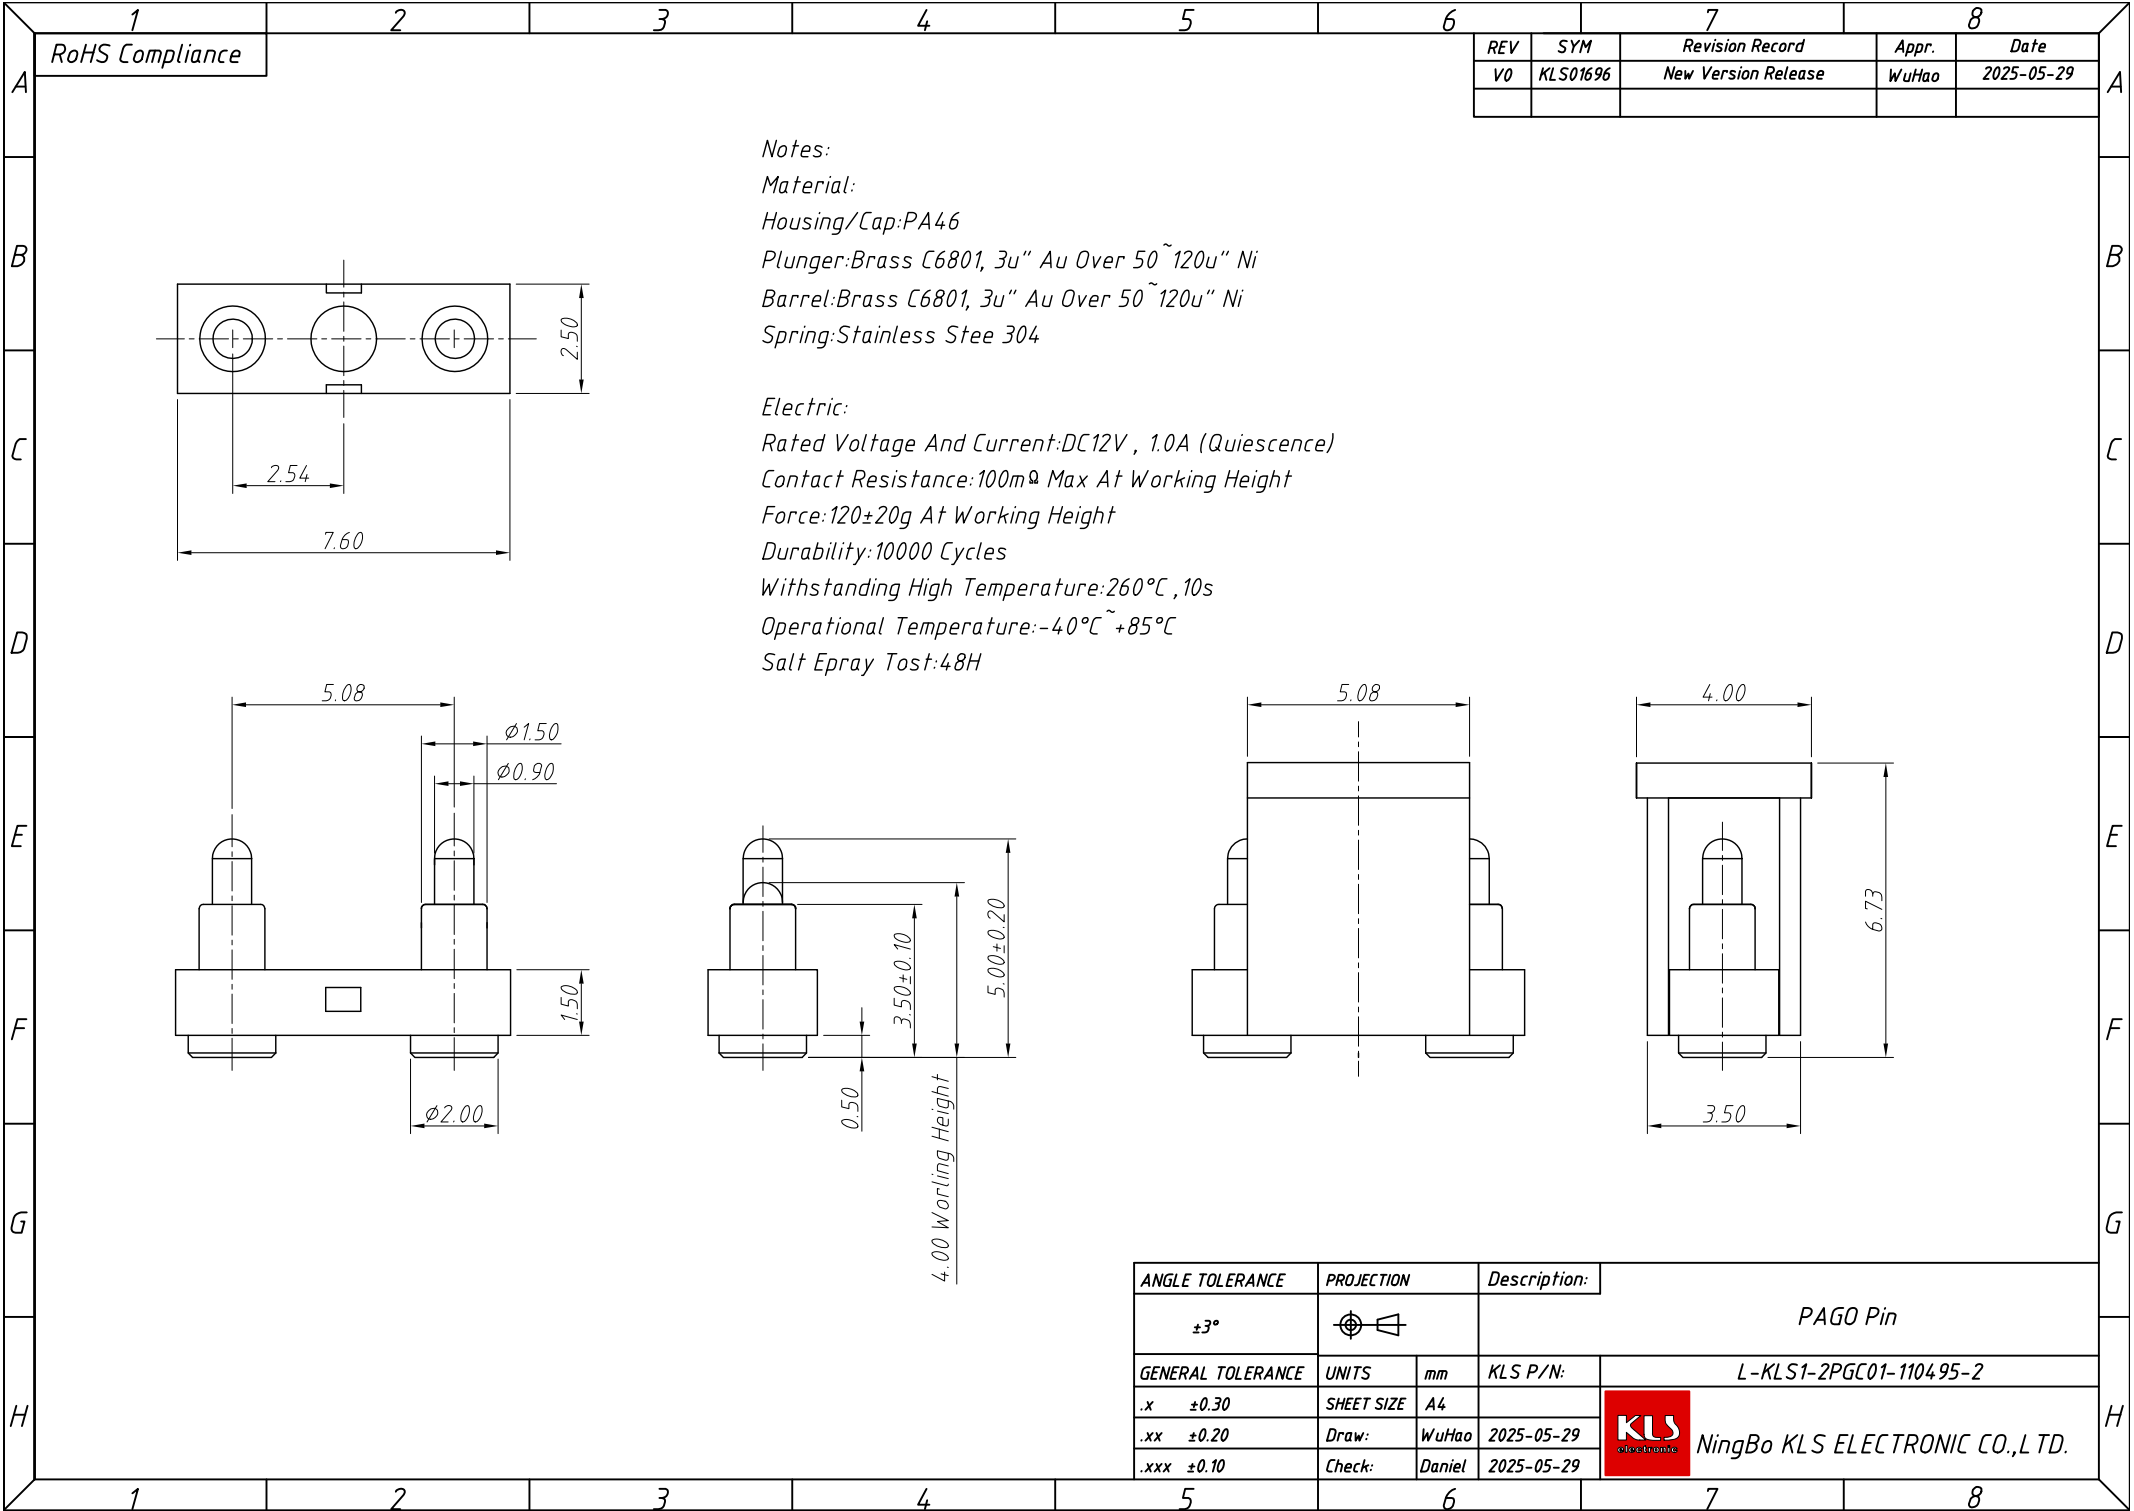

1
RoHS Compliance

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS01696	New Version Release		WuHao	2025-05-29

Notes:
Material:
Housing/Cap:PA46
Plunger:Brass C6801, 3u" Au Over 50~120u" Ni
Barrel:Brass C6801, 3u" Au Over 50~120u" Ni
Spring:Stainless Stee 304

Electric:
Rated Voltage And Current:DC12V , 1.0A (Quiescence)
Contact Resistance:100mΩ Max At Working Height
Force:120±20g At Working Height
Durability:10000 Cycles
Withstanding High Temperature:260℃ , 10s
Operational Temperature:-40℃~+85℃
Salt Epray Tost:48H

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				PAGO Pin	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-2PGC01-110495-2
.x	±0.30	SHEET SIZE	A4		
.xx	±0.20	Draw:	WuHao	2025-05-29	NingBo KLS ELECTRONIC CO.,L.TD.
.xxx	±0.10	Check:	Daniel	2025-05-29	