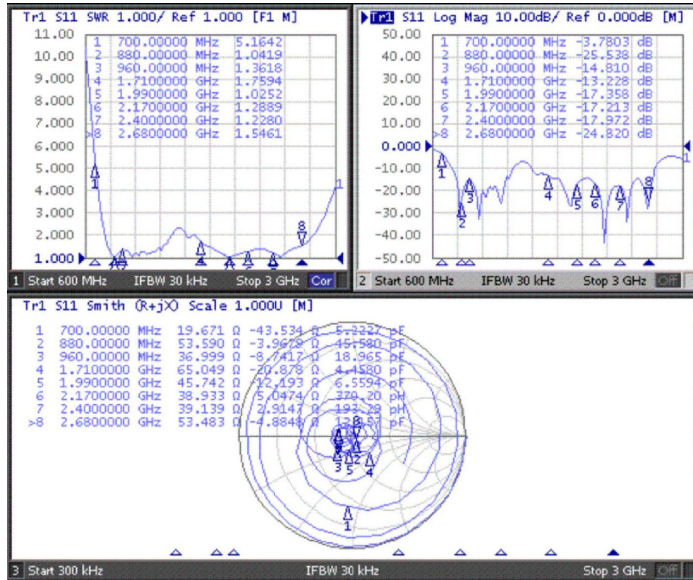


Performance parameters:

Frequency Range:698-960/1710-2700MHz

Band Width:262/990 MHz

Vswr:≤2.0

Gain:-3DBi

Impedance:50 OHM

Polarization:Vertical

Radiation:Omni Directional

Power:10W Max


Temperature:-35°C ~ +80°C

Notes:

The Assembly Of Each Component Should Be Firm And Reliable

The Signal Parameters Of The Finished Product Must Reach The Specified Value

The Product Needs To Be Packaged In Quantity According To The Requirements,
And There Should Be No Obvious Signs During Transportation Phenomena Such
As Compression Deformation

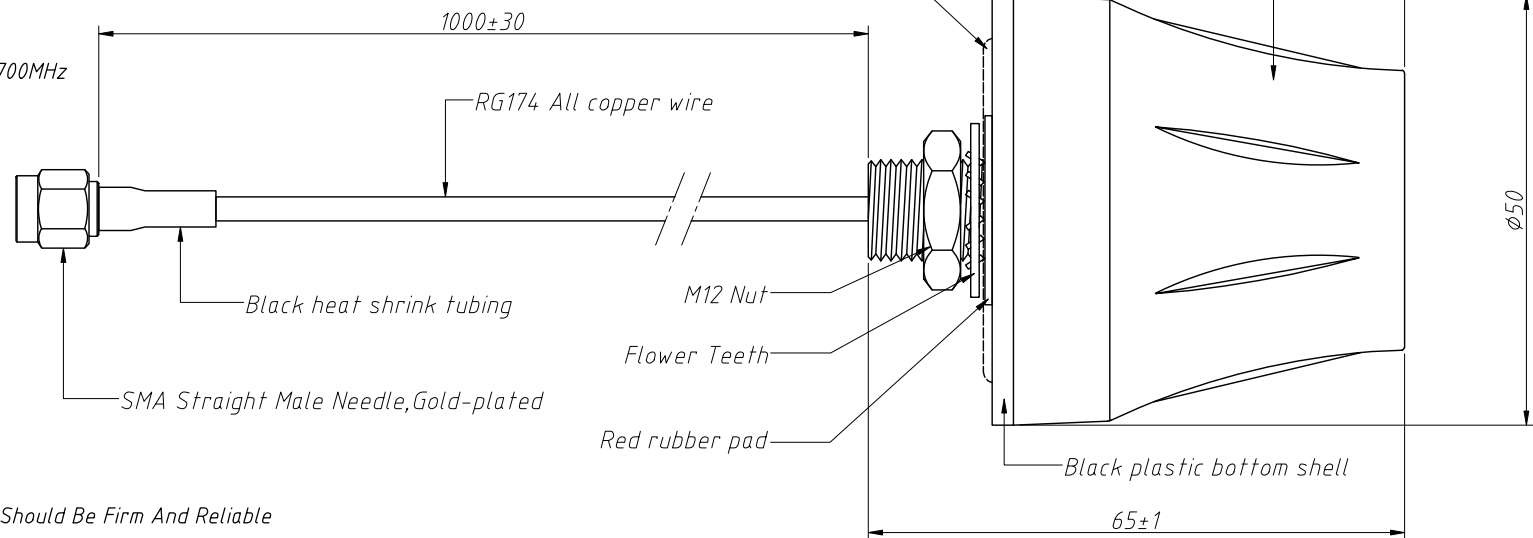

ANGLE TOLERANCE	PROJECTION	Description:
±3°		4G Antenna
GENERAL TOLERANCE	UNITS	mm
.X ±0.30	SHEET SIZE	A4
.XX ±0.20	Draw:	Jenny
.XXX ±0.10	Check:	Daniel

KLS P/N:	L-KLS1-4G350101000
2025-06-03	
2025-06-03	

KLS NingBo KLS ELECTRONIC CO.,LTD.