


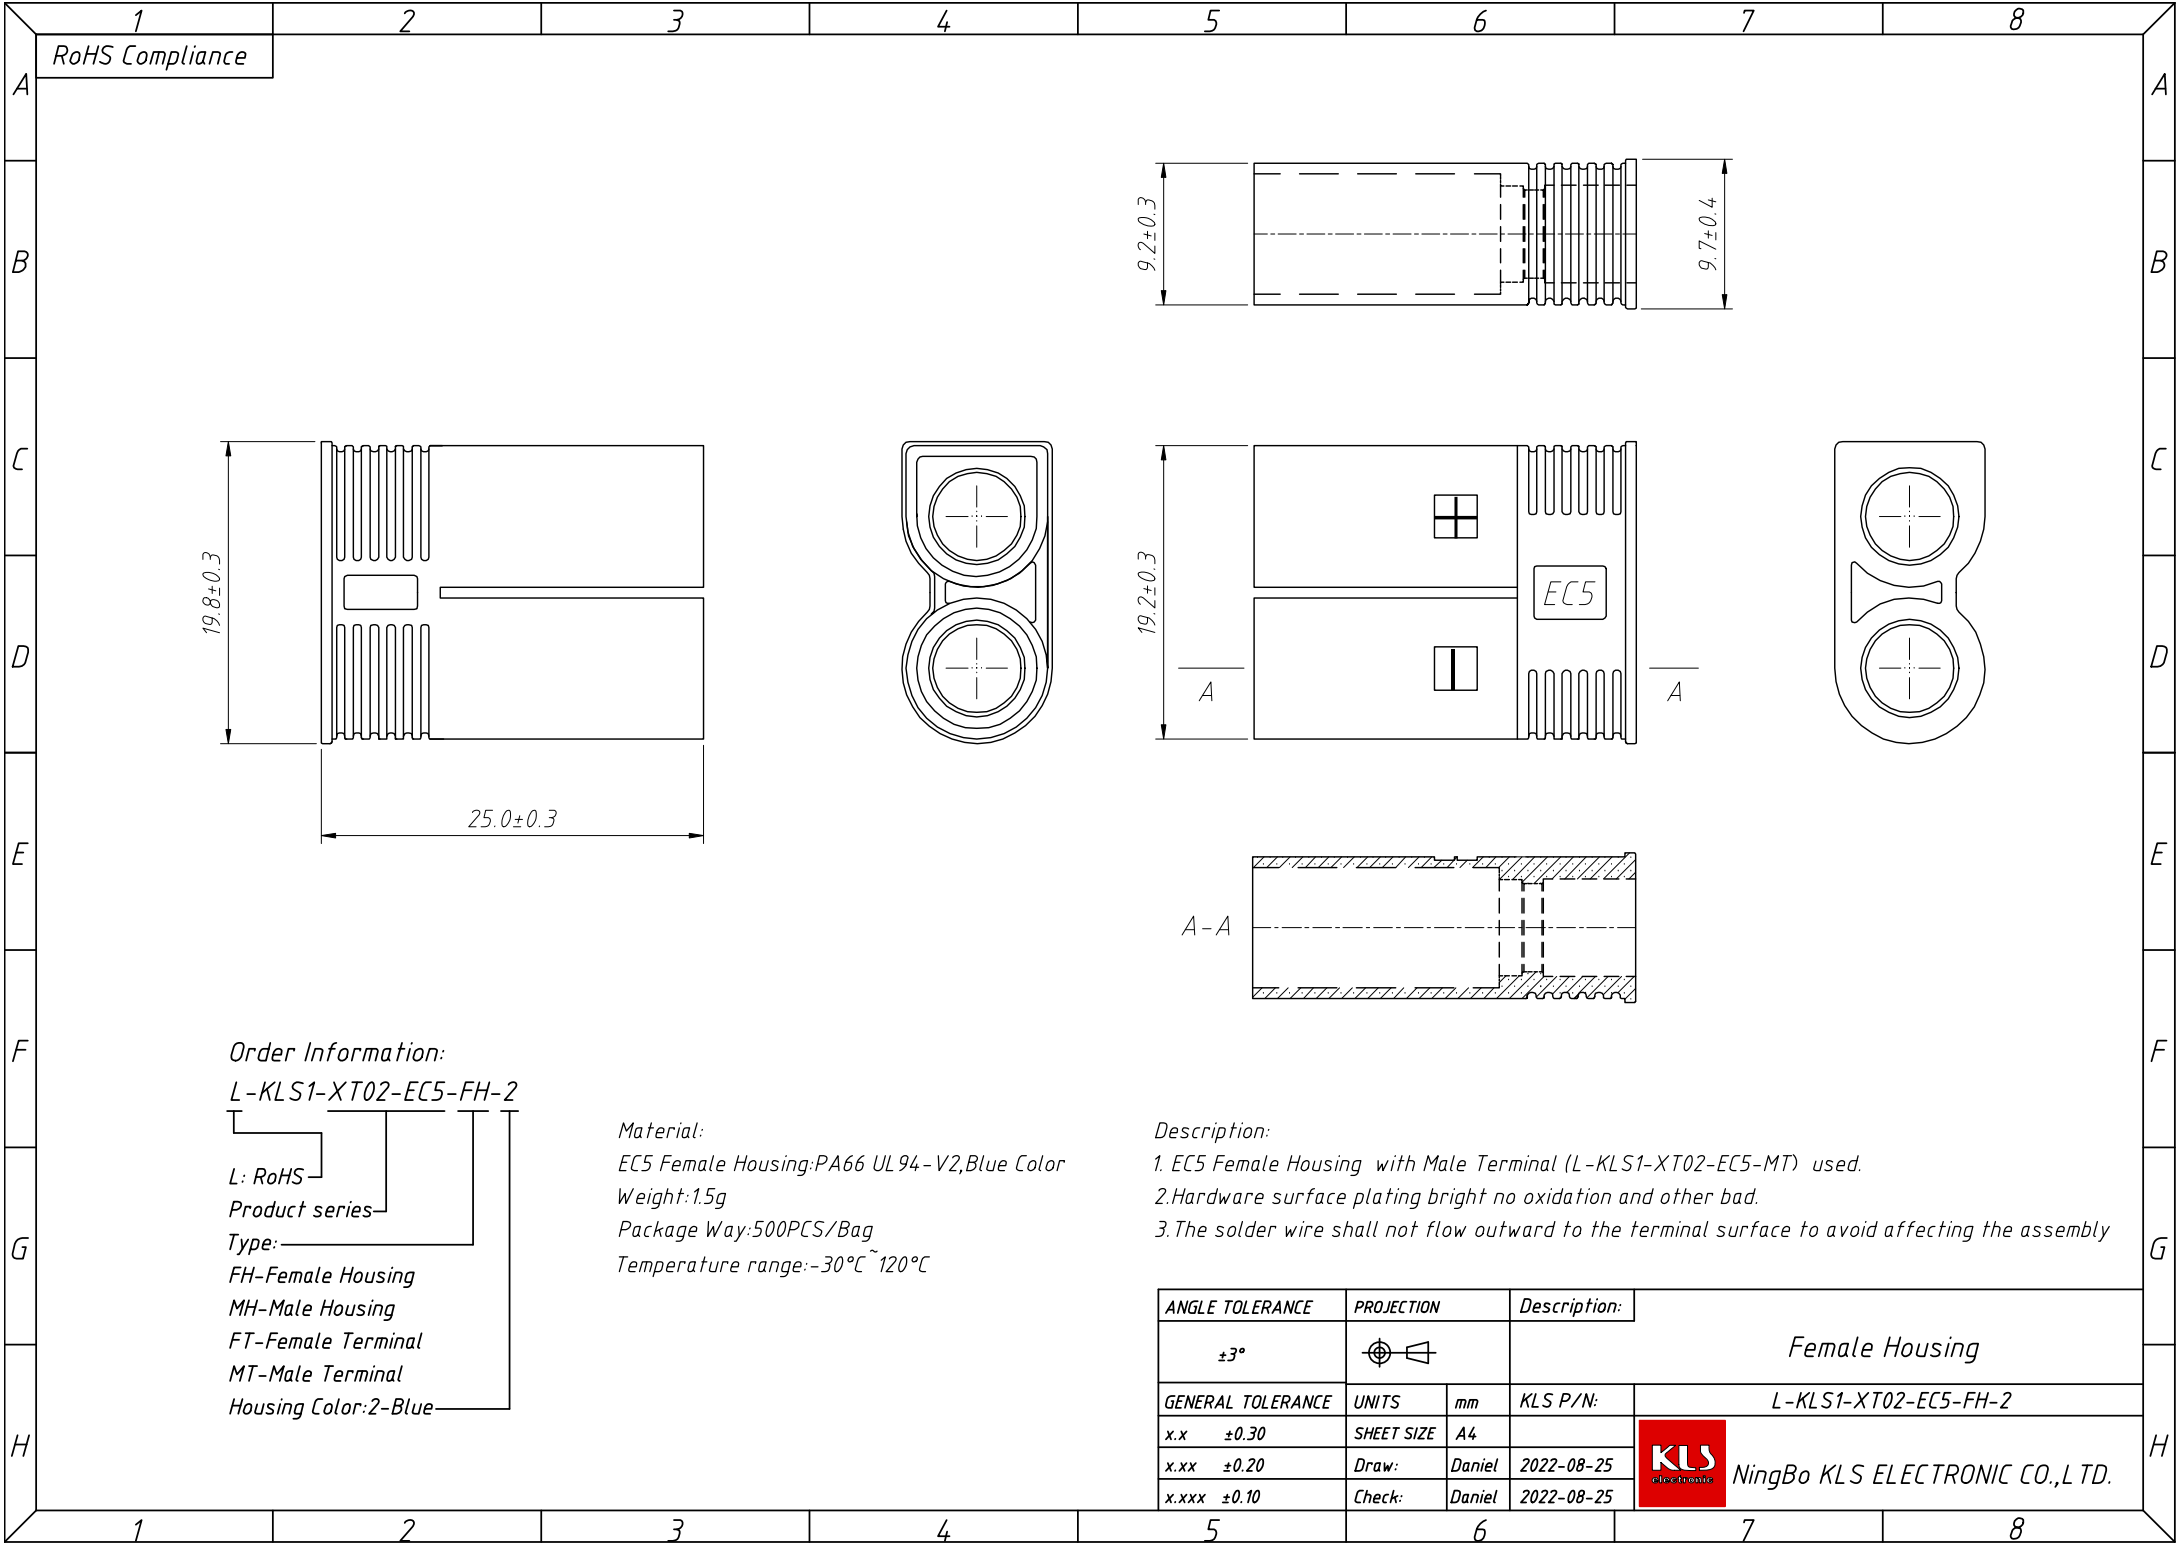

1 RoHS Compliance

A
B
C
D
E
F
G
H

Order Information:

L-KLS1-XT02-EC5-FH-2


L: RoHS
Product series
Type:
FH-Female Housing
MH-Male Housing
FT-Female Terminal
MT-Male Terminal
Housing Color: 2-Blue

Material:
EC5 Female Housing: PA66 UL94-V2, Blue Color
Weight: 1.5g
Package Way: 500PCS/Bag
Temperature range: -30°C ~ 120°C


Description:

- EC5 Female Housing with Male Terminal (L-KLS1-XT02-EC5-MT) used.
- Hardware surface plating bright no oxidation and other bad.
- The solder wire shall not flow outward to the terminal surface to avoid affecting the assembly

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Female Housing	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-XT02-EC5-FH-2
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Daniel	2022-08-25	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx	±0.10	Check:	Daniel	2022-08-25	

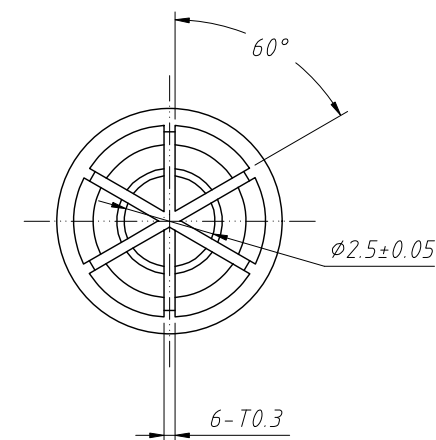

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Male Terminal	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-XT02-EC5-MT
x.x	±0.30	SHEET SIZE	A4		 NingBo KLS ELECTRONIC CO.,L TD.
x.xx	±0.20	Draw:	Daniel	2022-08-25	
x.xxx	±0.10	Check:	Daniel	2022-08-25	

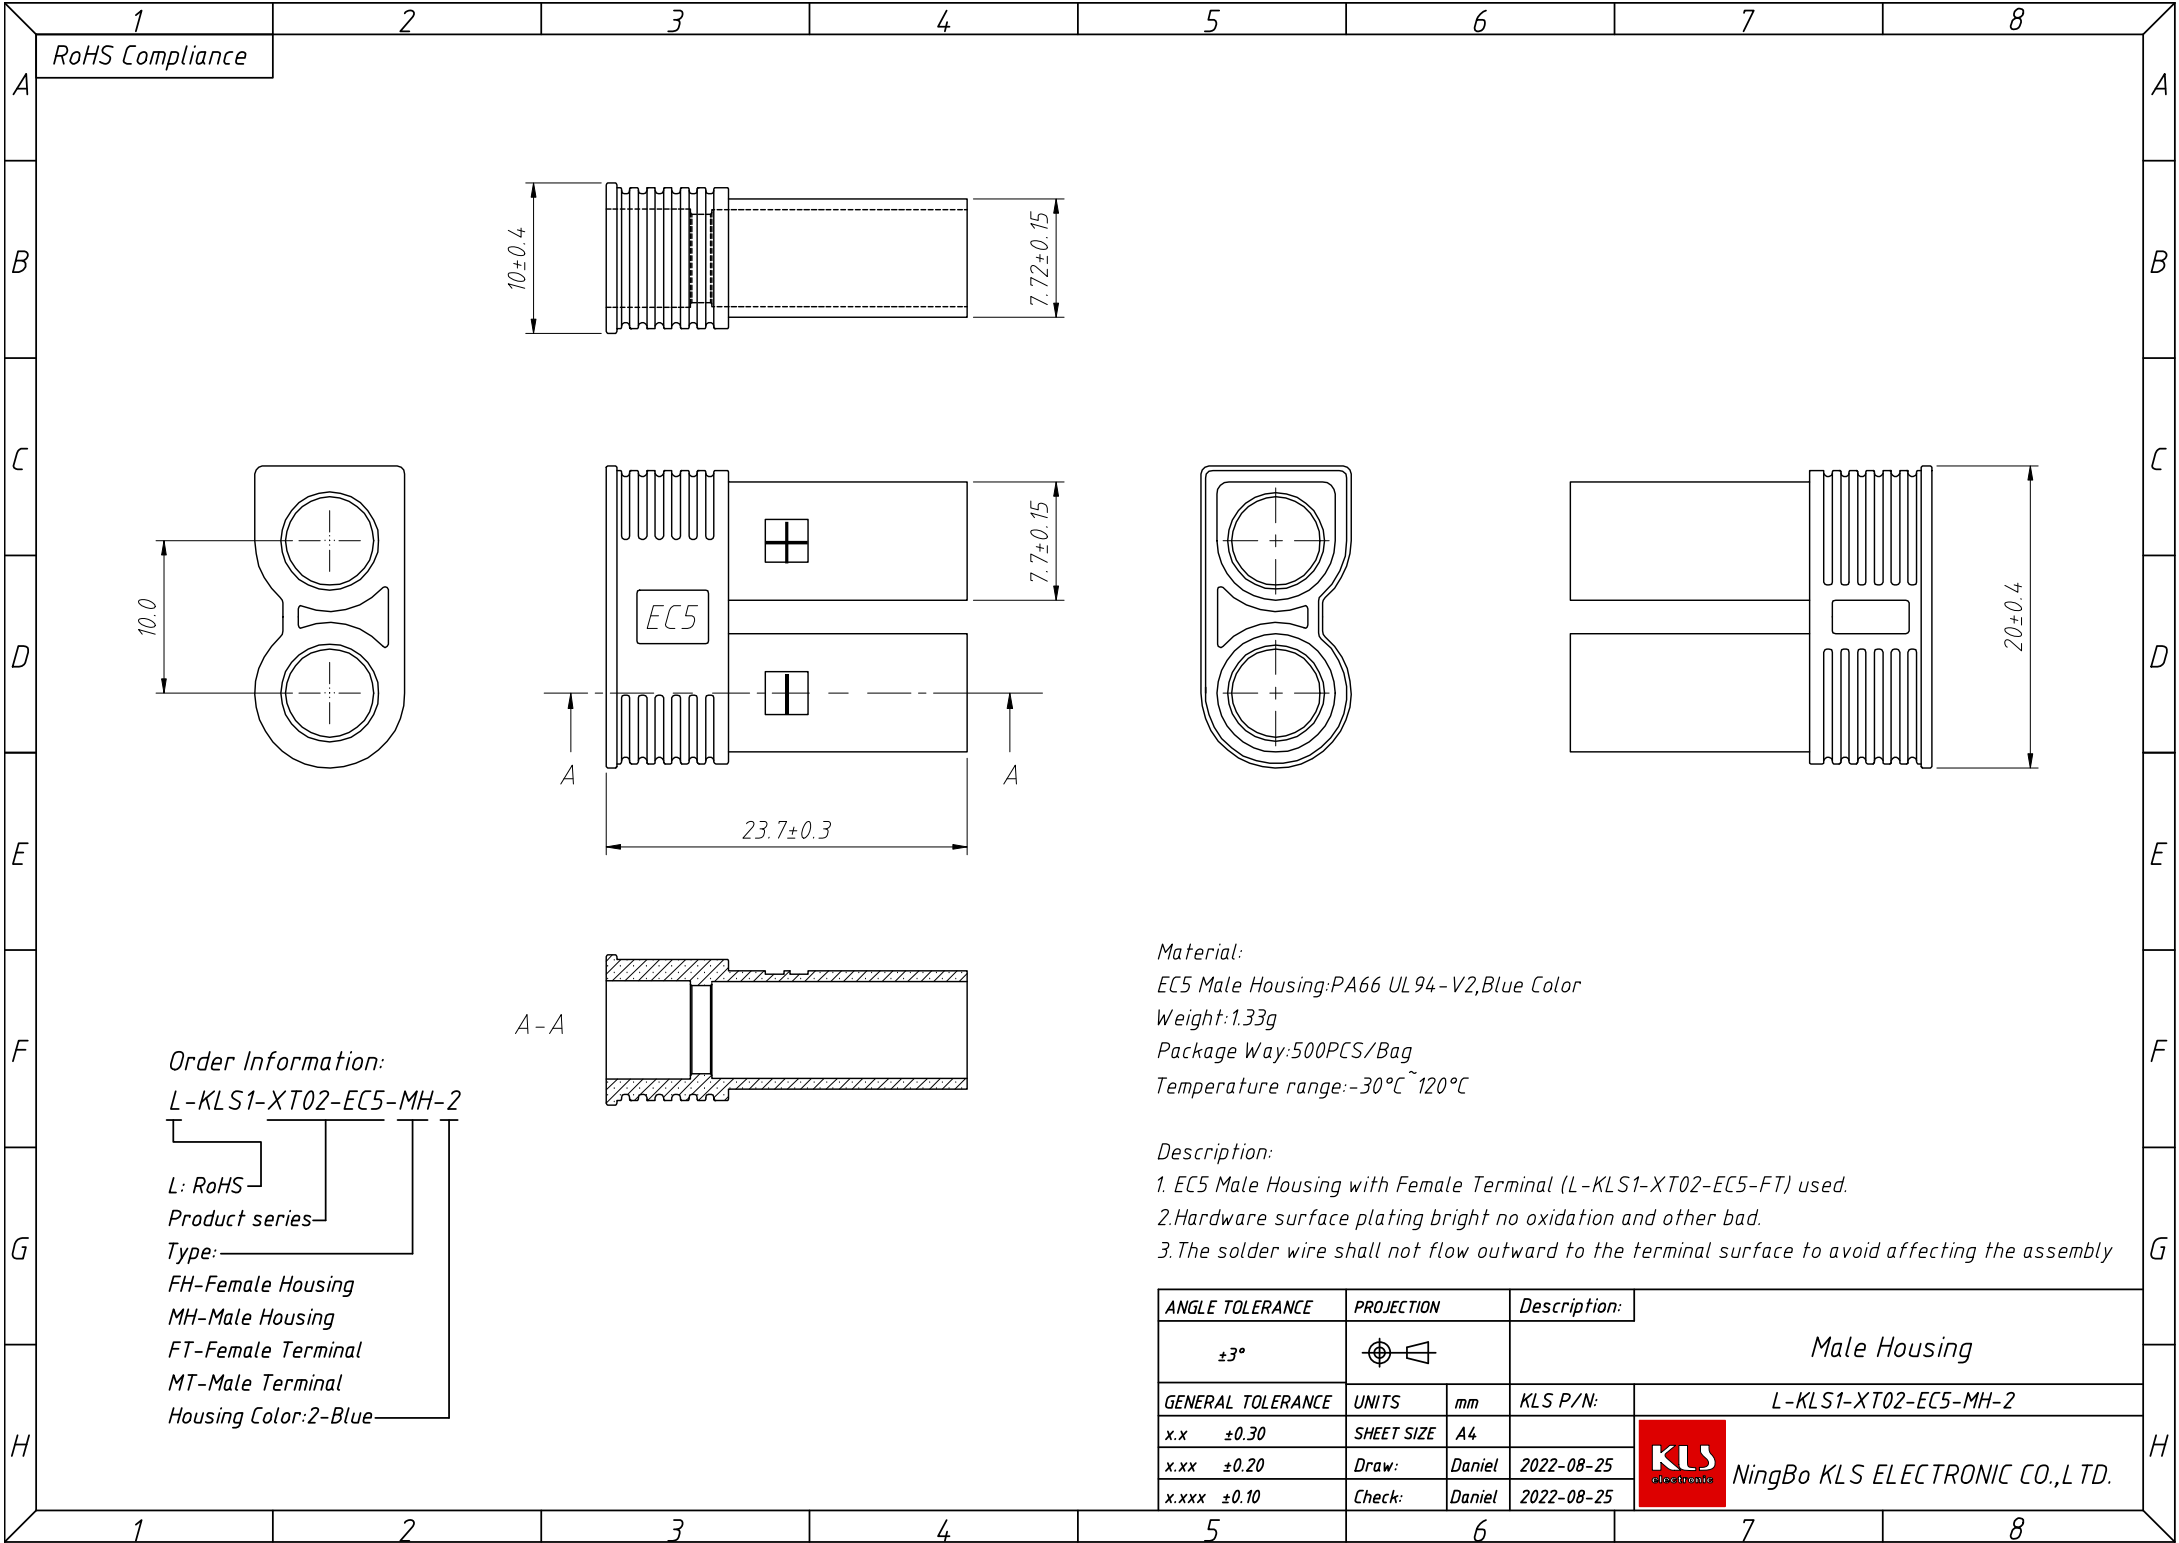

1
RoHS Compliance

2

3

4

5

6

7

8

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H

H


Order Information:
L-KLS1-XT02-EC5-MH-2

L: RoHS
Product series
Type:
FH-Female Housing
MH-Male Housing
FT-Female Terminal
MT-Male Terminal
Housing Color:2-Blue

Material:
EC5 Male Housing:PA66 UL 94 - V2,Blue Color
Weight:1.33g
Package Way:500PCS/Bag
Temperature range:-30℃~120℃

Description:
1. EC5 Male Housing with Female Terminal (L-KLS1-XT02-EC5-FT) used.
2.Hardware surface plating bright no oxidation and other bad.
3.The solder wire shall not flow outward to the terminal surface to avoid affecting the assembly

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Male Housing	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-XT02-EC5-MH-2
x.x	±0.30	SHEET SIZE	A4		
x.xx	±0.20	Draw:	Daniel	2022-08-25	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx	±0.10	Check:	Daniel	2022-08-25	

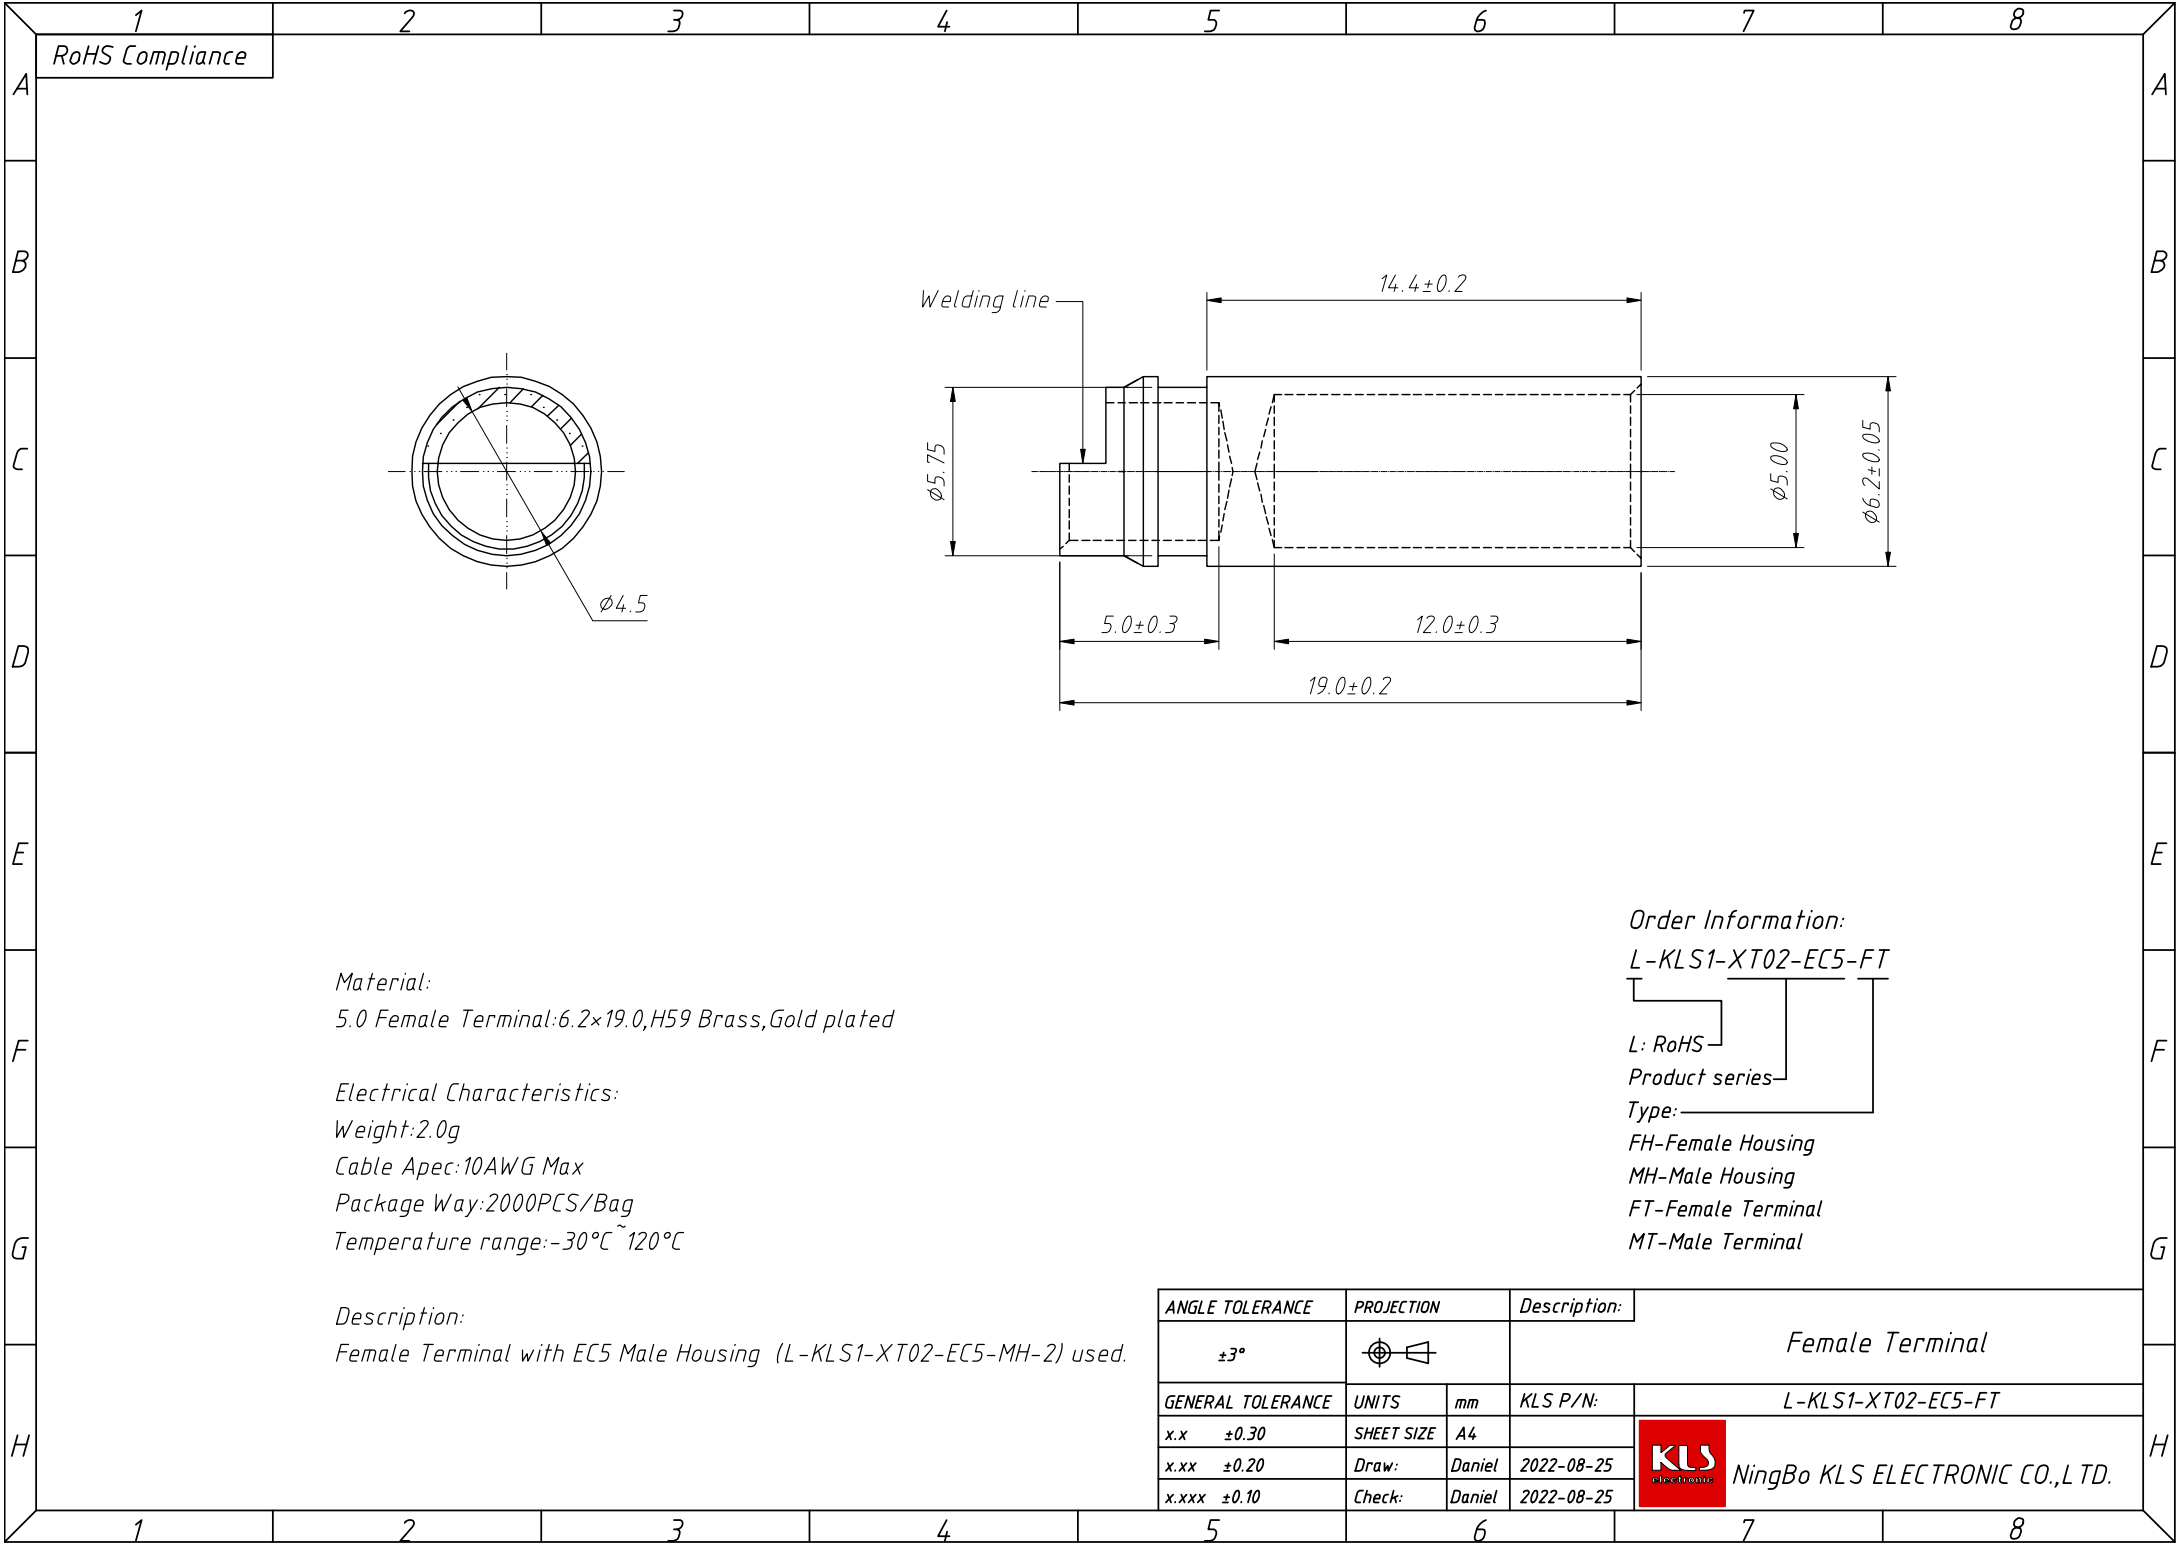

Material:
5.0 Female Terminal: 6.2×19.0, H59 Brass, Gold plated

Electrical Characteristics:
Weight: 2.0g
Cable Apec: 10AWG Max
Package Way: 2000PCS/Bag
Temperature range: -30°C ~ 120°C

Description:
Female Terminal with EC5 Male Housing (L-KLS1-XT02-EC5-MH-2) used.

Order Information:
L-KLS1-XT02-EC5-FT
L: RoHS
Product series
Type:
FH-Female Housing
MH-Male Housing
FT-Female Terminal
MT-Male Terminal

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^{\circ}$				Female Terminal	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x	± 0.30	SHEET SIZE	A4	L-KLS1-XT02-EC5-FT	
x.xx	± 0.20	Draw:	Daniel	2022-08-25	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx	± 0.10	Check:	Daniel	2022-08-25	