


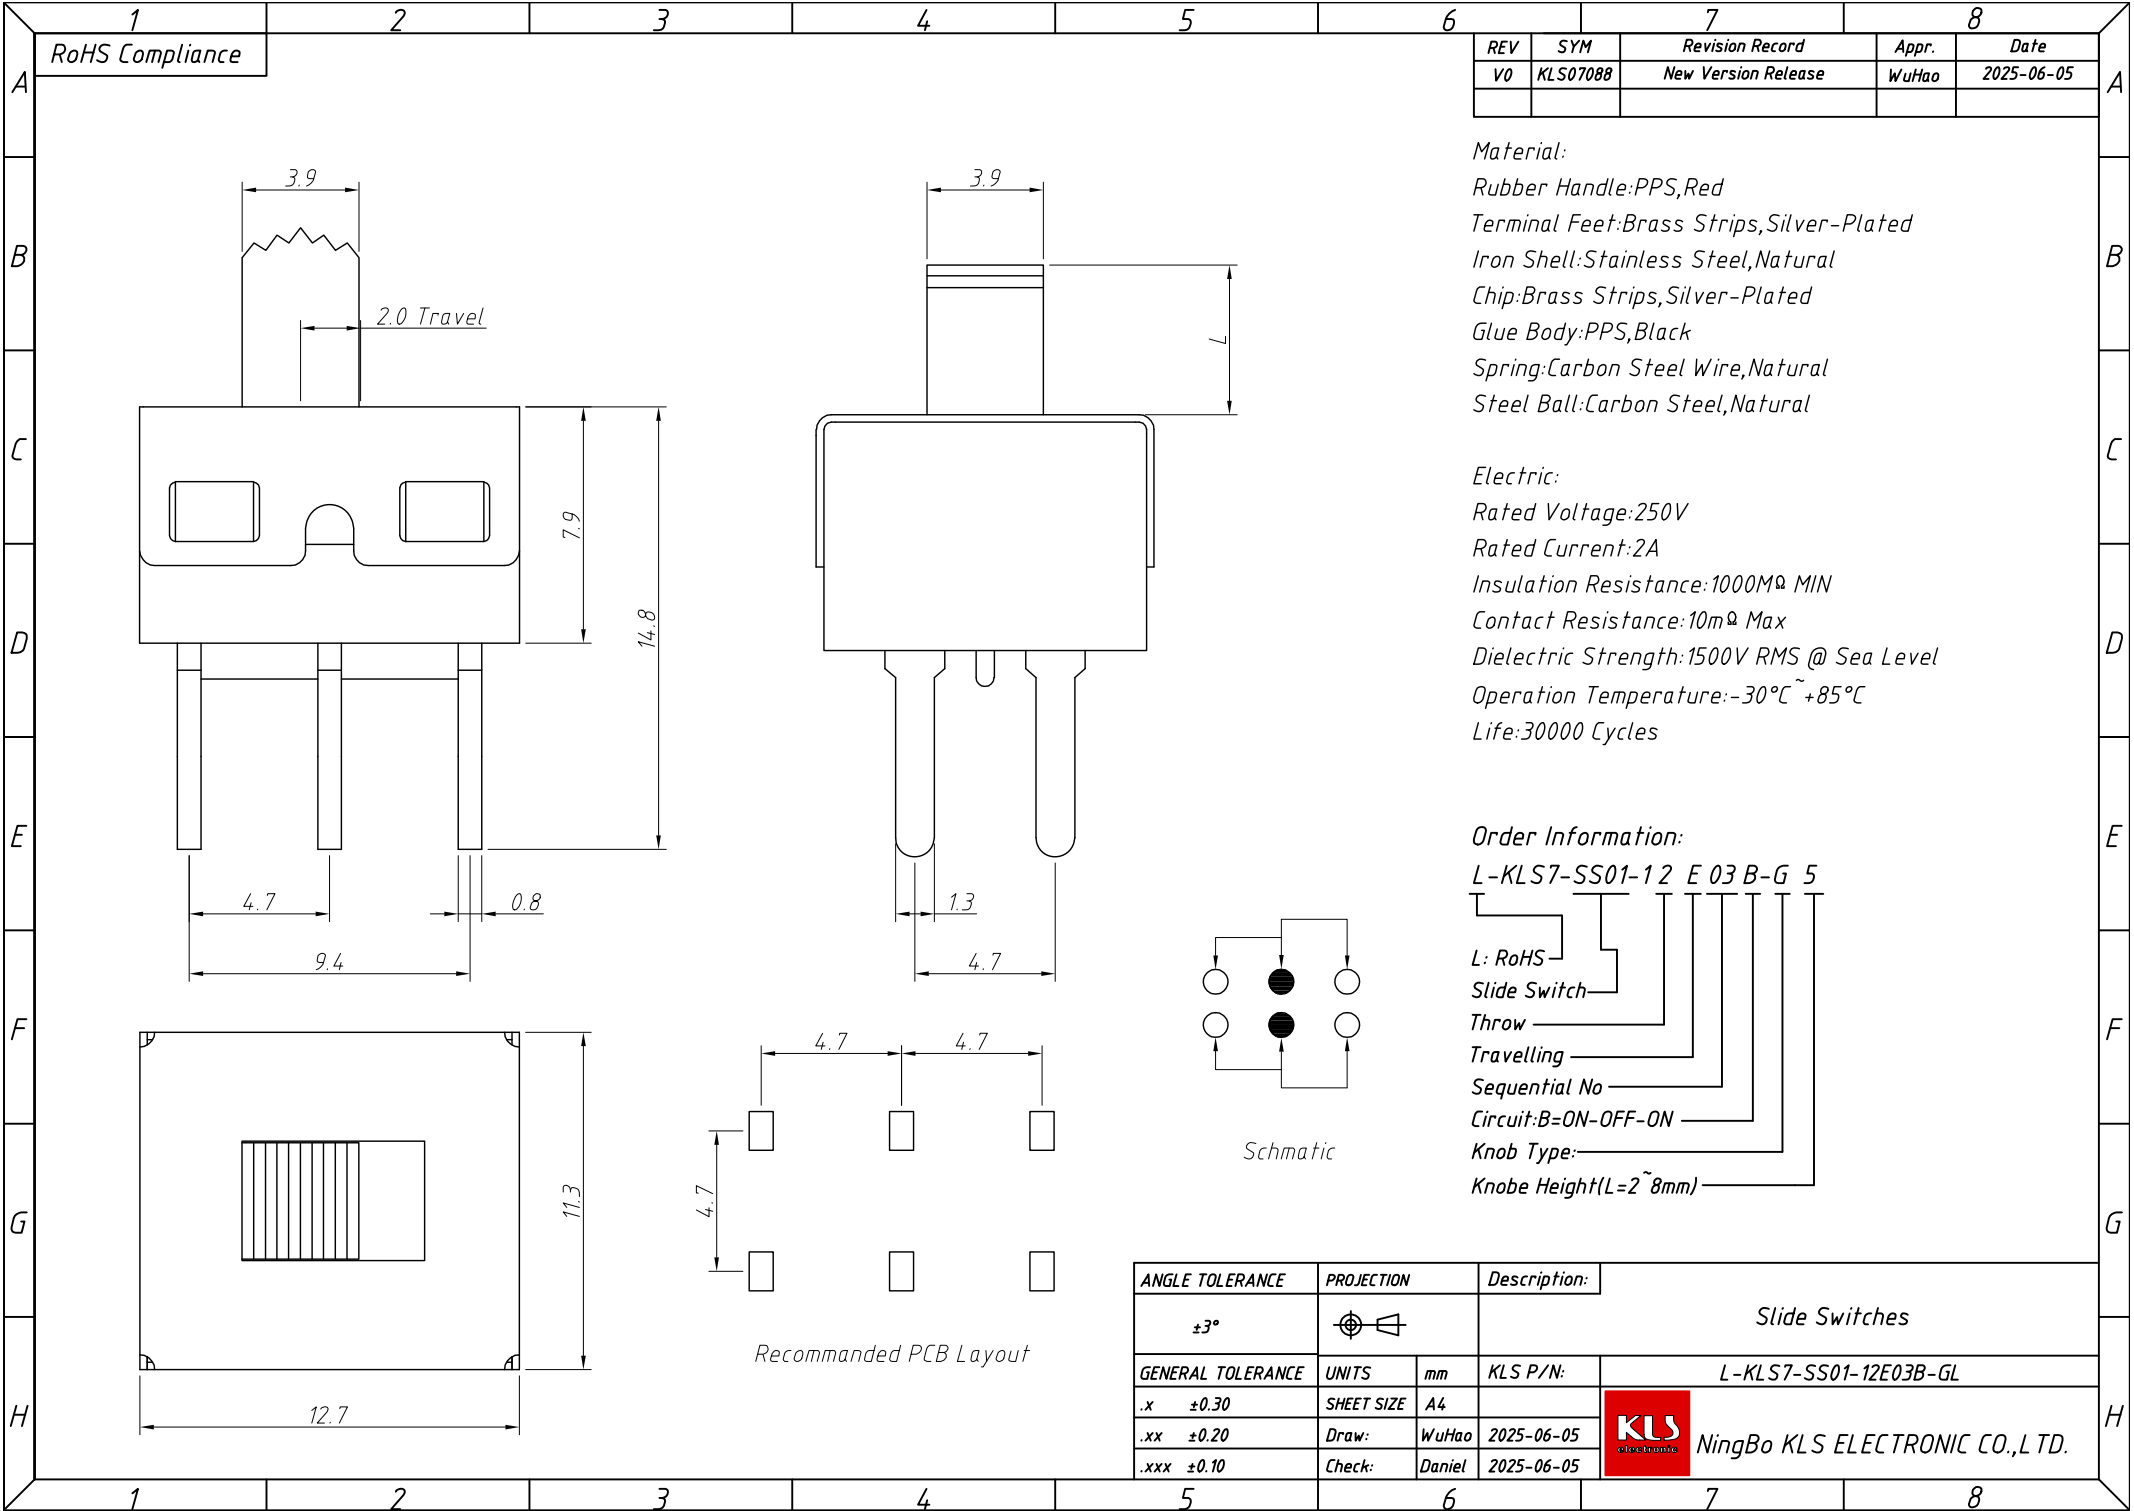


1
RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS07088	New Version Release	WuHao	2025-06-05


Material:
Rubber Handle:PPS,Red
Terminal Feet:Brass Strips,Silver-Plated
Iron Shell:Stainless Steel,Natural
Chip:Brass Strips,Silver-Plated
Glue Body:PPS,Black
Spring:Carbon Steel Wire,Natural
Steel Ball:Carbon Steel,Natural

Electric:
Rated Voltage:250V
Rated Current:2A
Insulation Resistance:1000M Ω MIN
Contact Resistance:10m Ω Max
Dielectric Strength:1500V RMS @ Sea Level
Operation Temperature:-30 $^{\circ}$ C~+85 $^{\circ}$ C
Life:30000 Cycles

Order Information:
L-KLS7-SS01-12 E 03 B-G 5
L: RoHS
Slide Switch
Throw
Travelling
Sequential No
Circuit:B=ON-OFF-ON
Knob Type:
Knobe Height(L=2~8mm)



Schmatic

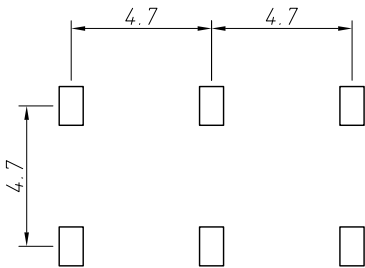

Recommanded PCB Layout

ANGLE TOLERANCE		PROJECTION	Description:	
$\pm 3^{\circ}$			Slide Switches	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:
.x ± 0.30		SHEET SIZE	A4	L-KLS7-SS01-12E03B-GL
.xx ± 0.20		Draw:	WuHao	2025-06-05
.xxx ± 0.10		Check:	Daniel	2025-06-05



NingBo KLS ELECTRONIC CO.,LTD.