


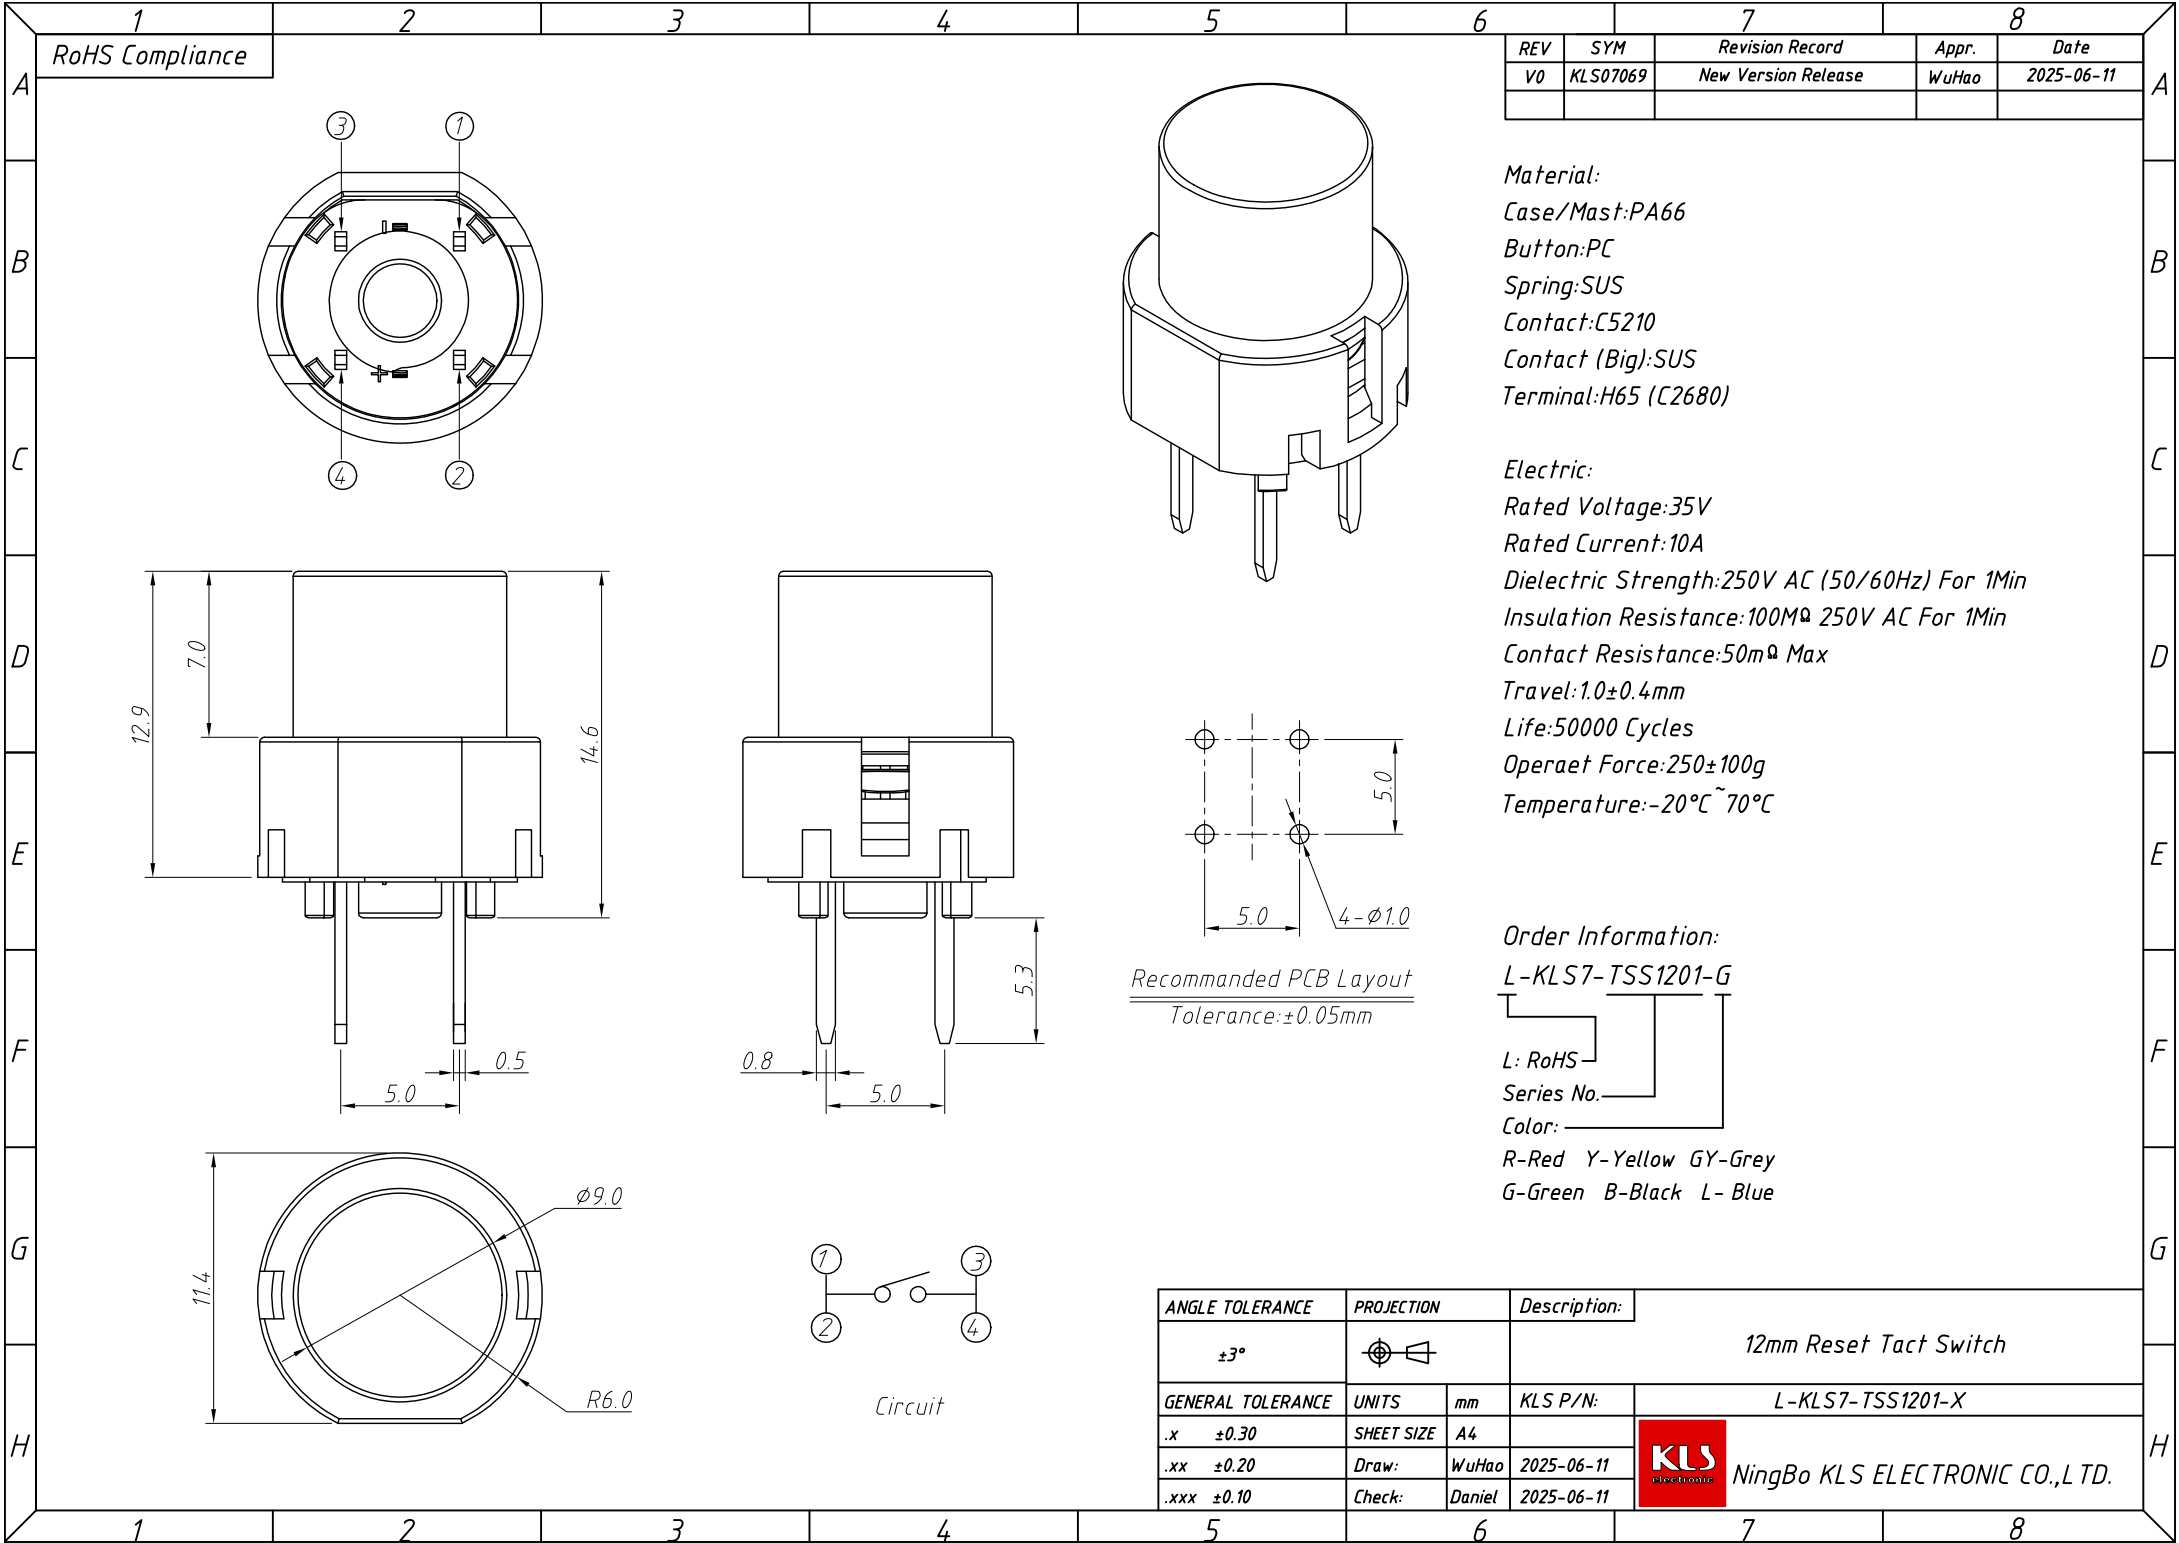

RoHS Compliance

REV		SYM	Revision Record		Appr.	Date
V0		KLS07069	New Version Release		WuHao	2025-06-11

Material:
Case/Mast:PA66
Button:PC
Spring:SUS
Contact:C5210
Contact (Big):SUS
Terminal:H65 (C2680)

Electric:
Rated Voltage:35V
Rated Current:10A
Dielectric Strength:250V AC (50/60Hz) For 1Min
Insulation Resistance:100M Ω 250V AC For 1Min
Contact Resistance:50m Ω Max
Travel:1.0 $\pm$ 0.4mm
Life:50000 Cycles
Operat Force:250 $\pm$ 100g
Temperature:-20 $^{\circ}$ C~70 $^{\circ}$ C

Order Information:
L-KLS7-TSS1201-G
L: RoHS
Series No.
Color:
R-Red Y-Yellow GY-Grey
G-Green B-Black L- Blue

Recommended PCB Layout
Tolerance: $\pm$ 0.05mm

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^{\circ}$				12mm Reset Tact Switch	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
.x ± 0.30		SHEET SIZE	A4	L-KLS7-TSS1201-X	
.xx ± 0.20		Draw:	WuHao	2025-06-11	NingBo KLS ELECTRONIC CO.,L TD.
.xxx ± 0.10		Check:	Daniel	2025-06-11	