


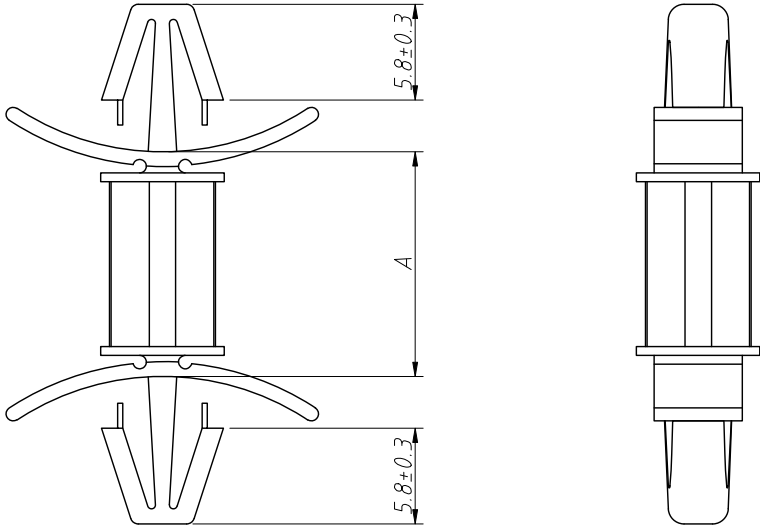

ITEM NO.	A	Mounting Hole (ϕ)	Thickness
L-KLS8-0234F-BH-05	4.8	$\phi 4.8$	0.8~2.0
L-KLS8-0234F-BH-06	6.4		
L-KLS8-0234F-BH-09	9.5		
L-KLS8-0234F-BH-13	12.7		
L-KLS8-0234F-BH-16	15.9		
L-KLS8-0234F-BH-19	19.1		
L-KLS8-0234F-BH-22	22.2		
L-KLS8-0234B-BH-22	22.2		

- Notes:
1. Material: PA66,UL94V-2,Natural
 - 2.Working temperature:0℃~80℃
 - 3.Dipping Bibulous: 2.5% at 20℃ 24H 50% Humidity
 - 4.Withstand Voltage:2500V/0.5mA/1m
 - 5.Heat Resistance:B-130℃ (30m without melting at 200 ℃)
 - 6.Application: the fixed PC board on the boards, free tools,

Unmarked	0~4	4~15	15~30	30~50	50~100	100~
Tolerance	±0.15	±0.2	±0.3	±0.5	±0.7	±1.0

ANGLE TOLERANCE		PROJECTION		Description:		
±3°				PCB spacer supports		
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS8-0234F-BH-XX	
x.x	±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,L TD.	
x.xx	±0.20	Draw:	Jenny			2025-06-11
x.xxx	±0.10	Check:	Daniel			2025-06-11