


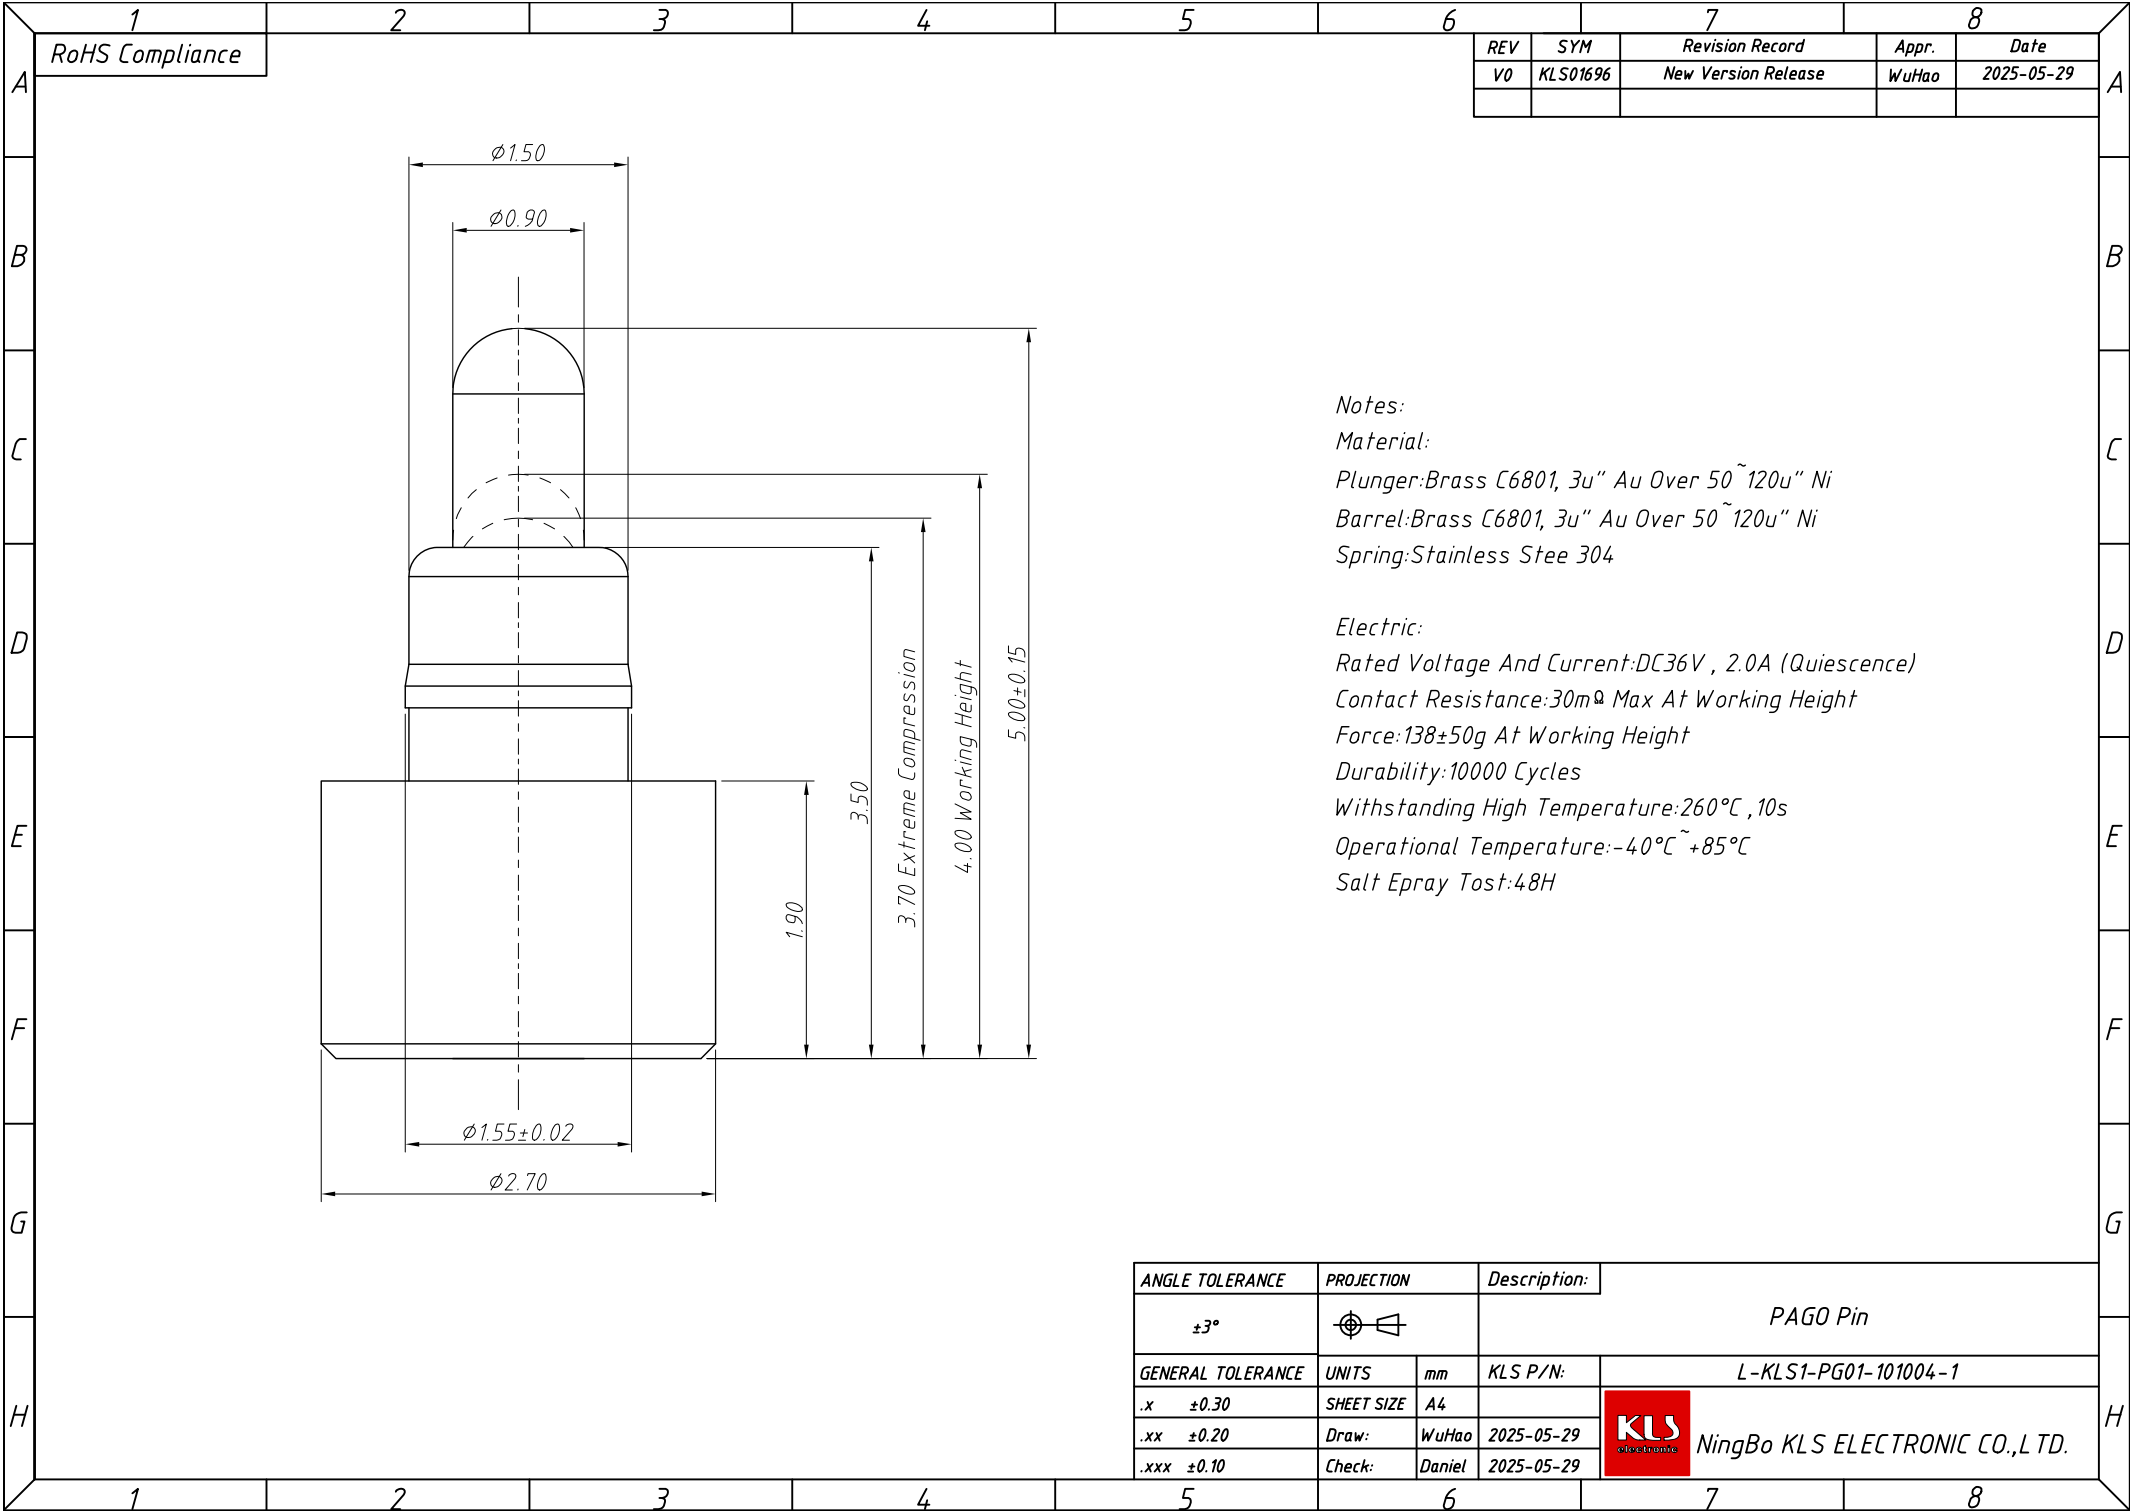

Notes:
Material:
Plunger:Brass C6801, 3u" Au Over 50~120u" Ni
Barrel:Brass C6801, 3u" Au Over 50~120u" Ni
Spring:Stainless Stee 304

Electric:
Rated Voltage And Current:DC36V , 2.0A (Quiescence)
Contact Resistance:30m Ω Max At Working Height
Force:138 $\pm$ 50g At Working Height
Durability:10000 Cycles
Withstanding High Temperature:260 $^{\circ}$ C , 10s
Operational Temperature:-40 $^{\circ}$ C ~+85 $^{\circ}$ C
Salt Epray Tost:48H

ANGLE TOLERANCE		PROJECTION	Description:	
$\pm 3^{\circ}$			PAGO Pin	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:
.x ± 0.30		SHEET SIZE	A4	L-KLS1-PG01-101004-1
.xx ± 0.20		Draw:	WuHao	2025-05-29
.xxx ± 0.10		Check:	Daniel	2025-05-29

NingBo KLS ELECTRONIC CO.,L.TD.