


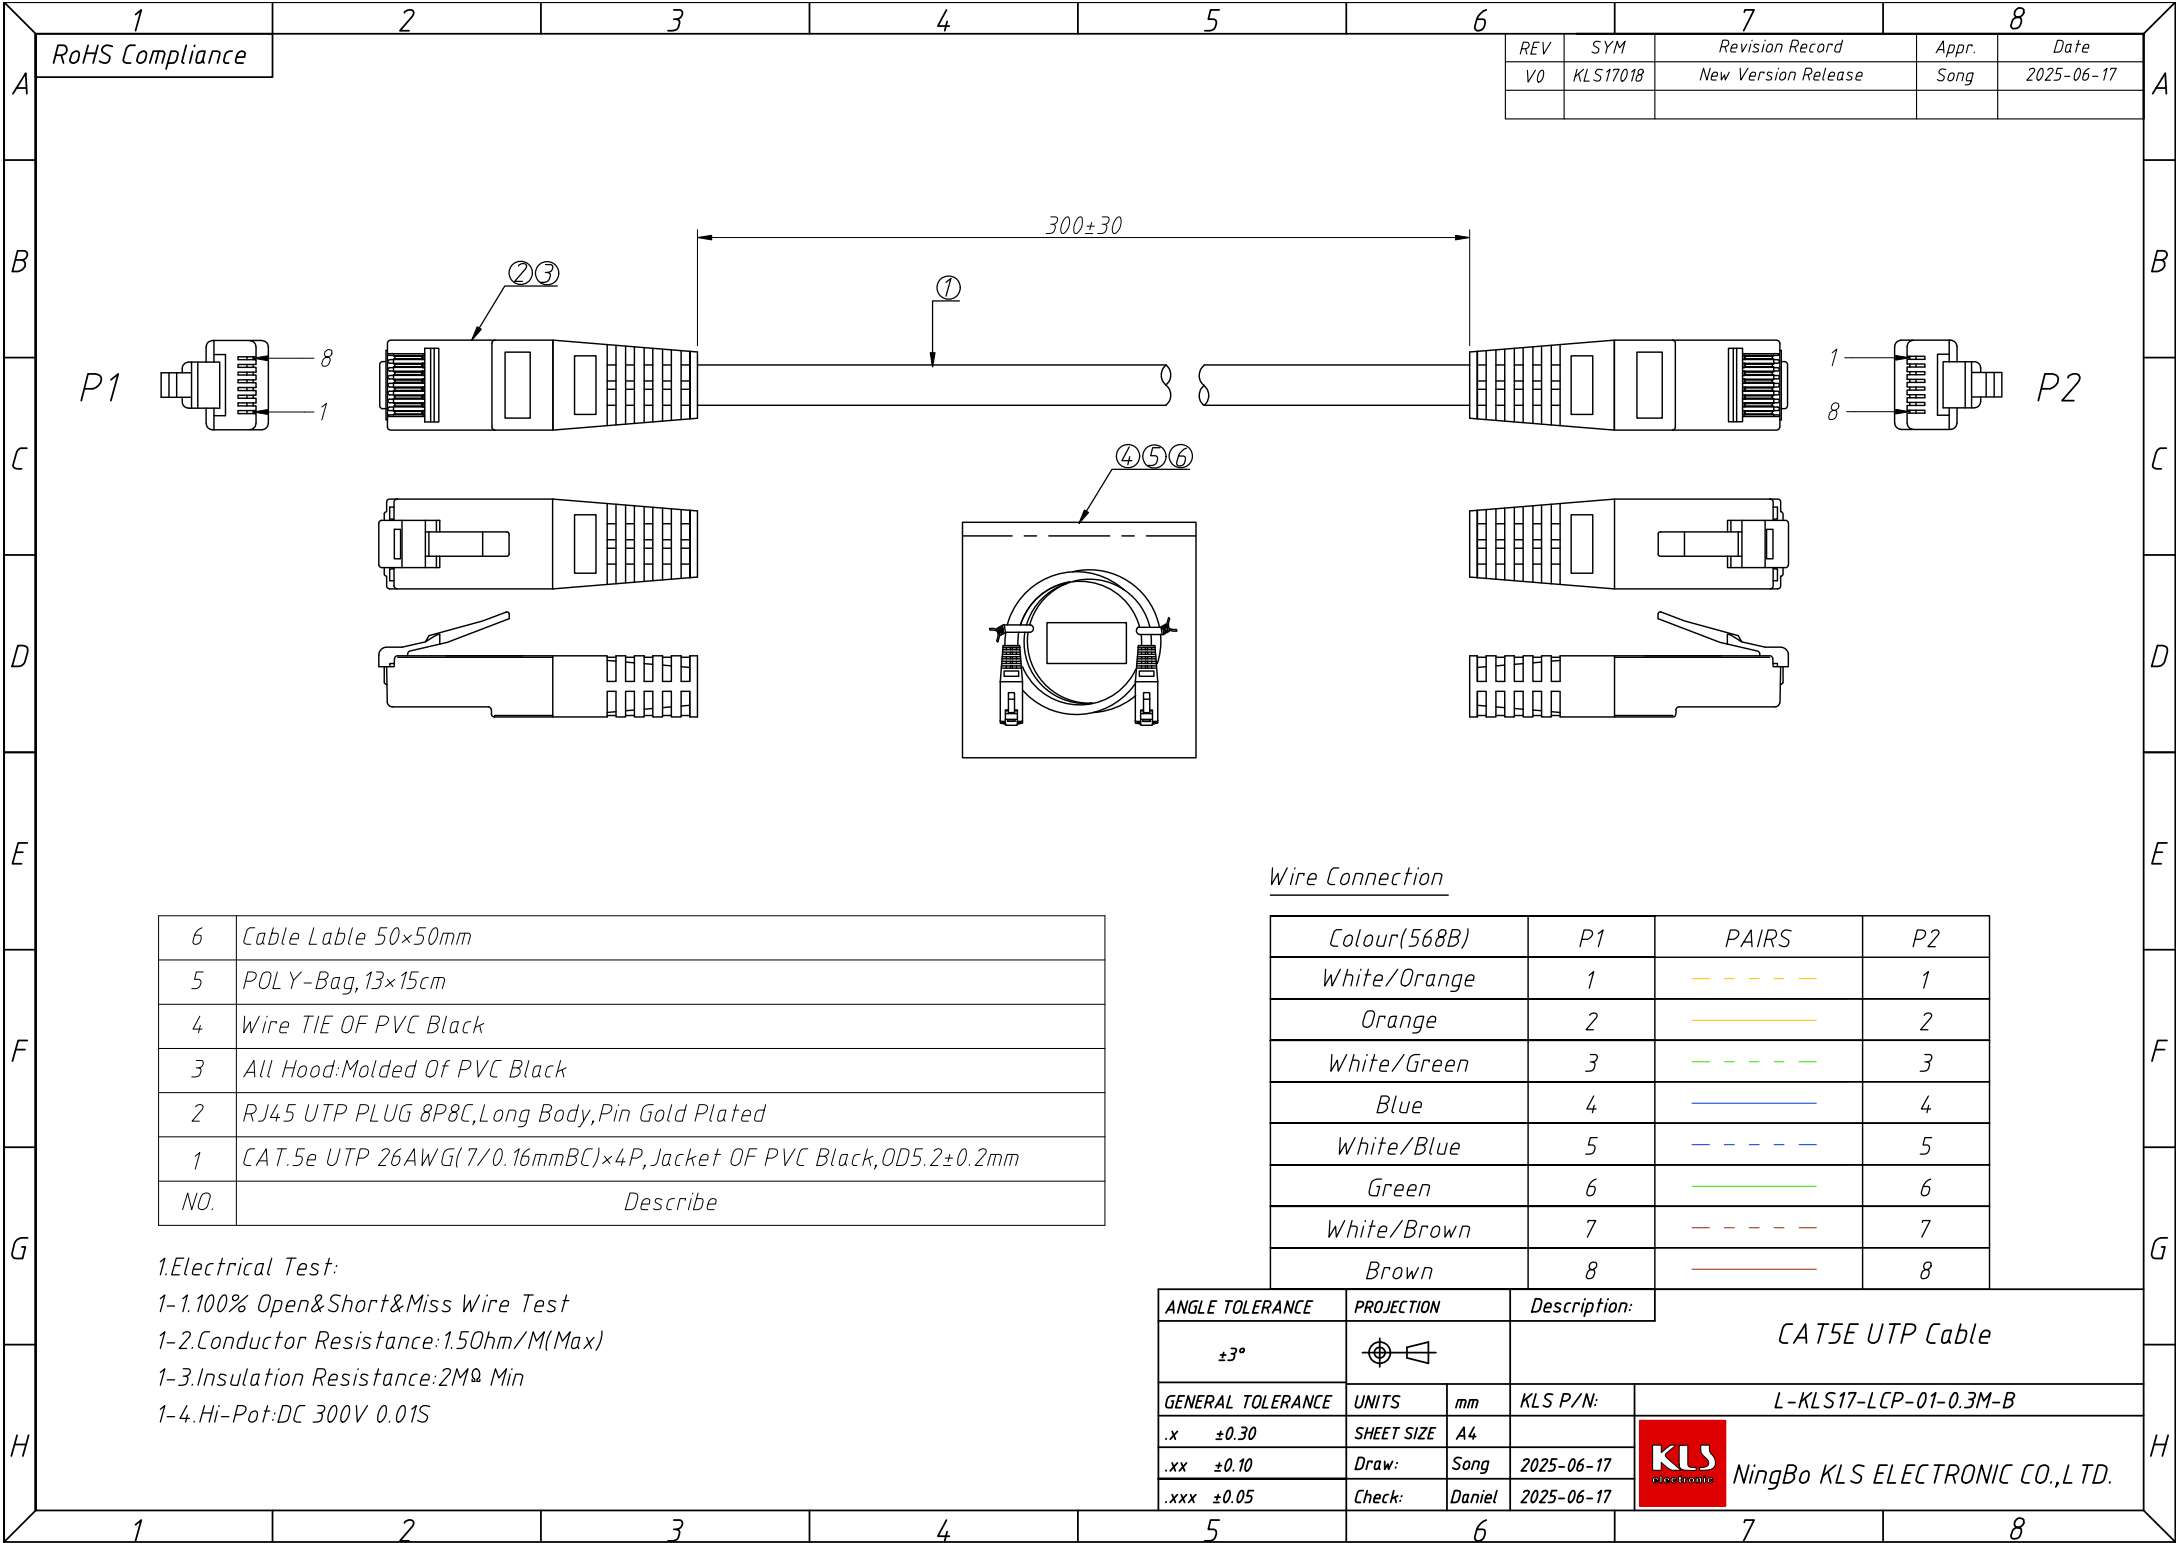

1
RoHS Compliance

7		8	
REV	SYM	Revision Record	Appr.
V0	KLS17018	New Version Release	Song
		Date	
		2025-06-17	

6	Cable Lable 50×50mm
5	POL Y-Bag, 13×15cm
4	Wire TIE OF PVC Black
3	All Hood:Molded Of PVC Black
2	RJ45 UTP PLUG 8P8C, Long Body, Pin Gold Plated
1	CAT.5e UTP 26AWG(7/0.16mmBC)×4P, Jacket OF PVC Black, OD5.2±0.2mm
NO.	Describe

1.Electrical Test:
1-1.100% Open&Short&Miss Wire Test
1-2.Conductor Resistance:1.50hm/M(Max)
1-3.Insulation Resistance:2MΩ Min
1-4.Hi-Pot:DC 300V 0.01S

Wire Connection

Colour(568B)	P1	PAIRS	P2
White/Orange	1	---	1
Orange	2	---	2
White/Green	3	---	3
Blue	4	---	4
White/Blue	5	---	5
Green	6	---	6
White/Brown	7	---	7
Brown	8	---	8

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				CAT5E UTP Cable	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
.x	±0.30	SHEET SIZE	A4	L-KLS17-LCP-01-0.3M-B	
.xx	±0.10	Draw:	Song	NingBo KLS ELECTRONIC CO.,L TD.	
.xxx	±0.05	Check:	Daniel		