


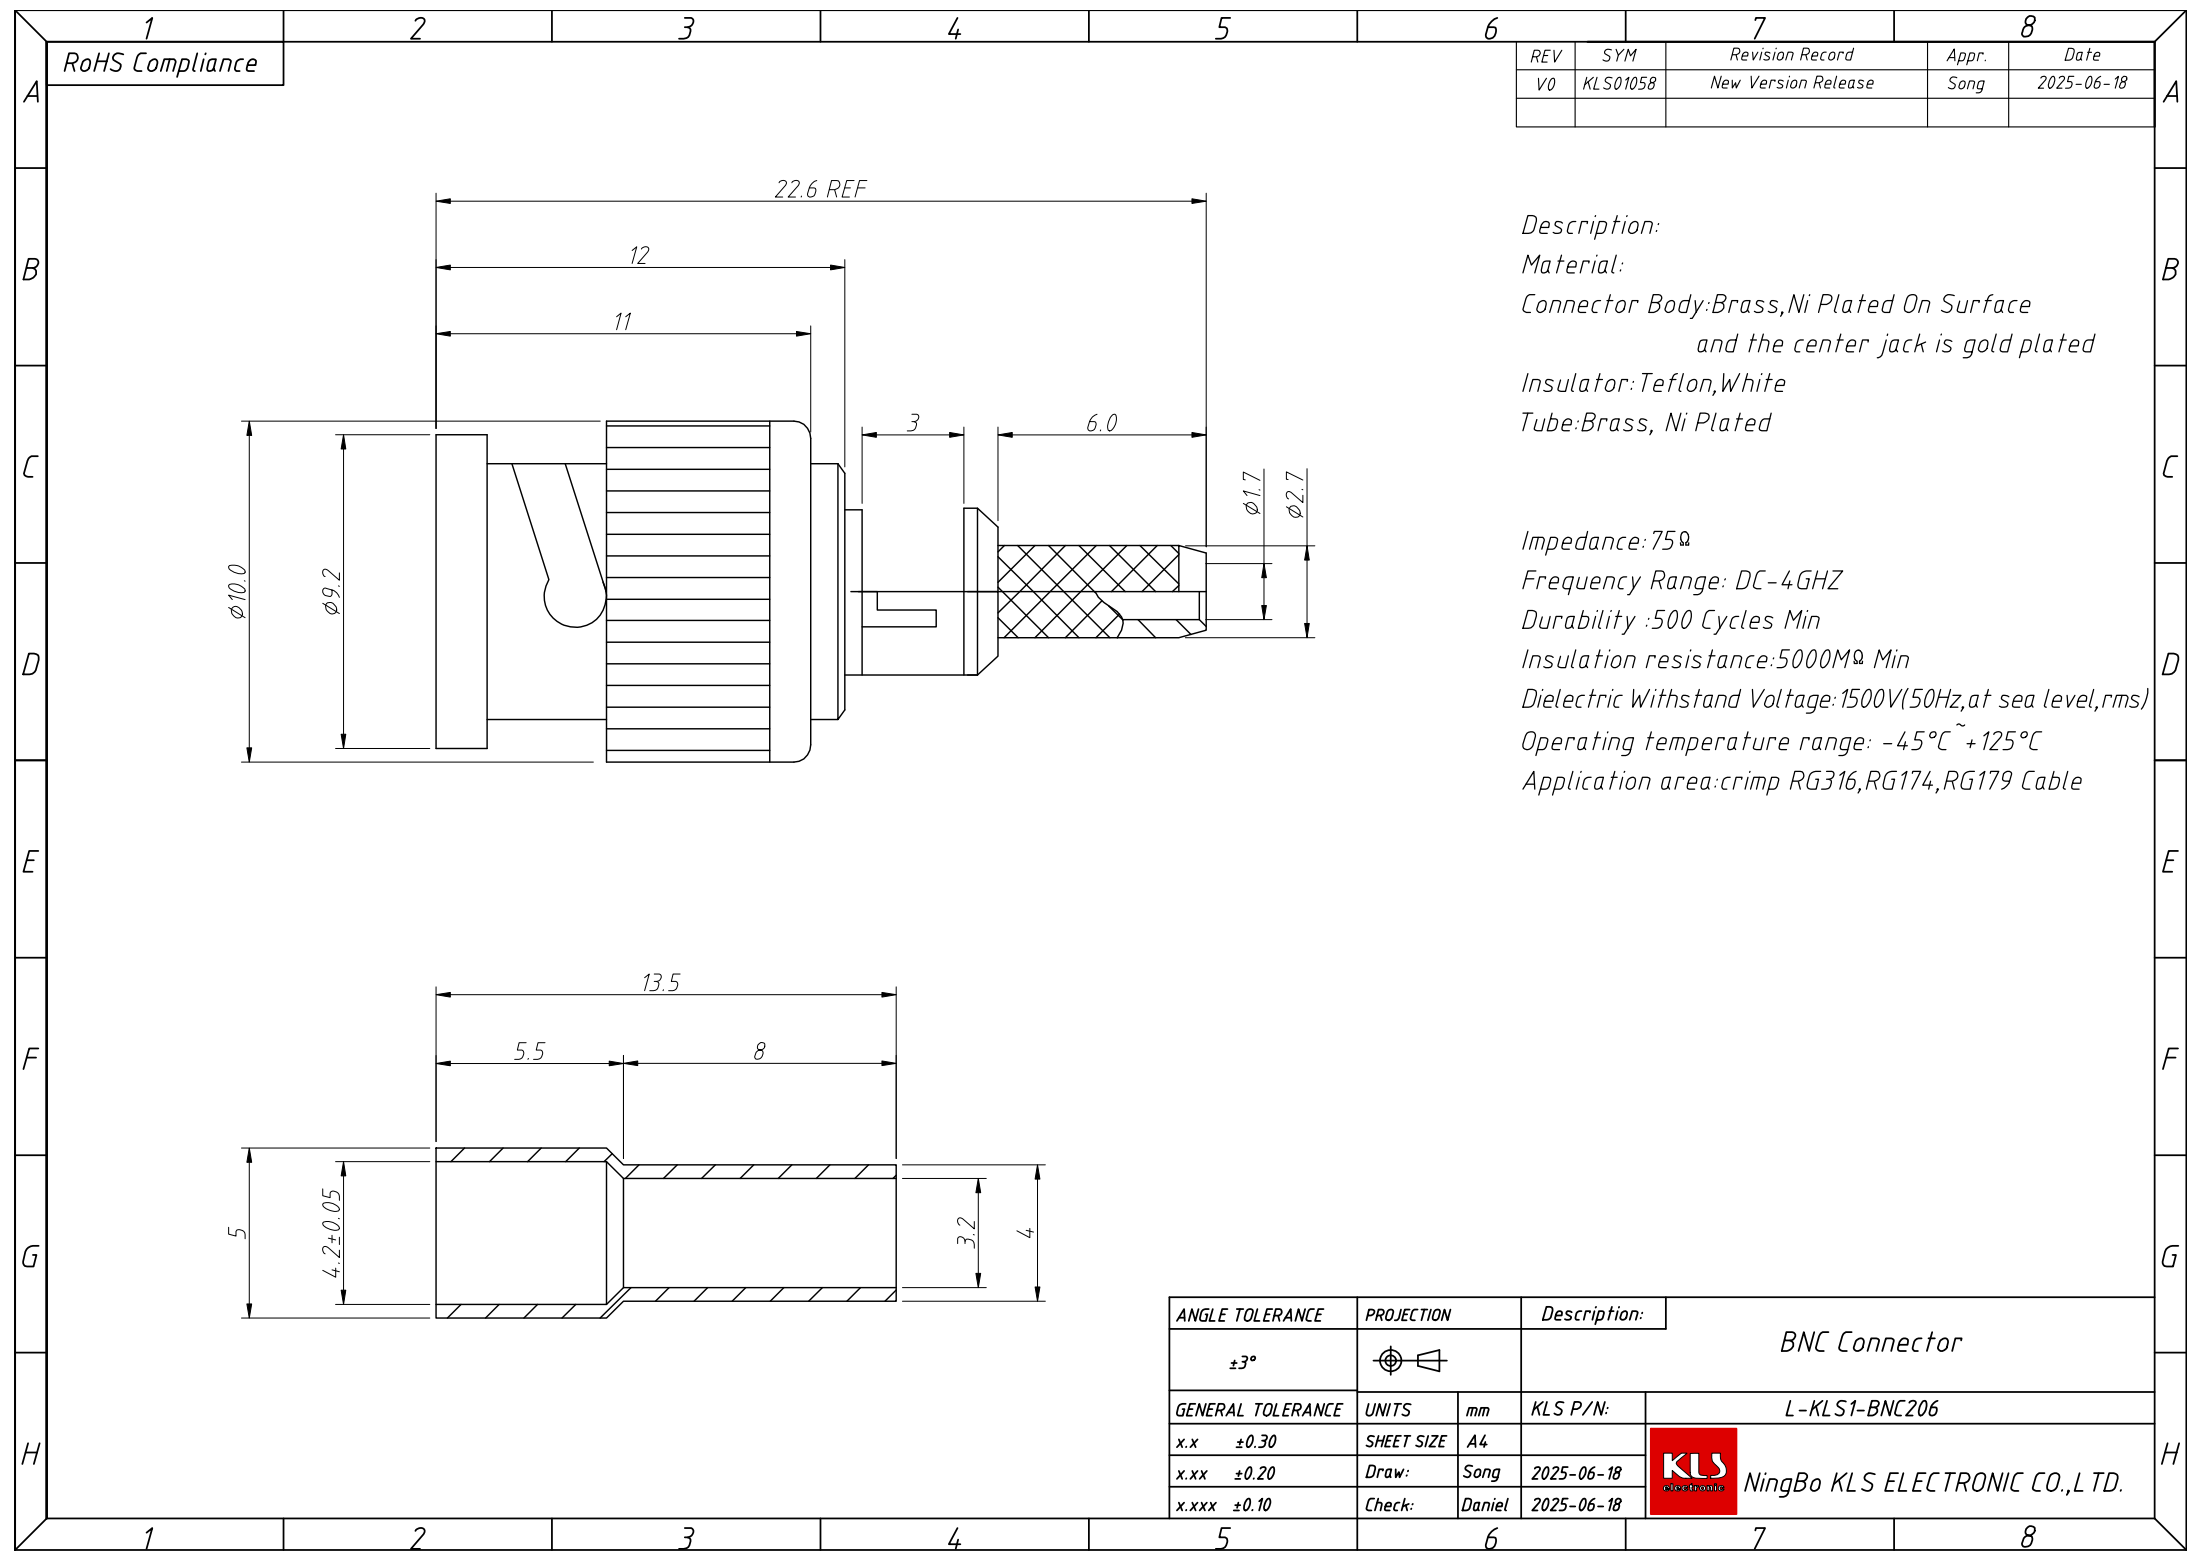

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01058	New Version Release	Song	2025-06-18

Description:
Material:
Connector Body:Brass,Ni Plated On Surface
and the center jack is gold plated
Insulator:Teflon,White
Tube:Brass, Ni Plated

Impedance:75Ω
Frequency Range: DC-4GHZ
Durability :500 Cycles Min
Insulation resistance:5000MΩ Min
Dielectric Withstand Voltage:1500V(50Hz,at sea level,rms)
Operating temperature range: -45℃ ~ +125℃
Application area:crimp RG316,RG174,RG179 Cable

ANGLE TOLERANCE	PROJECTION	Description:	BNC Connector	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-BNC206
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Song	2025-06-18	NingBo KLS ELECTRONIC CO.,L TD.
x.xxx ±0.10	Check:	Daniel	2025-06-18	