


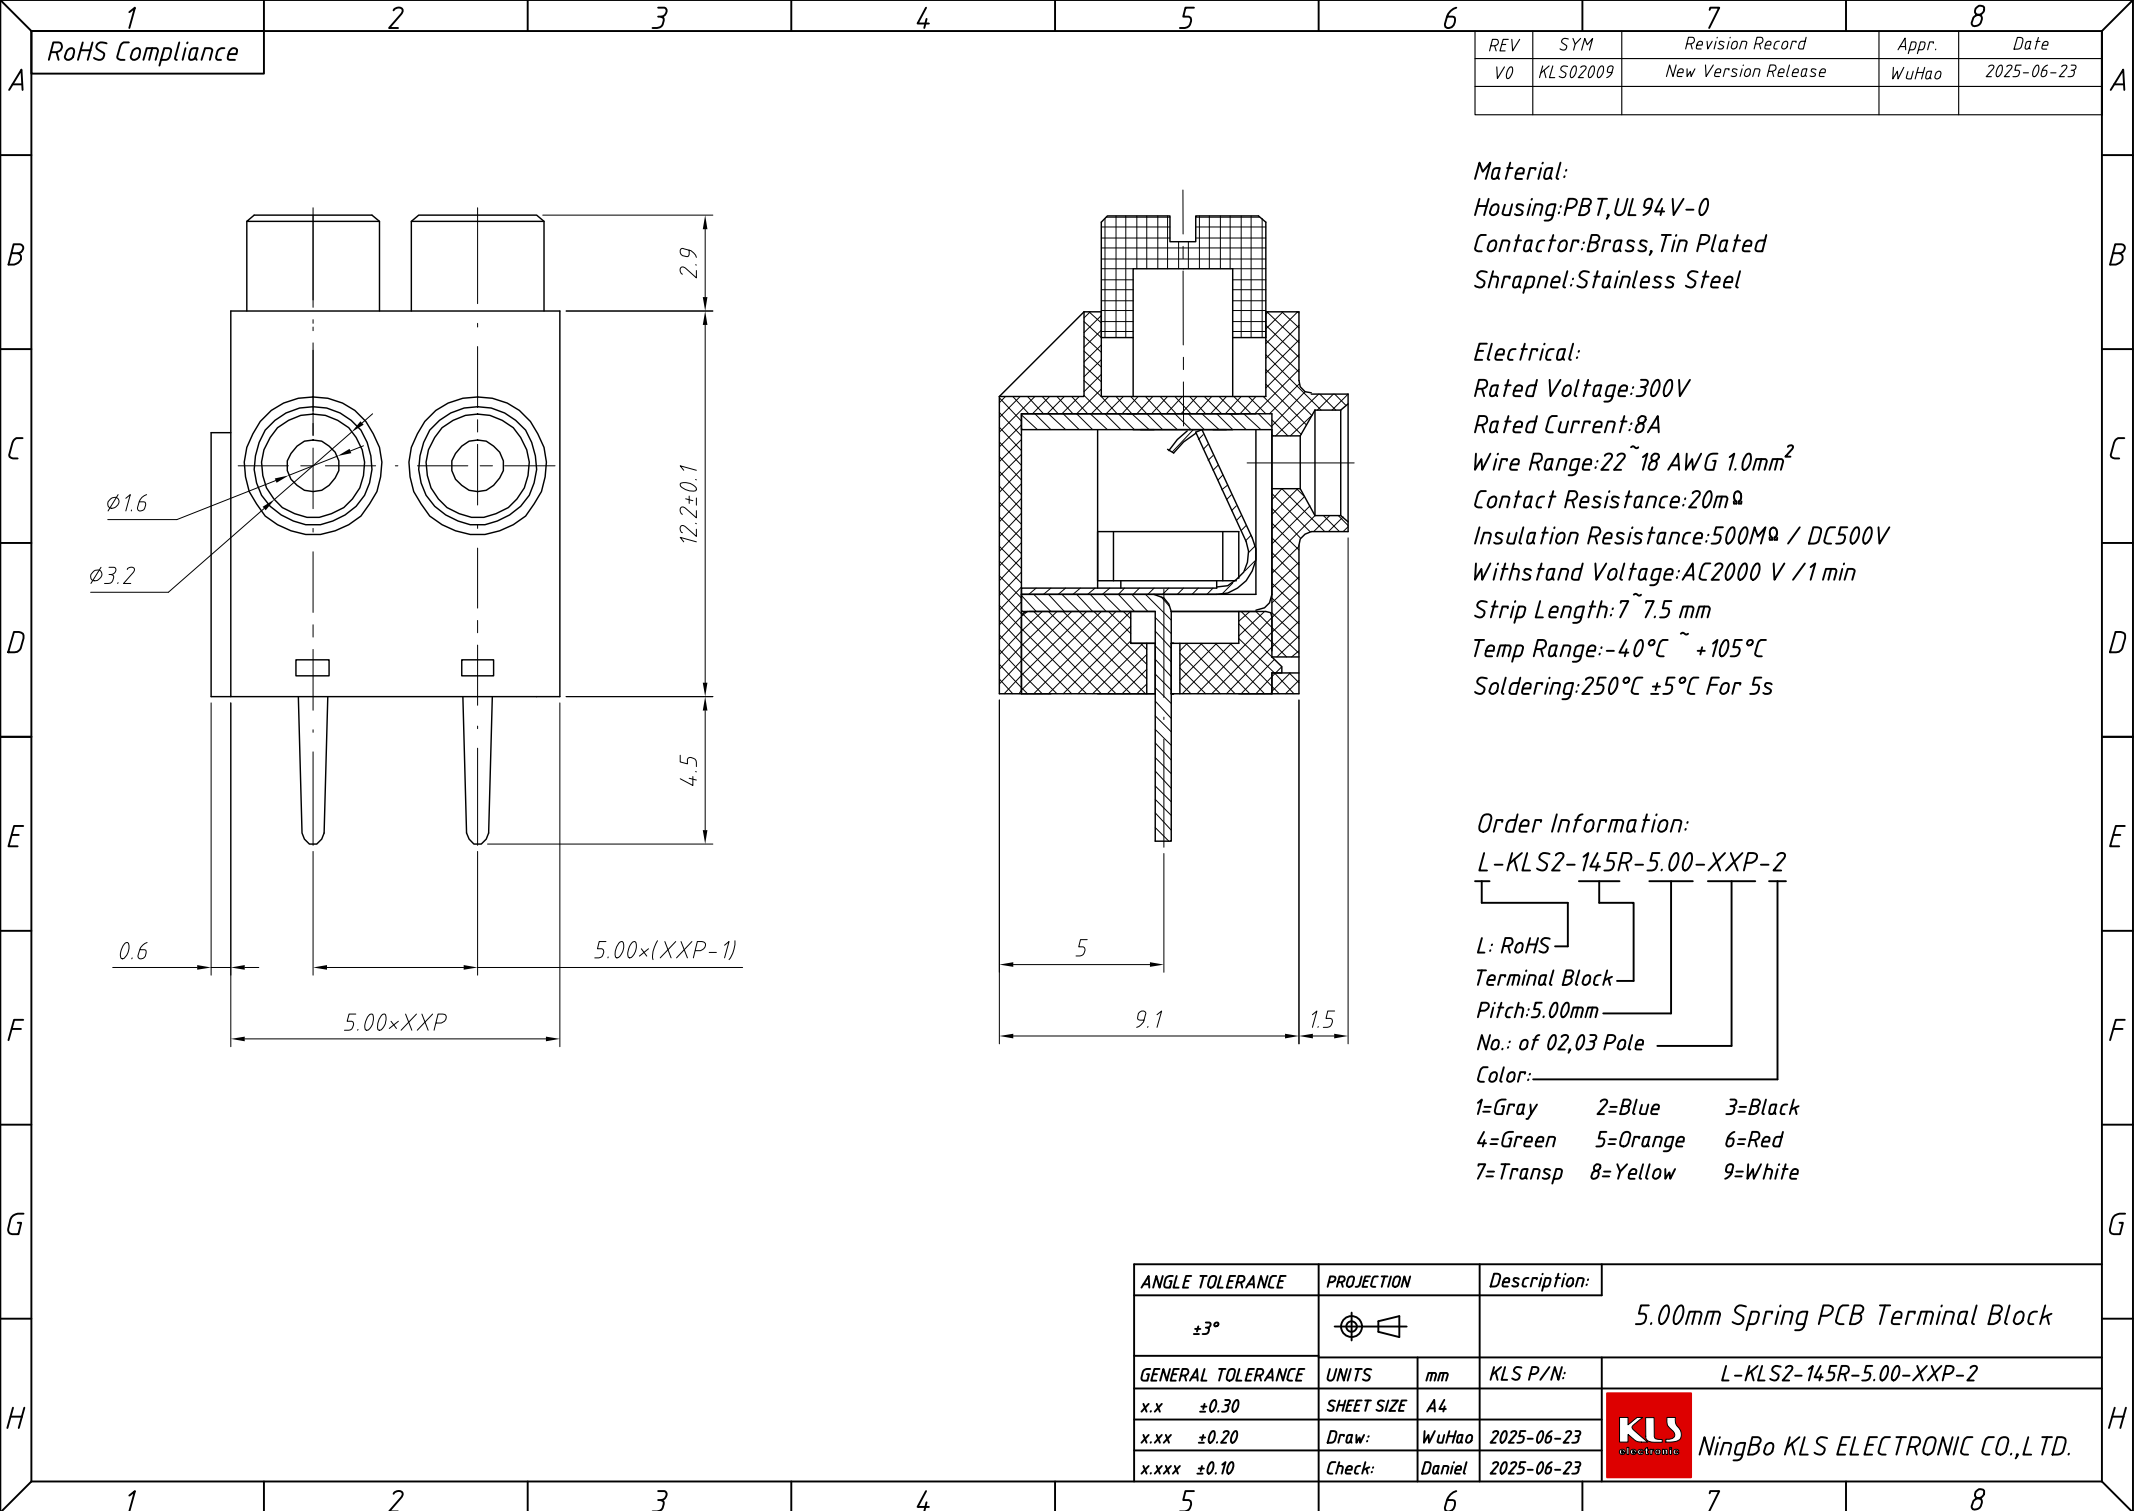

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS02009	New Version Release	WuHao	2025-06-23

Material:
Housing:PBT,UL 94 V-0
Contact:Brass,Tin Plated
Shrapnel:Stainless Steel

Electrical:
Rated Voltage:300V
Rated Current:8A
Wire Range:22~18 AWG 1.0mm²
Contact Resistance:20mΩ
Insulation Resistance:500MΩ / DC500V
Withstand Voltage:AC2000 V /1 min
Strip Length:7~7.5 mm
Temp Range:-40℃ ~ +105℃
Soldering:250℃ ±5℃ For 5s

Order Information:
L-KLS2-145R-5.00-XXP-2
L: RoHS
Terminal Block
Pitch:5.00mm
No.: of 02,03 Pole
Color:
1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8= Yellow 9=White

ANGLE TOLERANCE	PROJECTION	Description:
±3°		5.00mm Spring PCB Terminal Block
GENERAL TOLERANCE	UNITS	mm
x.x ±0.30	SHEET SIZE	A4
x.xx ±0.20	Draw:	WuHao 2025-06-23
x.xxx ±0.10	Check:	Daniel 2025-06-23

NingBo KLS ELECTRONIC CO.,L TD.