






1
RoHS Compliant

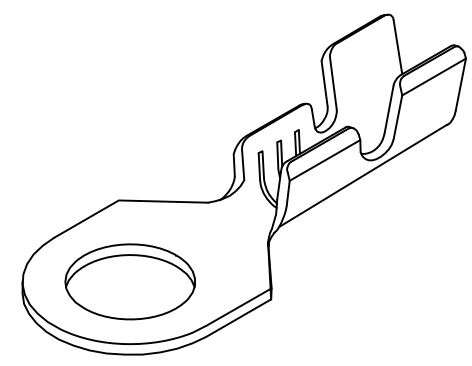

Note:
1. Appearance: Terminal cannot be corrected, scratched or oxidized
2. Material:
Brass C2680, T=0.50mm, Tin plating
3. Q'TY: 5000PCS/REEL
4. Wire Range: 18~20AWG

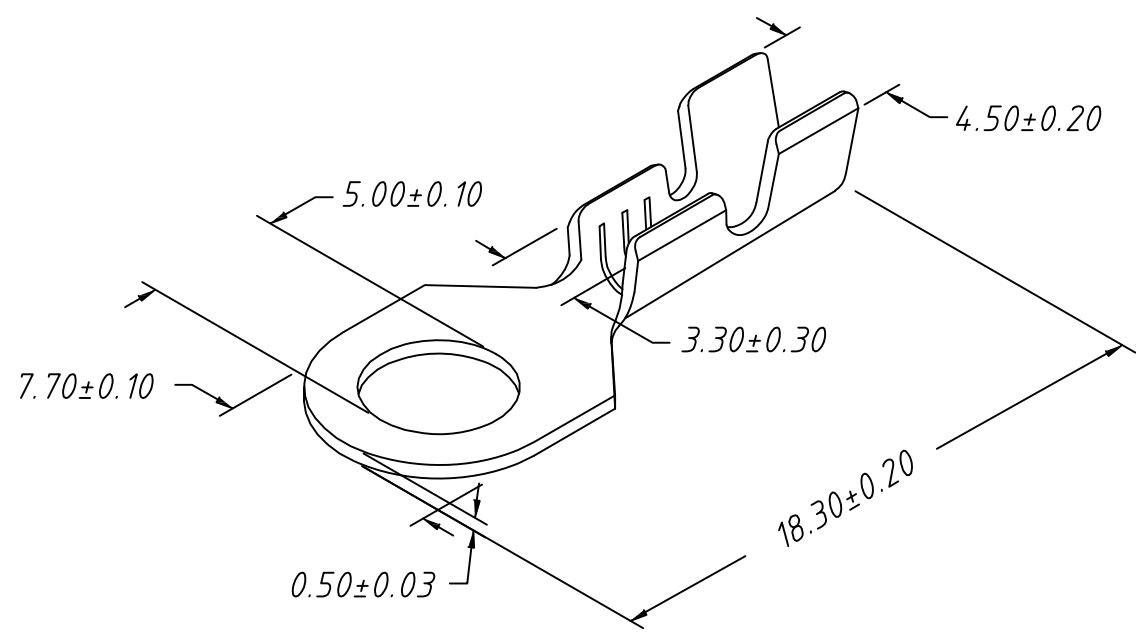


TOLERANCE		PROJECTION		Description:	Ø2.0mm Ring Non-insulated terminals	
0 - 3mm	±0.10	UNITS	mm			
3 - 6mm	±0.15	SHEET SIZE	A4			
6 - 10mm	±0.20	KLS P/N:		KLS8-RRD200501		
10 - 30mm	±0.25	 NingBo KLS ELECTRONIC CO.,L TD.				
Draw:	Daniel				ANGLE	±3°
Check:	Daniel				Data:	2019-04-10

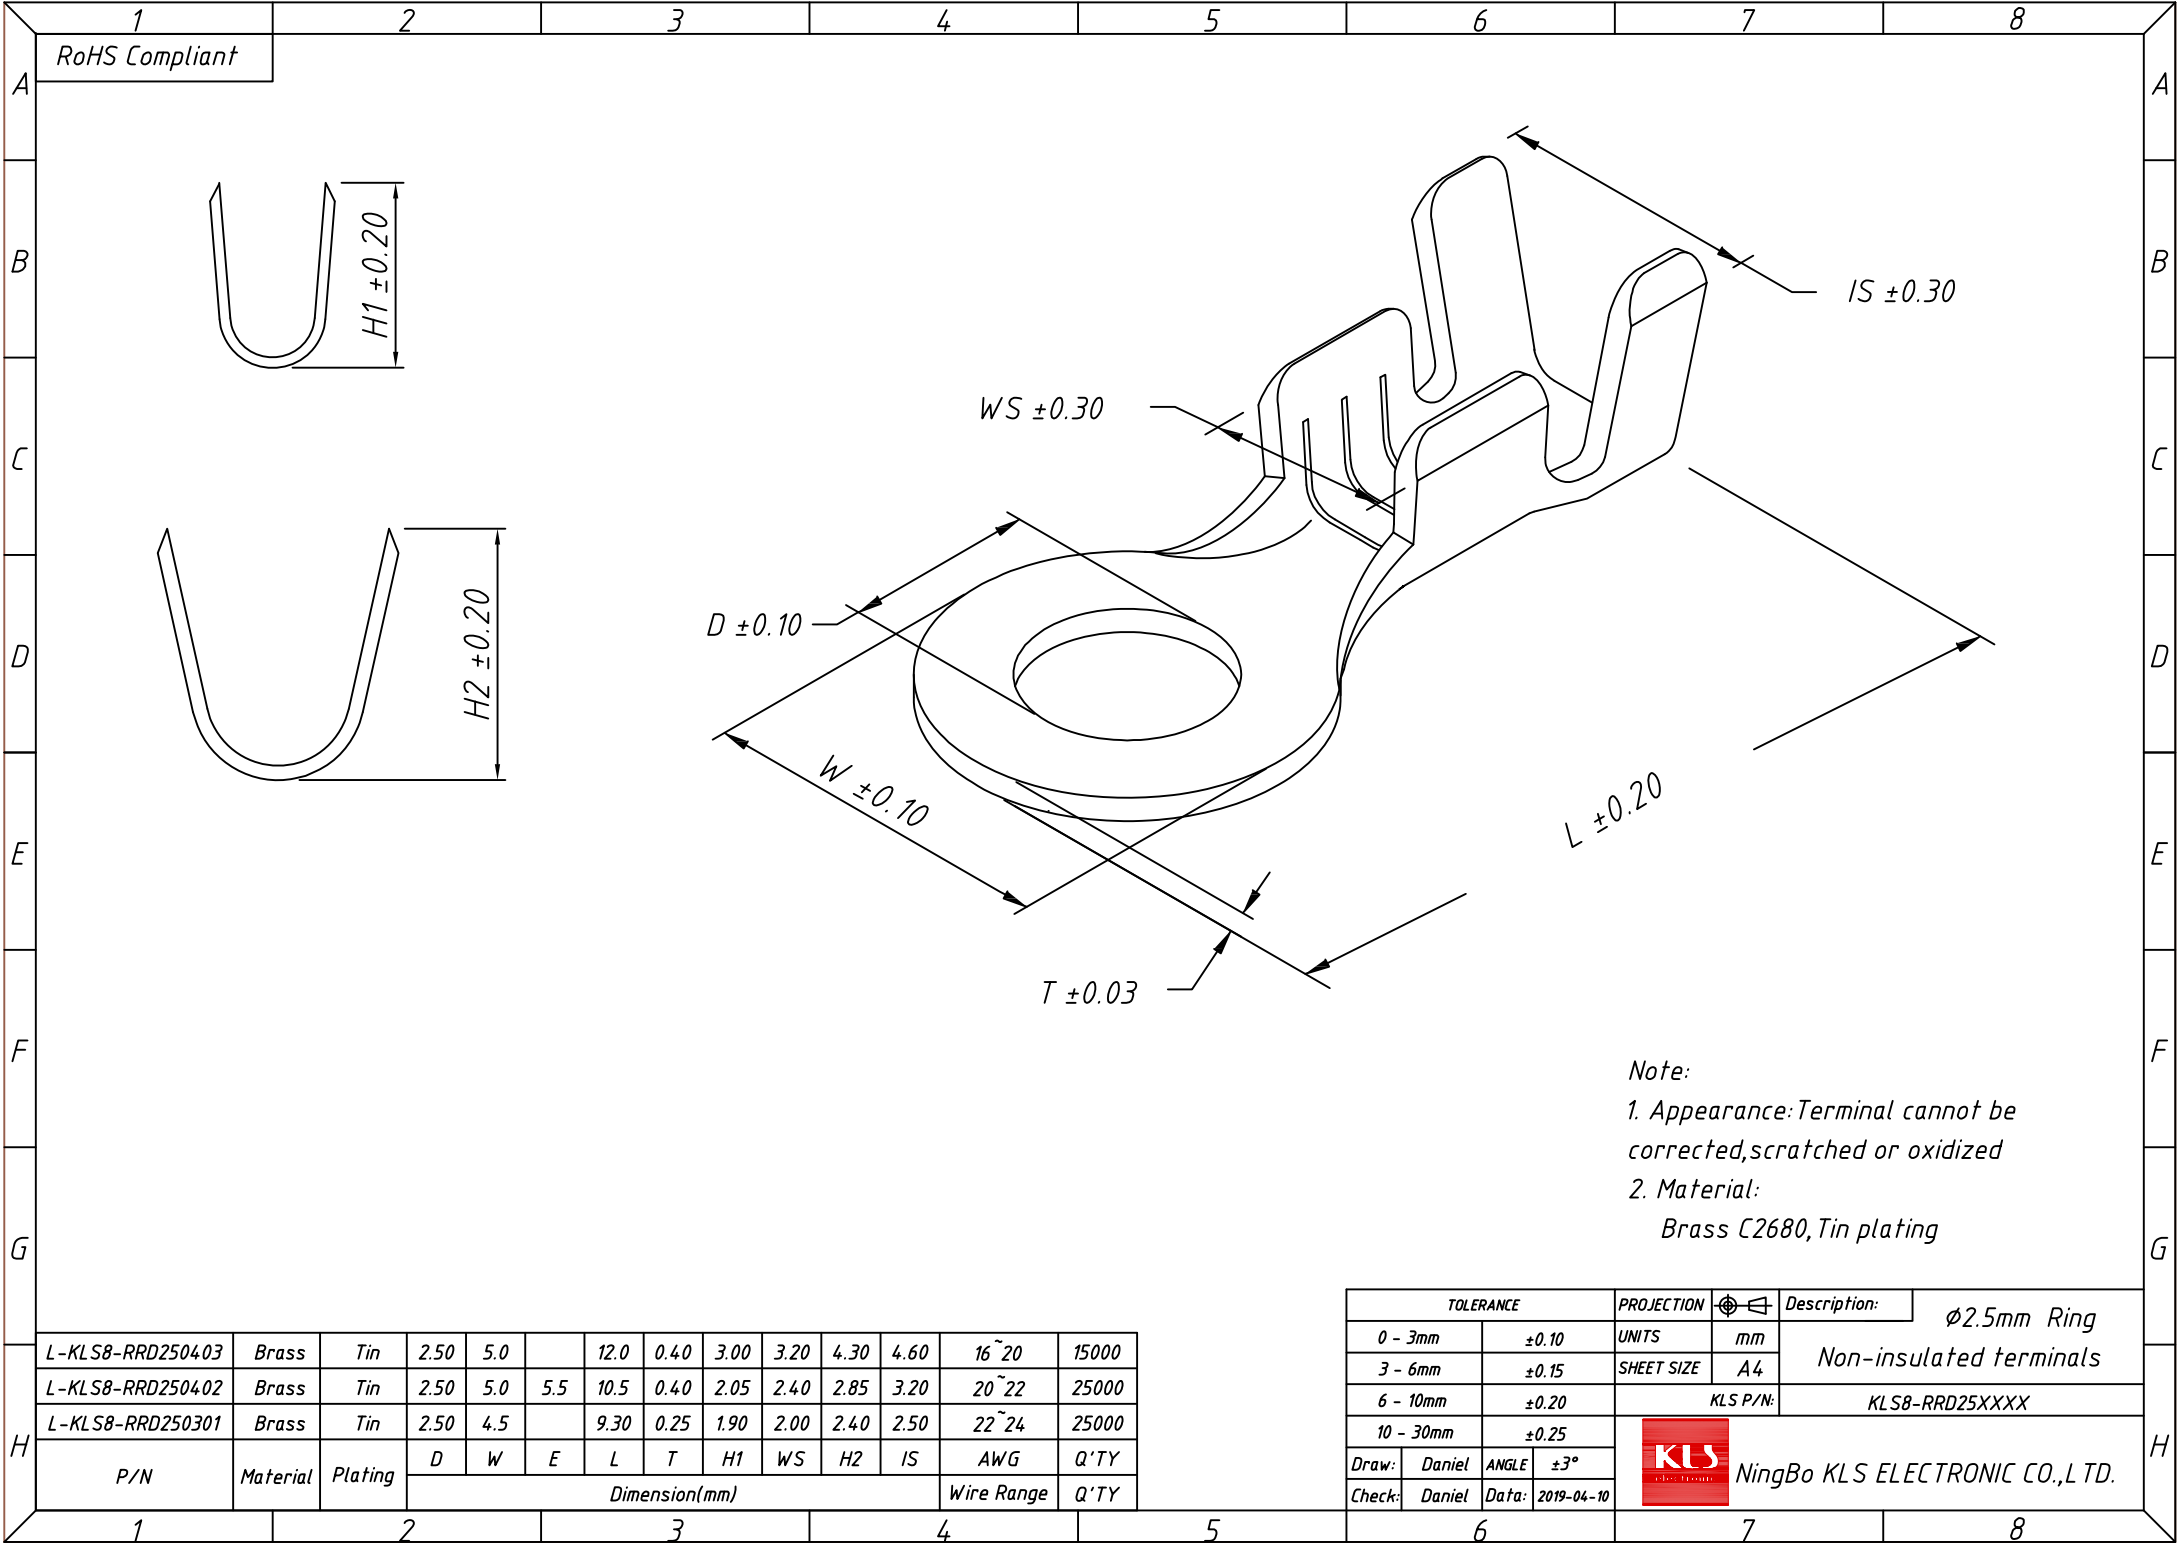



Note:
1. Appearance: Terminal cannot be corrected,scratched or oxidized
2. Material:
Brass C2680, Tin plating


L-KLS8-RRD250403	Brass	Tin	2.50	5.0		12.0	0.40	3.00	3.20	4.30	4.60	16~20	15000
L-KLS8-RRD250402	Brass	Tin	2.50	5.0	5.5	10.5	0.40	2.05	2.40	2.85	3.20	20~22	25000
L-KLS8-RRD250301	Brass	Tin	2.50	4.5		9.30	0.25	1.90	2.00	2.40	2.50	22~24	25000
P/N	Material	Plating	D	W	E	L	T	H1	WS	H2	IS	AWG	Q'TY
			Dimension(mm)									Wire Range	Q'TY


TOLERANCE			PROJECTION		Description:	
0 - 3mm	±0.10		UNITS	mm	ø2.5mm Ring Non-insulated terminals	
3 - 6mm	±0.15		SHEET SIZE	A4		
6 - 10mm	±0.20		KLS P/N:		KLS8-RRD25XXXX	
10 - 30mm	±0.25					
Draw:	Daniel	ANGLE				±3°
Check:	Daniel	Data:				2019-04-10
			NingBo KLS ELECTRONIC CO.,L TD.			

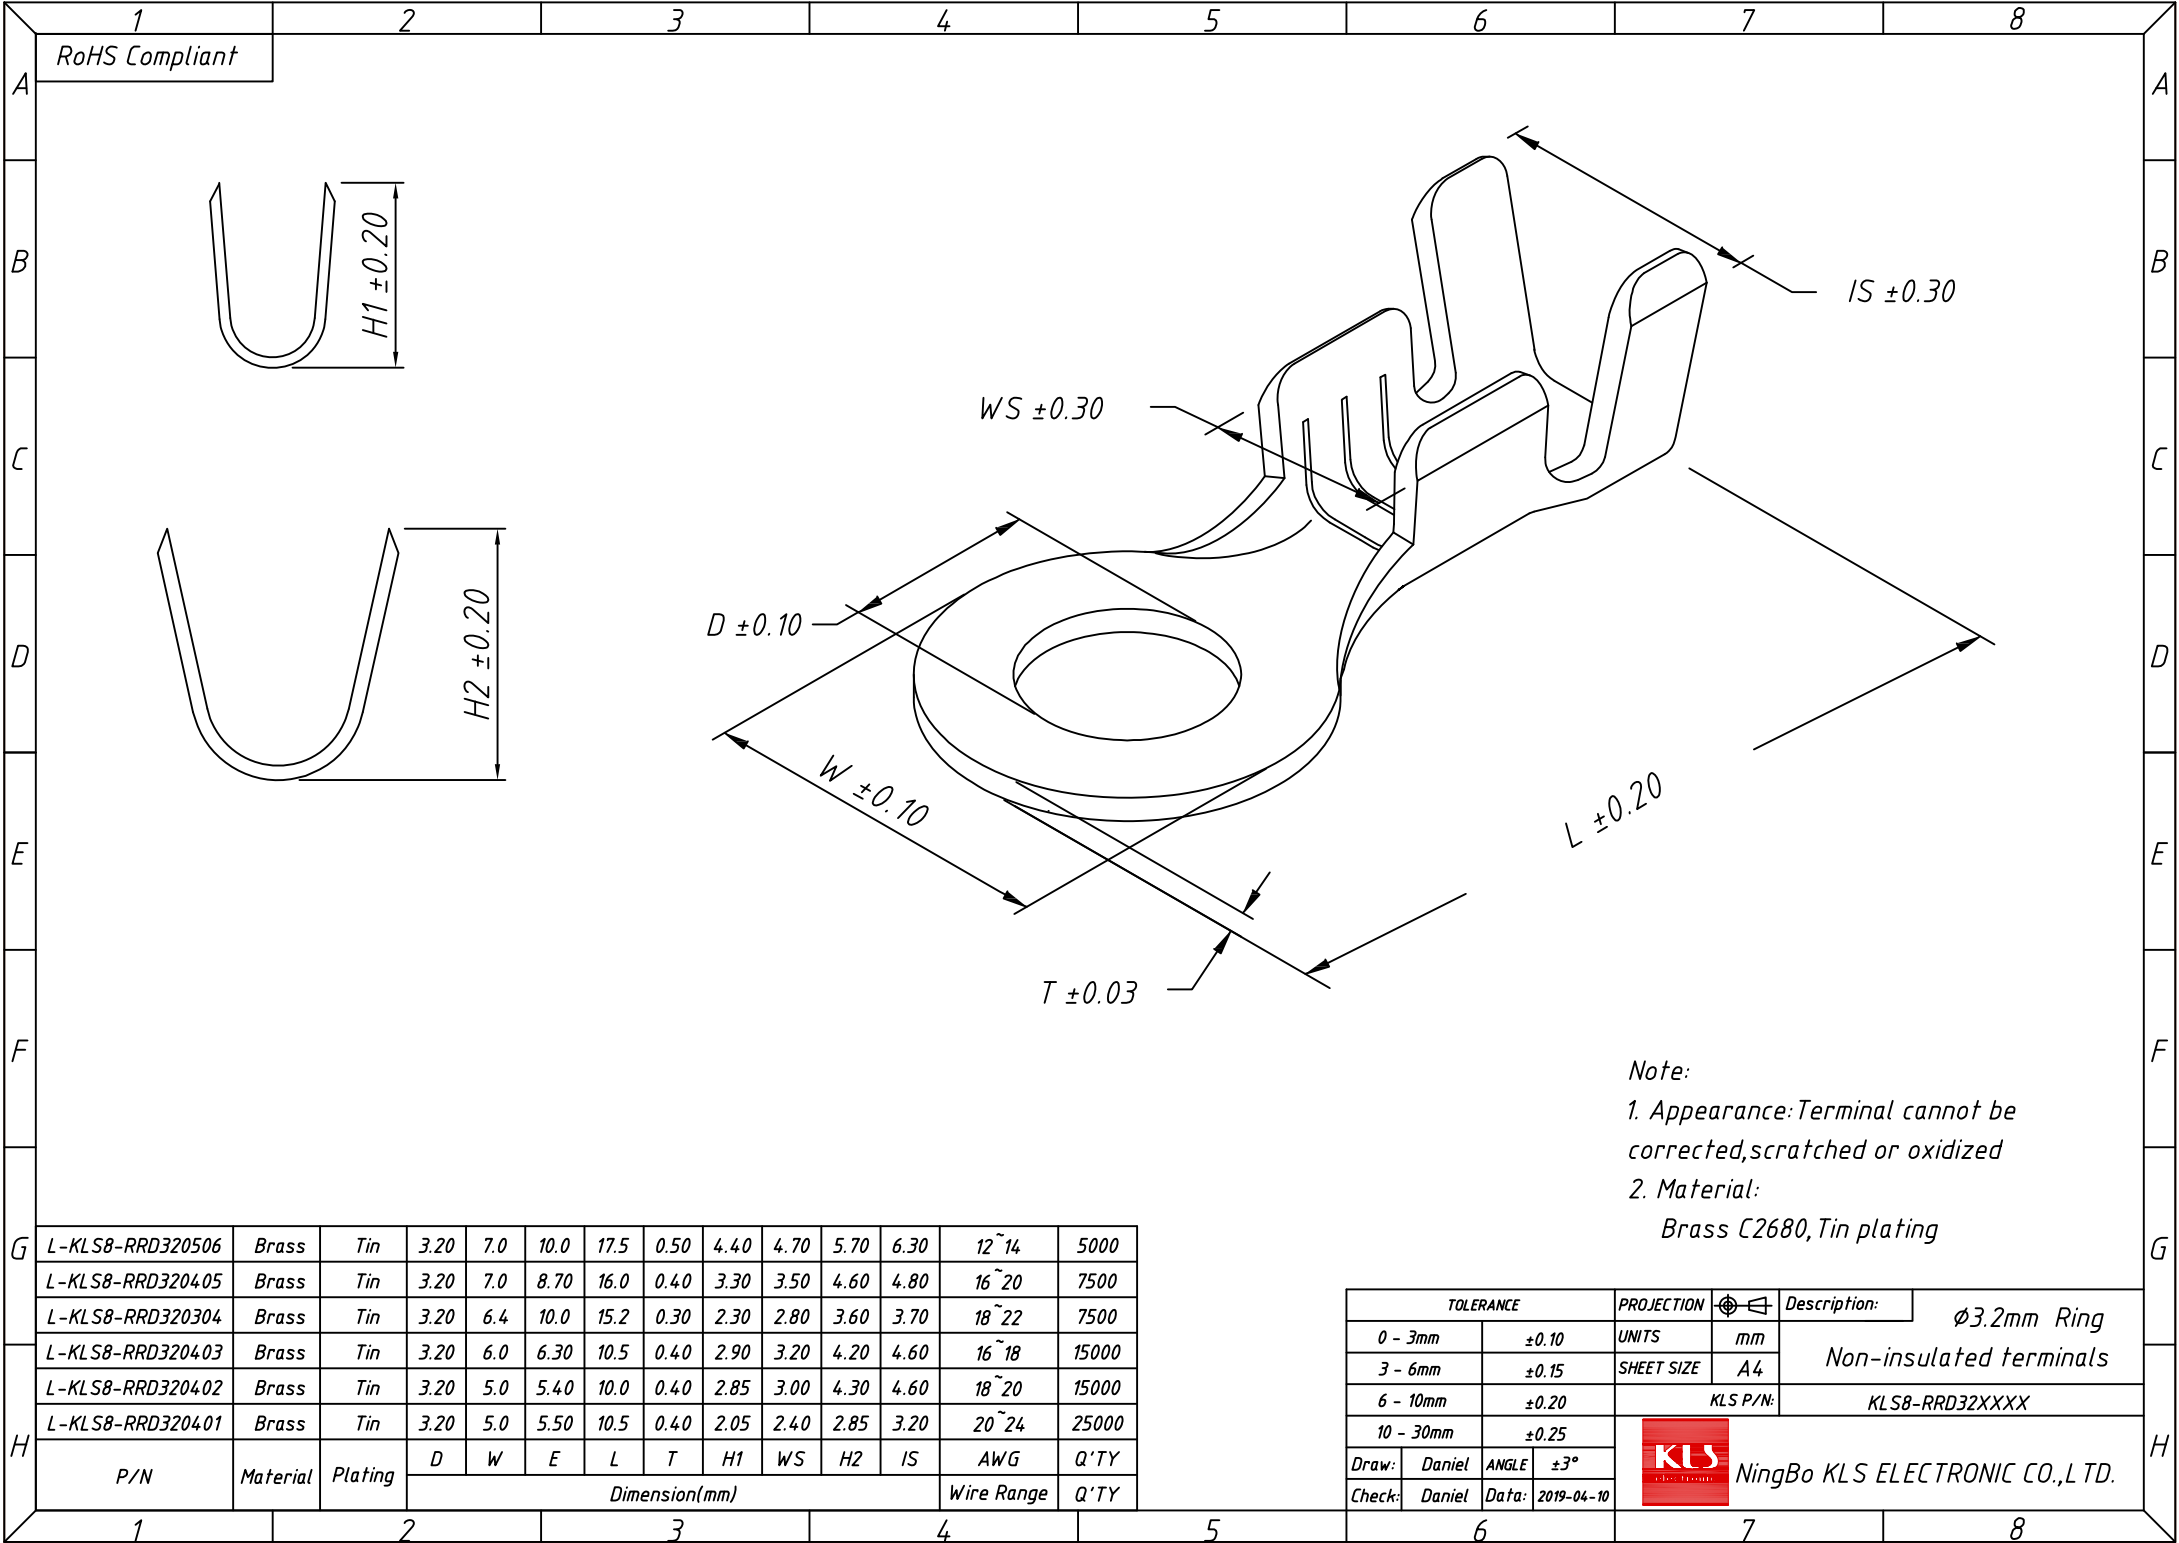


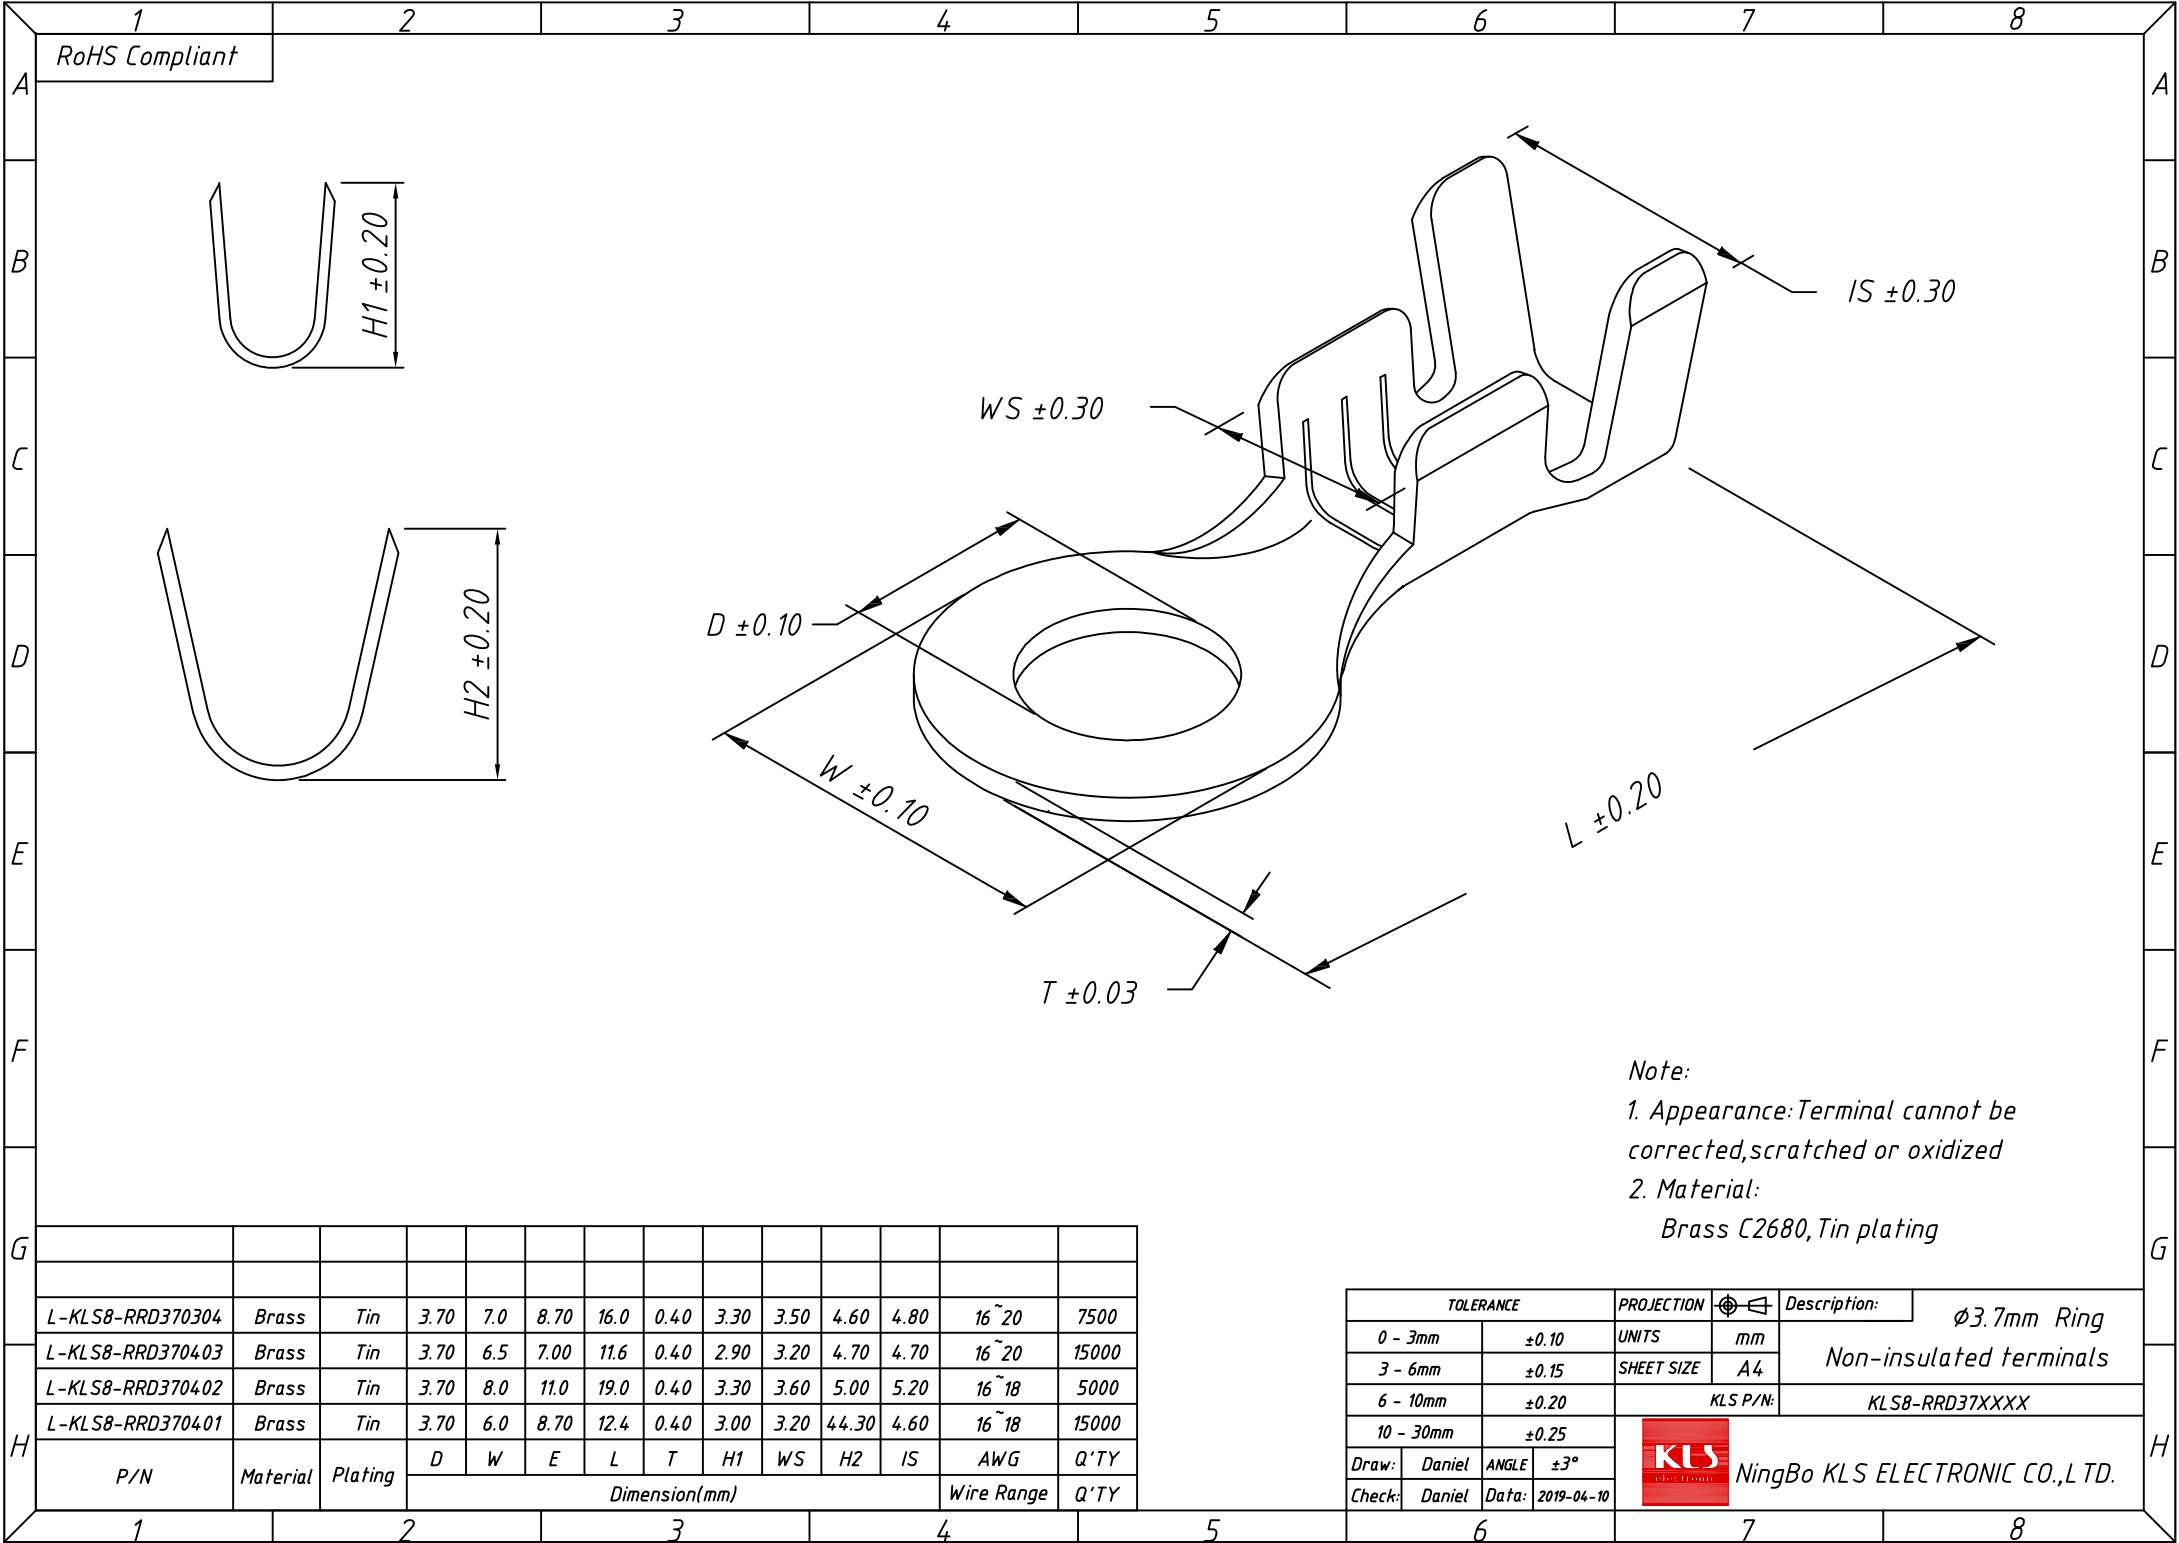


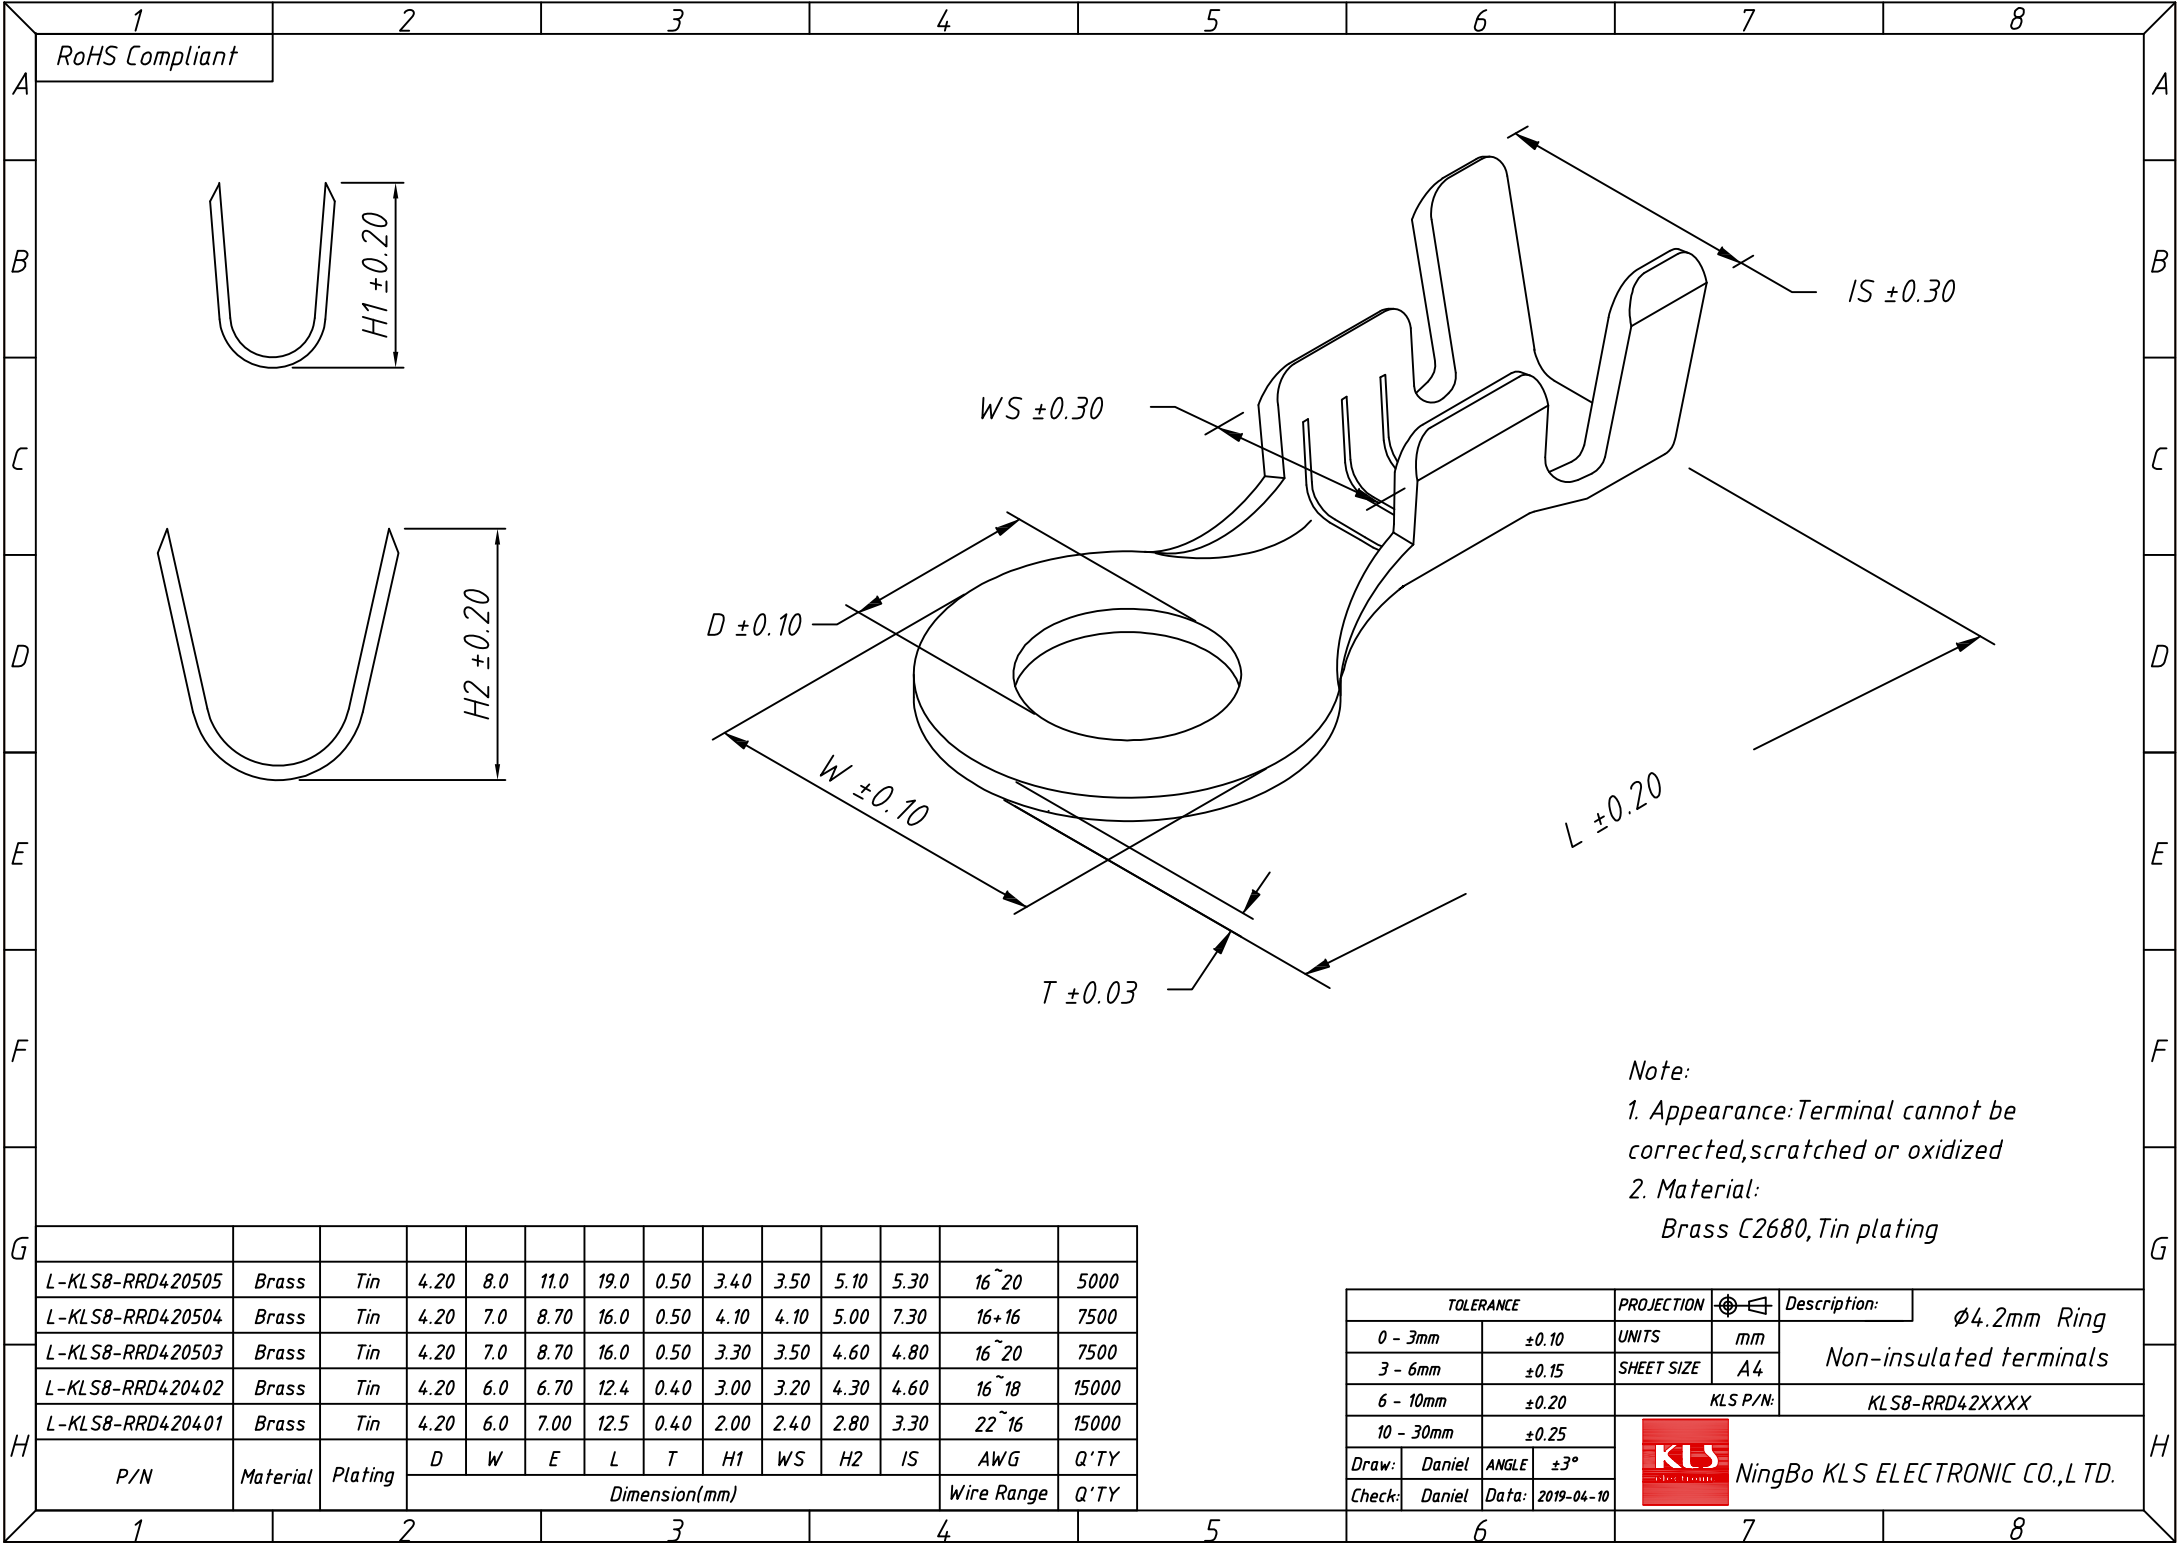

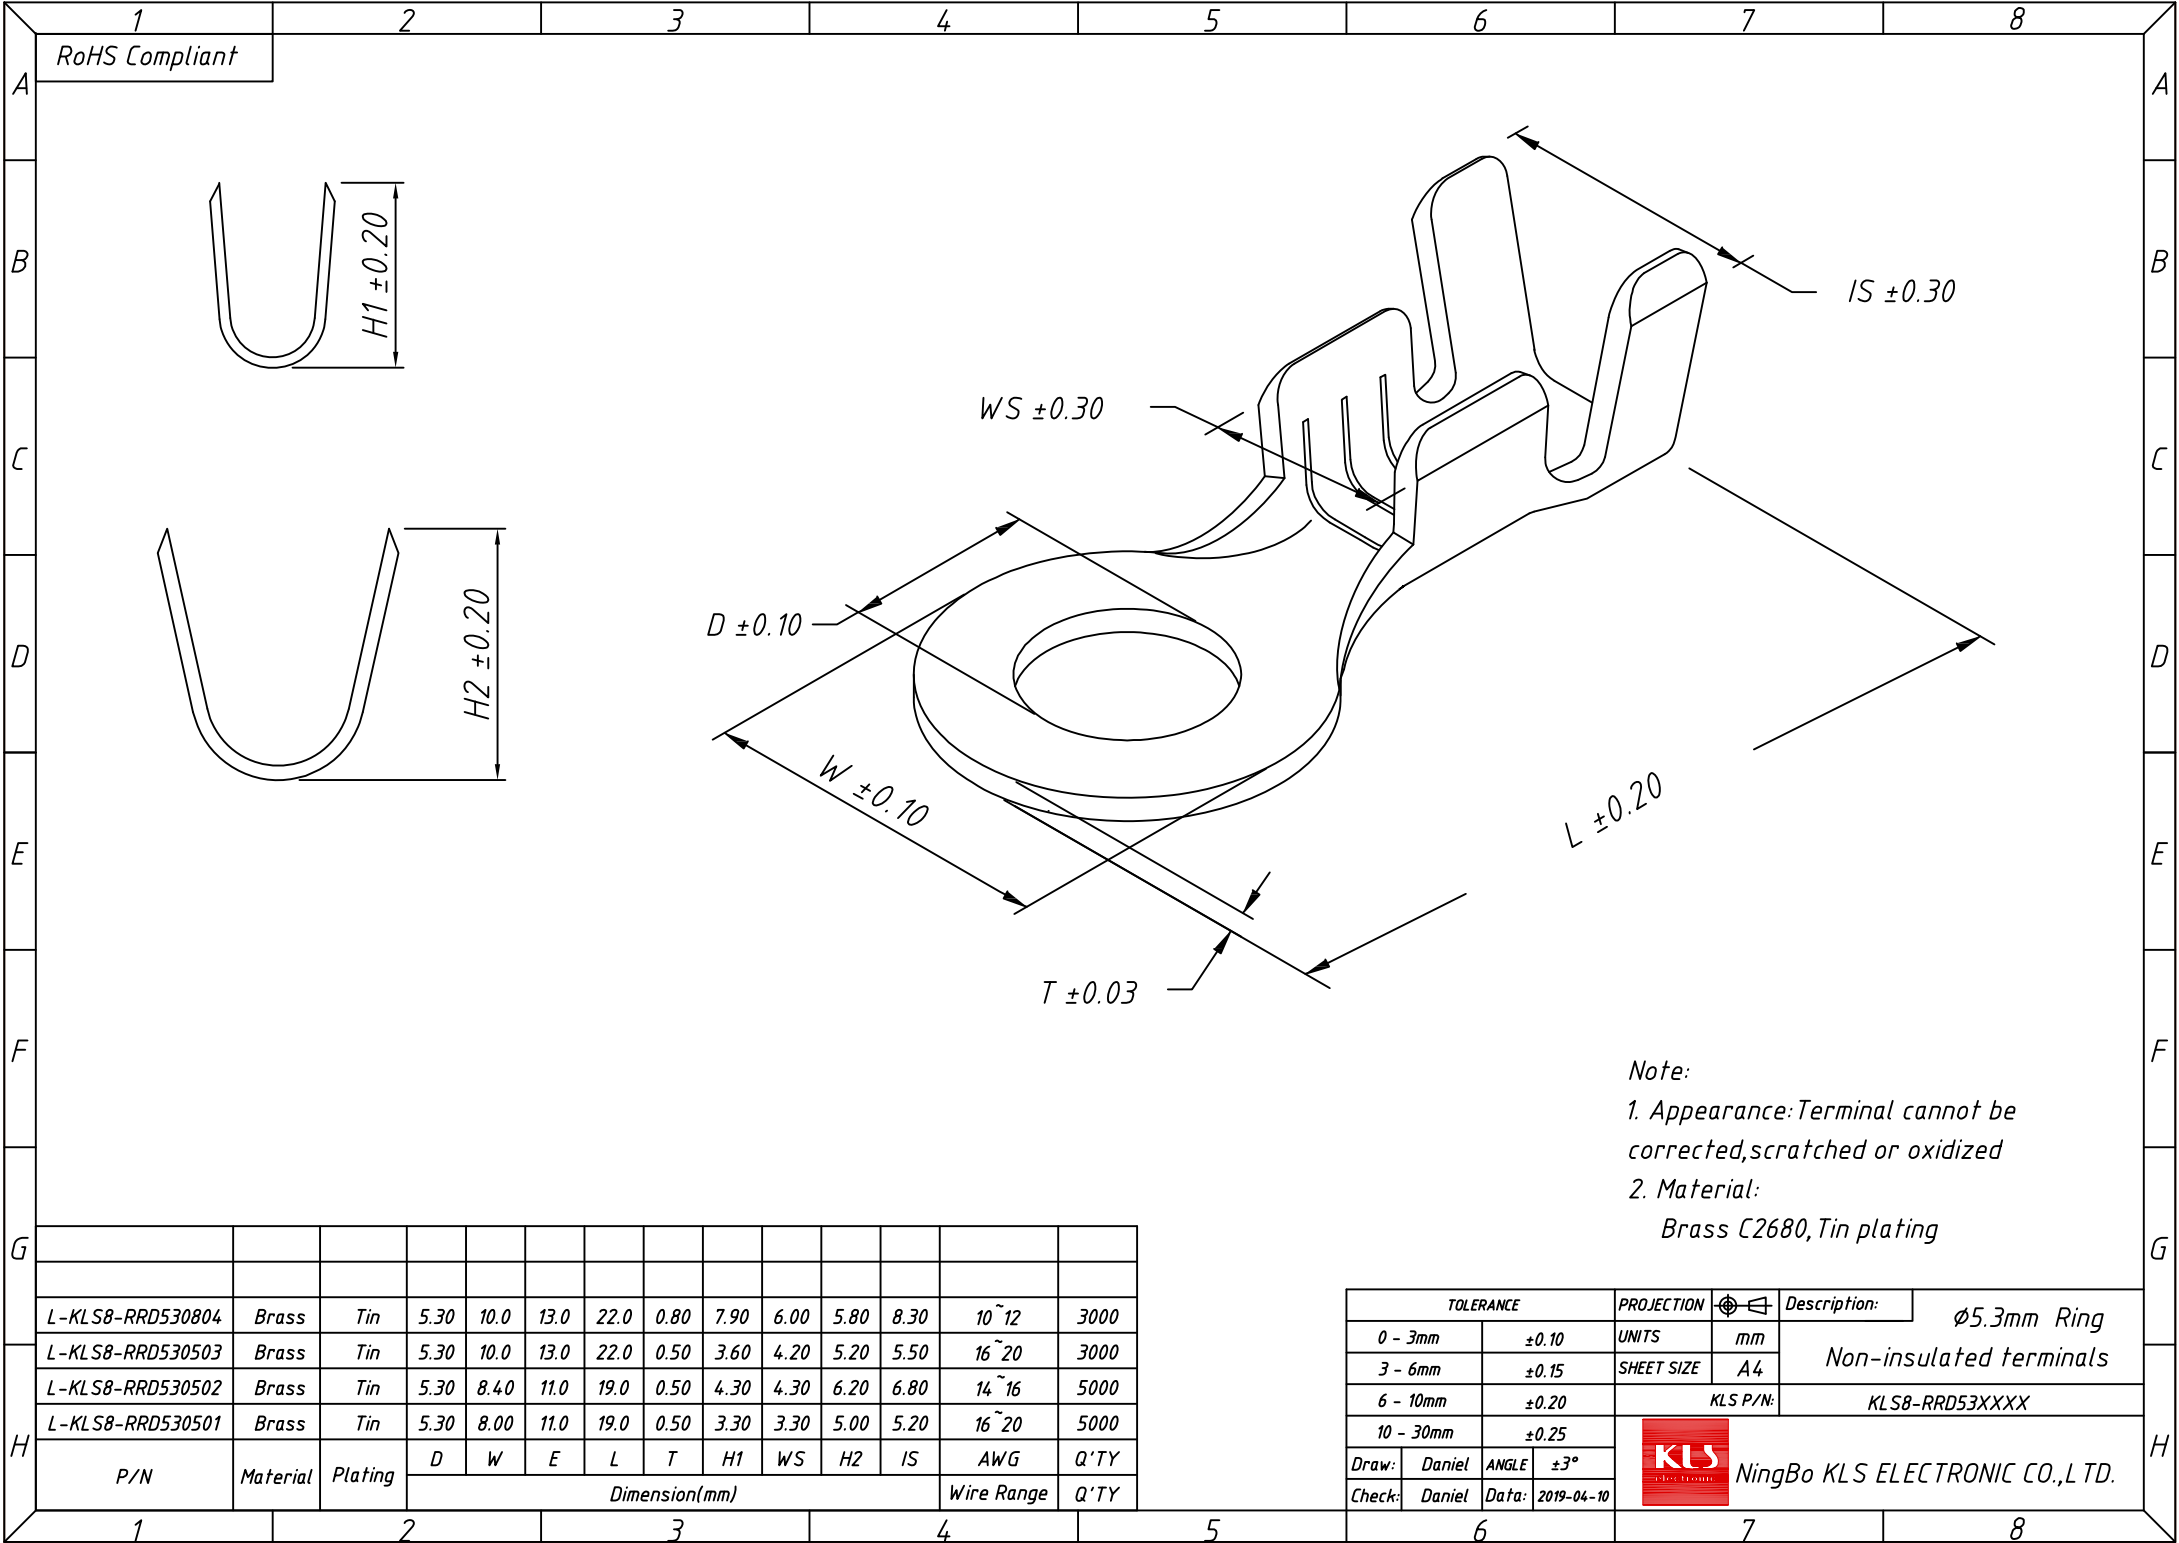


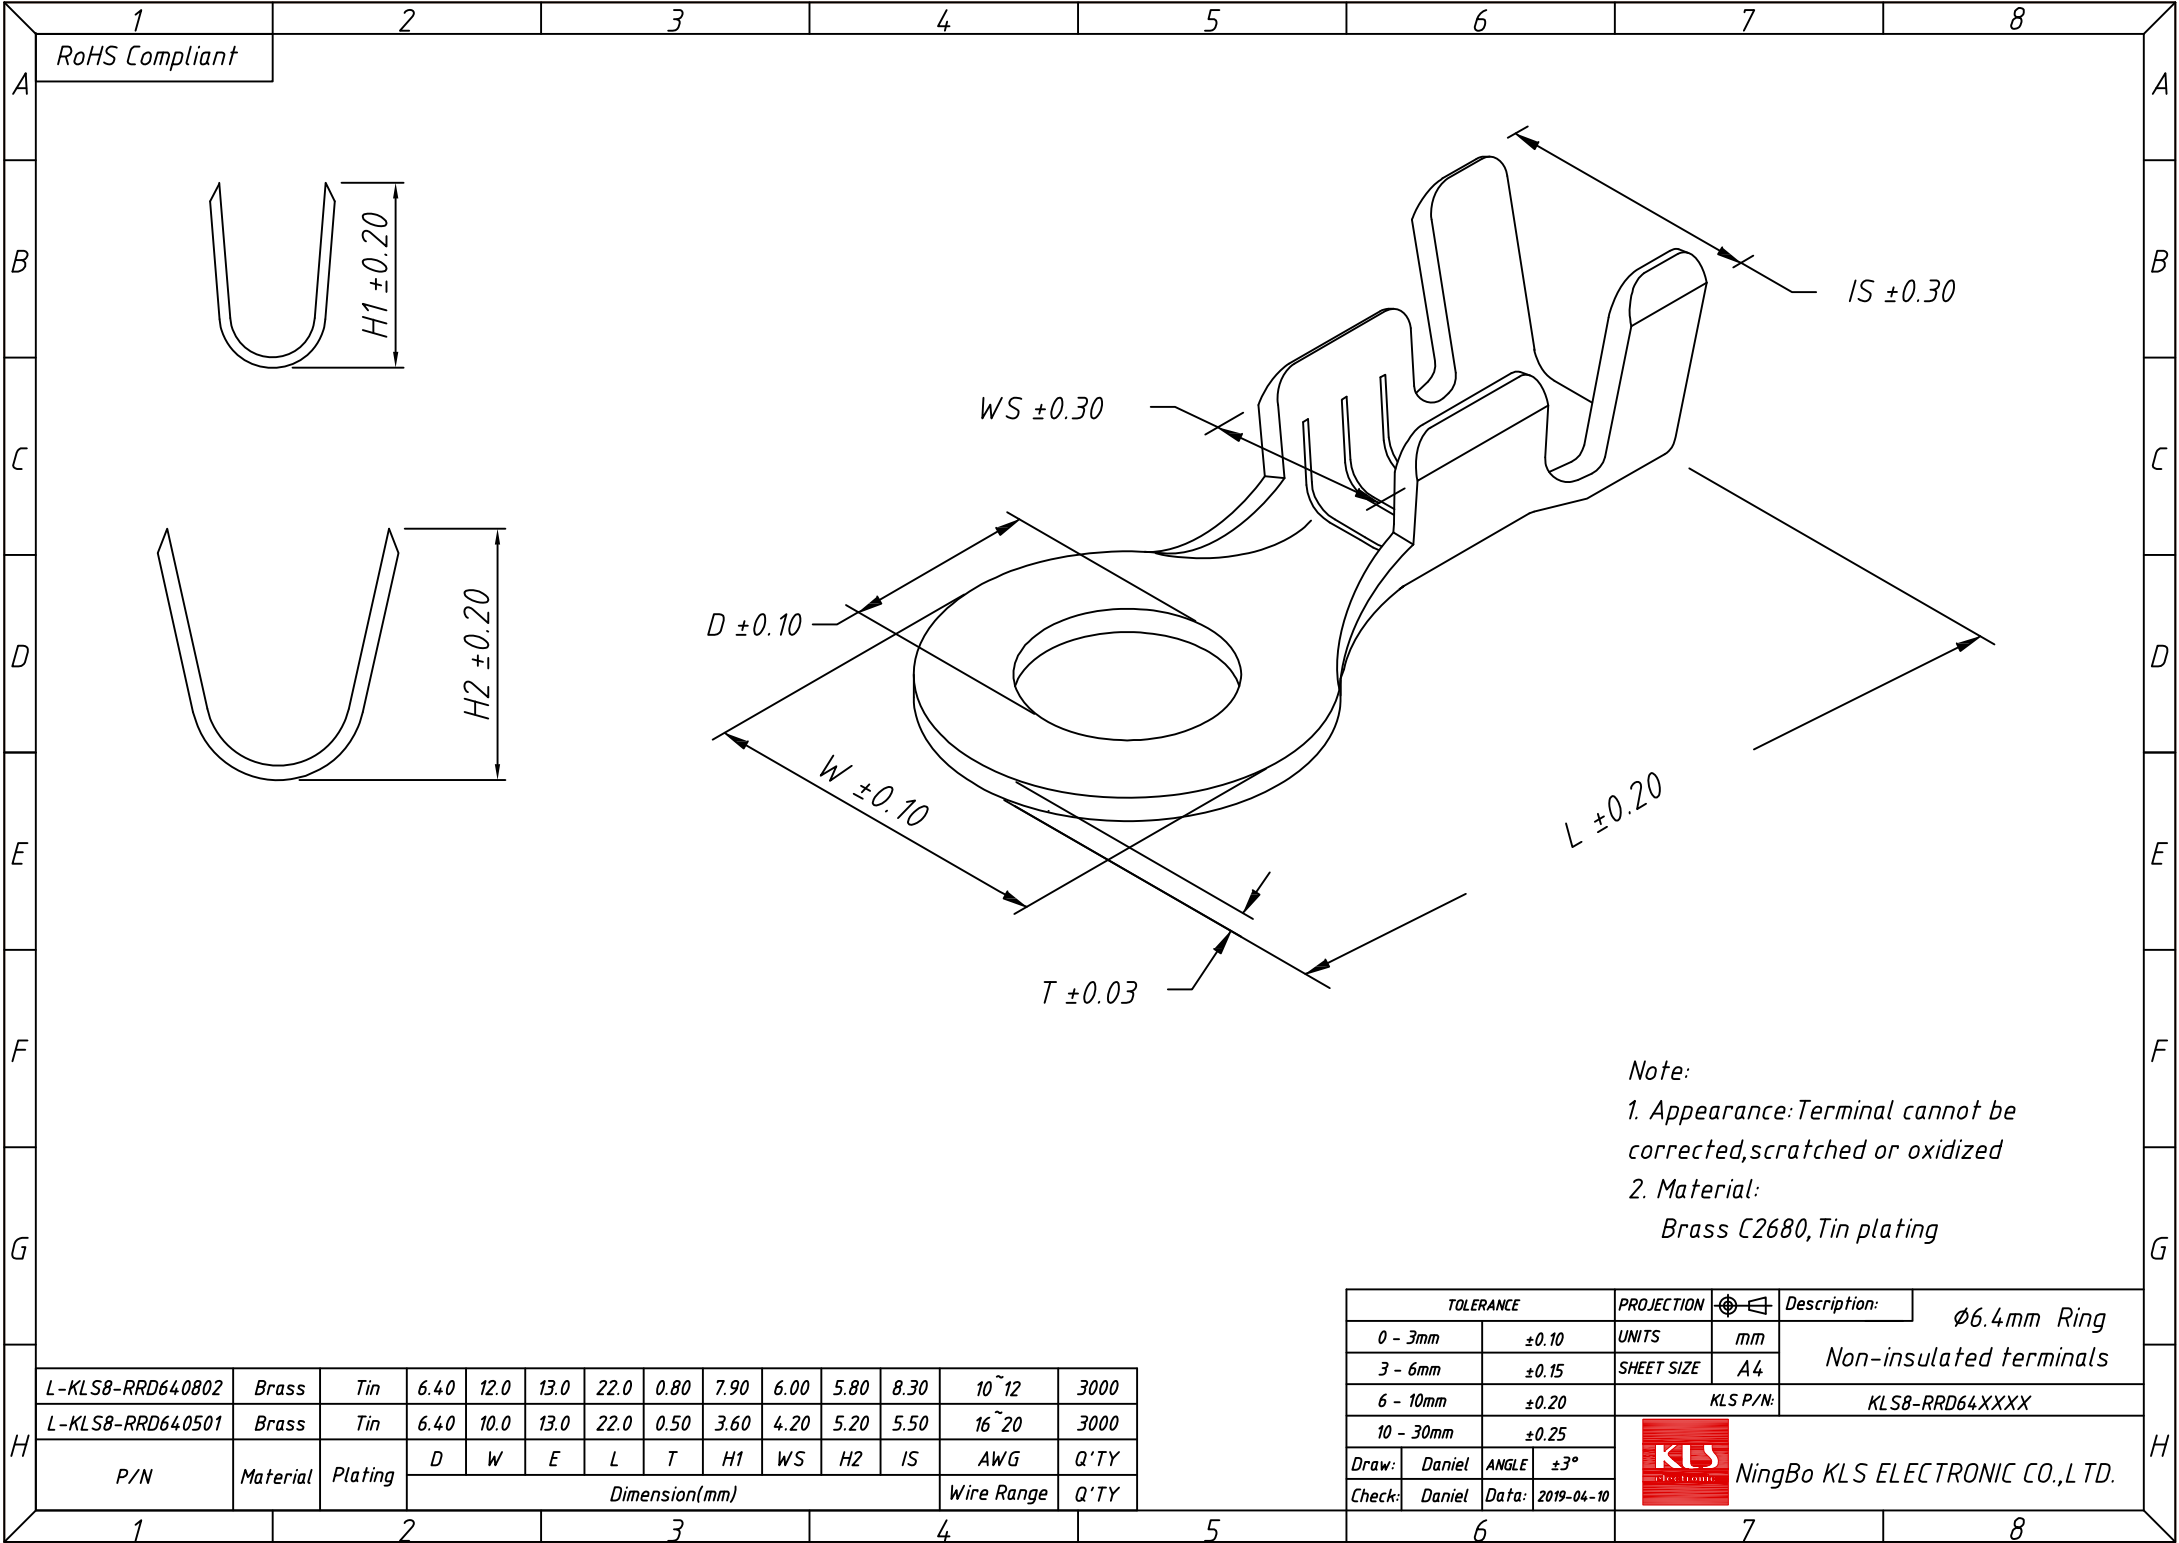

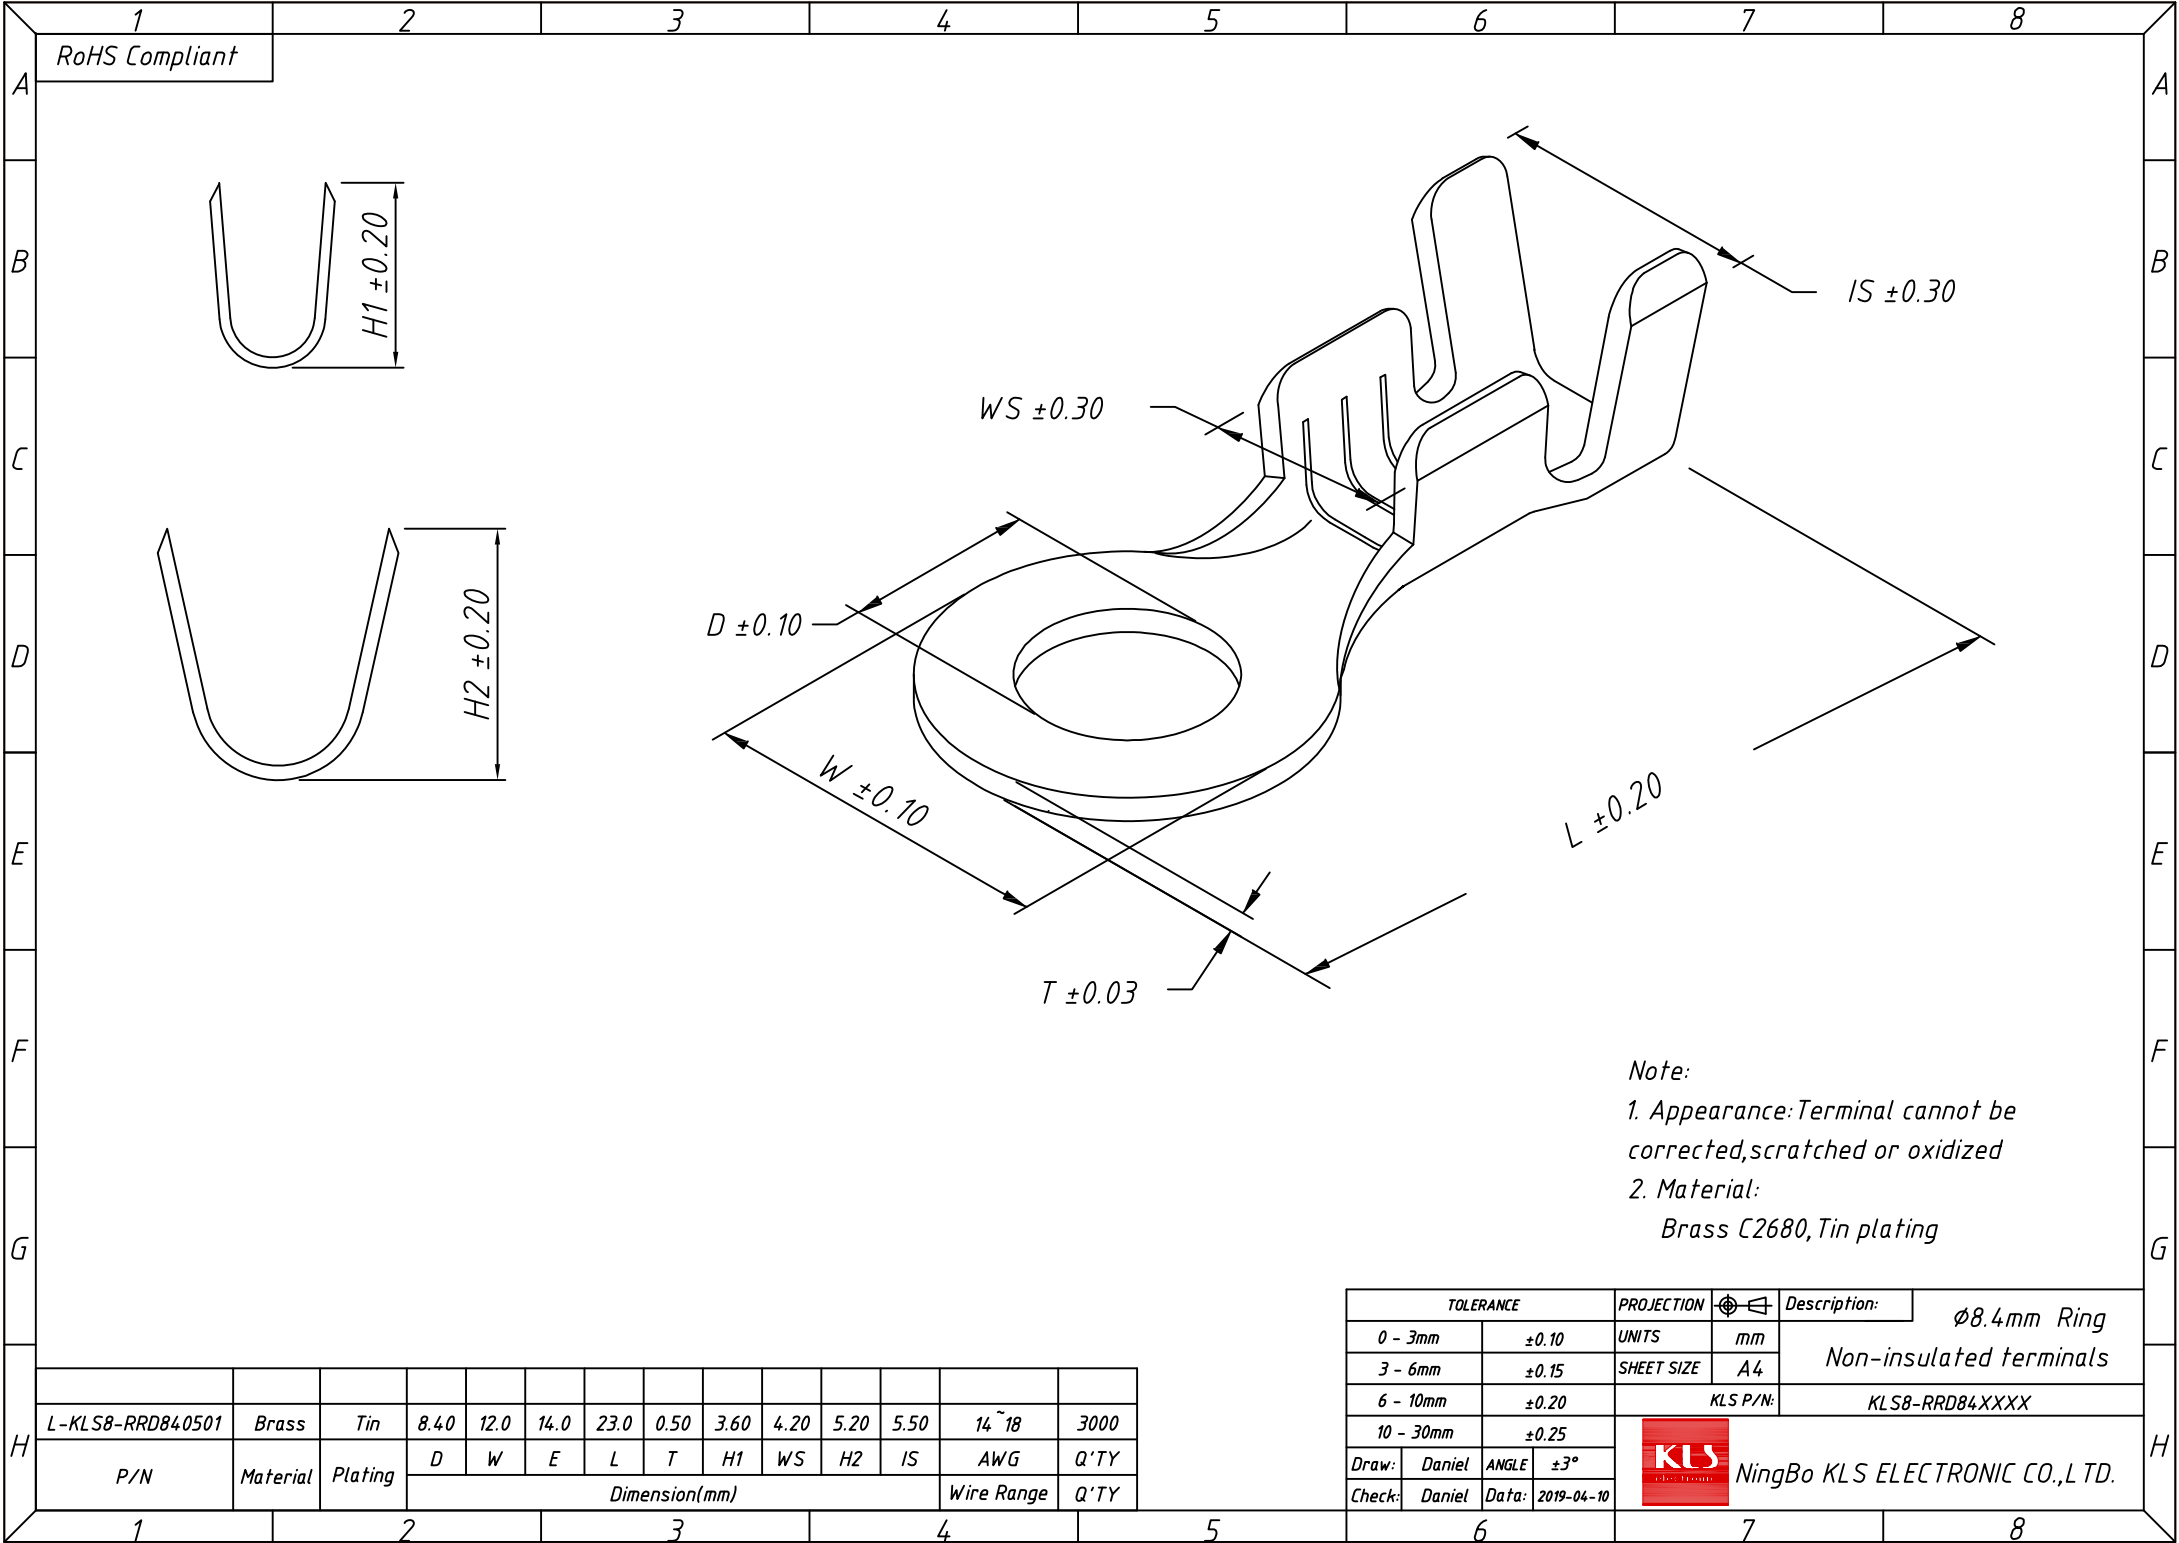


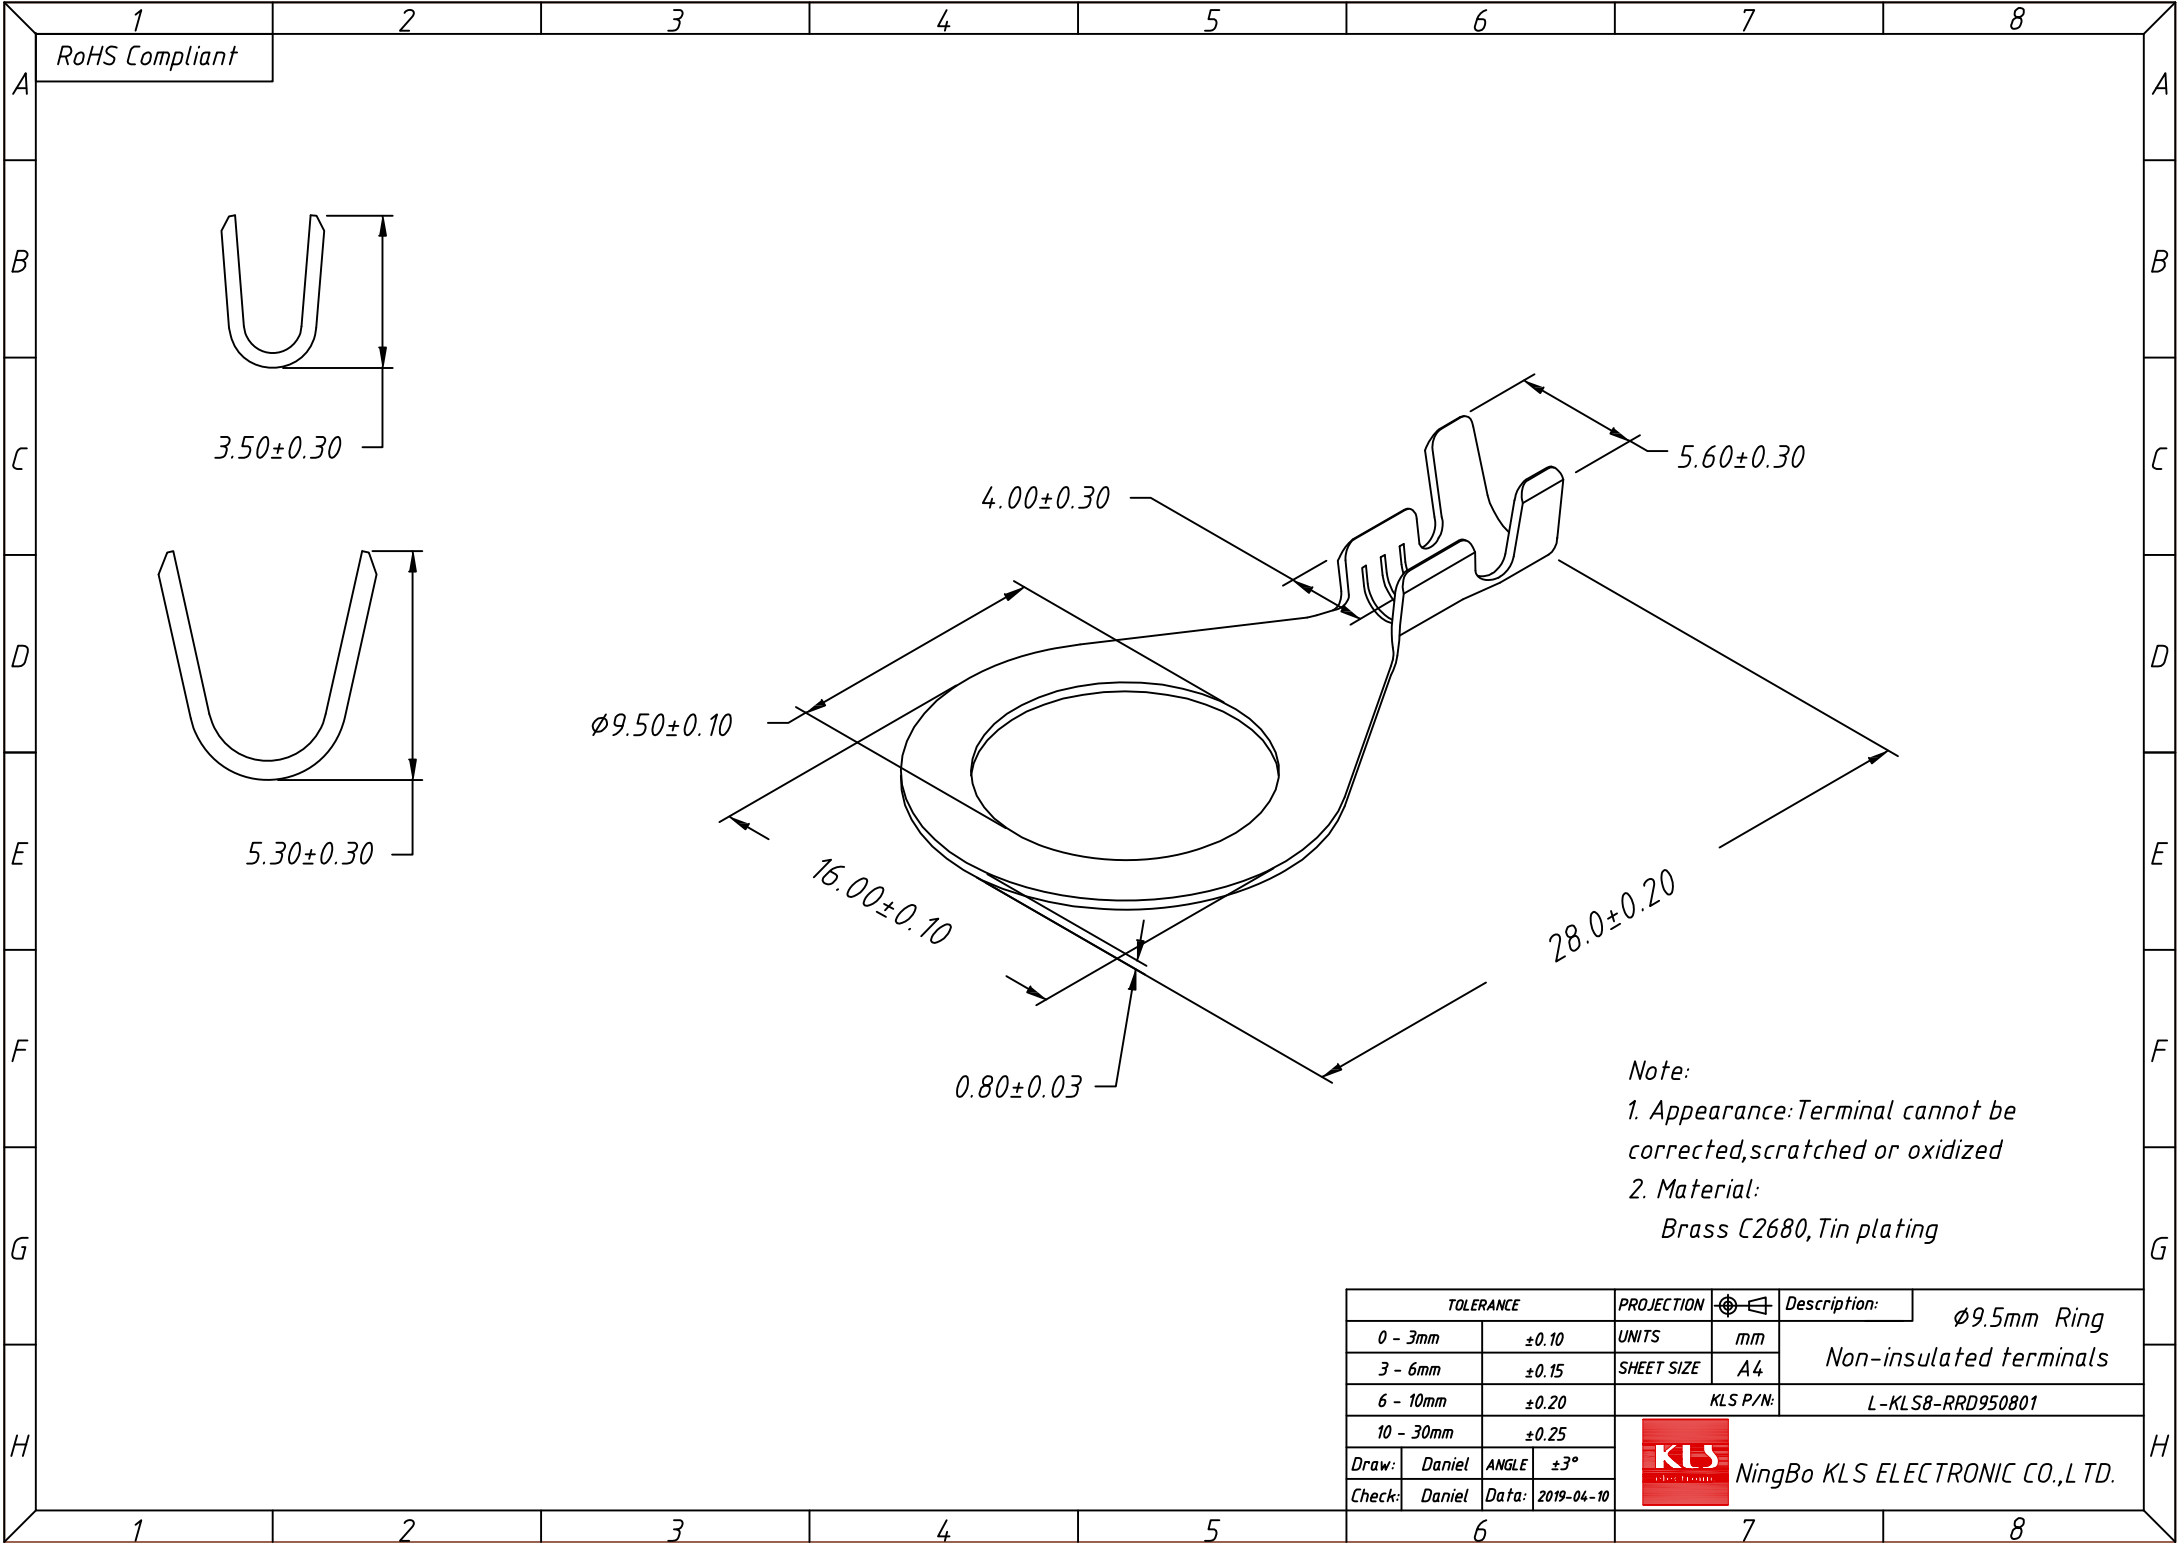

TOLERANCE			PROJECTION		Description:
0 - 3mm	±0.10		UNITS	mm	ø9.5mm Ring Non-insulated terminals
3 - 6mm	±0.15		SHEET SIZE	A4	
6 - 10mm	±0.20		KLS P/N:		L-KLS8-RRD950801
10 - 30mm	±0.25		 NingBo KLS ELECTRONIC CO.,L TD.		
Draw:	Daniel	ANGLE ±3°			
Check:	Daniel	Data: 2019-04-10			
6			7		8

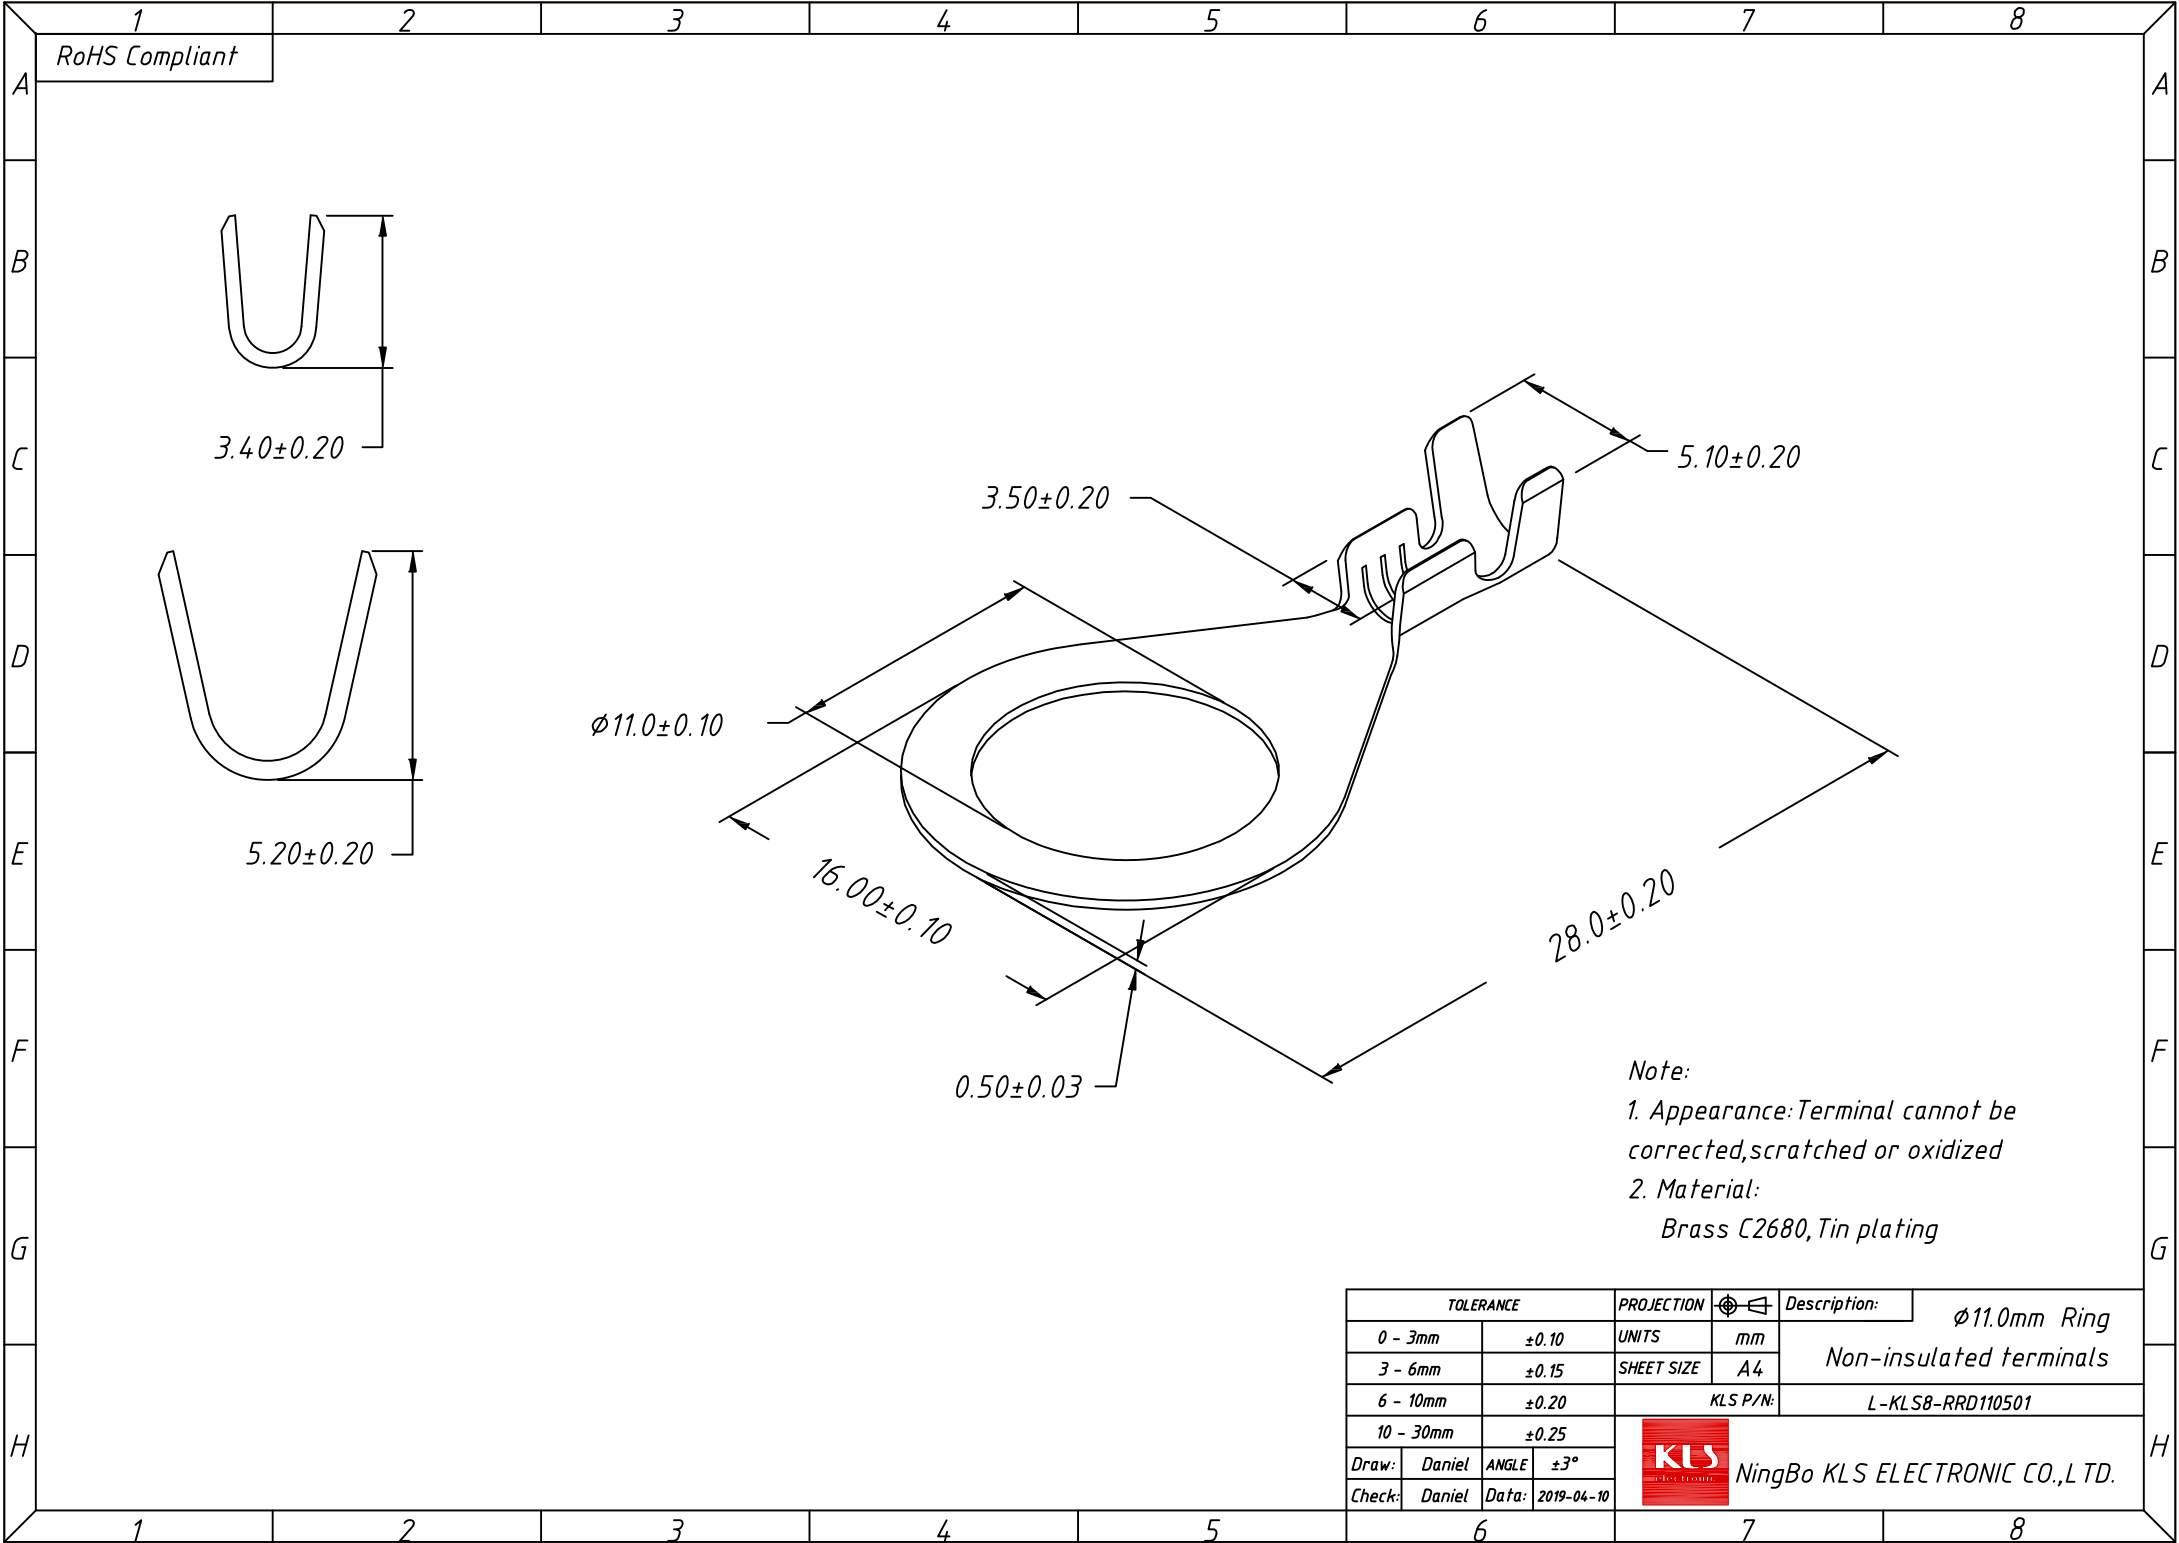


TOLERANCE		PROJECTION		Description:
0 - 3mm	±0.10	UNITS	mm	
3 - 6mm	±0.15	SHEET SIZE	A4	ø11.0mm Ring Non-insulated terminals
6 - 10mm	±0.20	KLS P/N:		
10 - 30mm	±0.25			L-KLS8-RRD110501
Draw:	Daniel	ANGLE	±3°	 NingBo KLS ELECTRONIC CO.,L TD.
Check:	Daniel	Data:	2019-04-10	
6		7		8

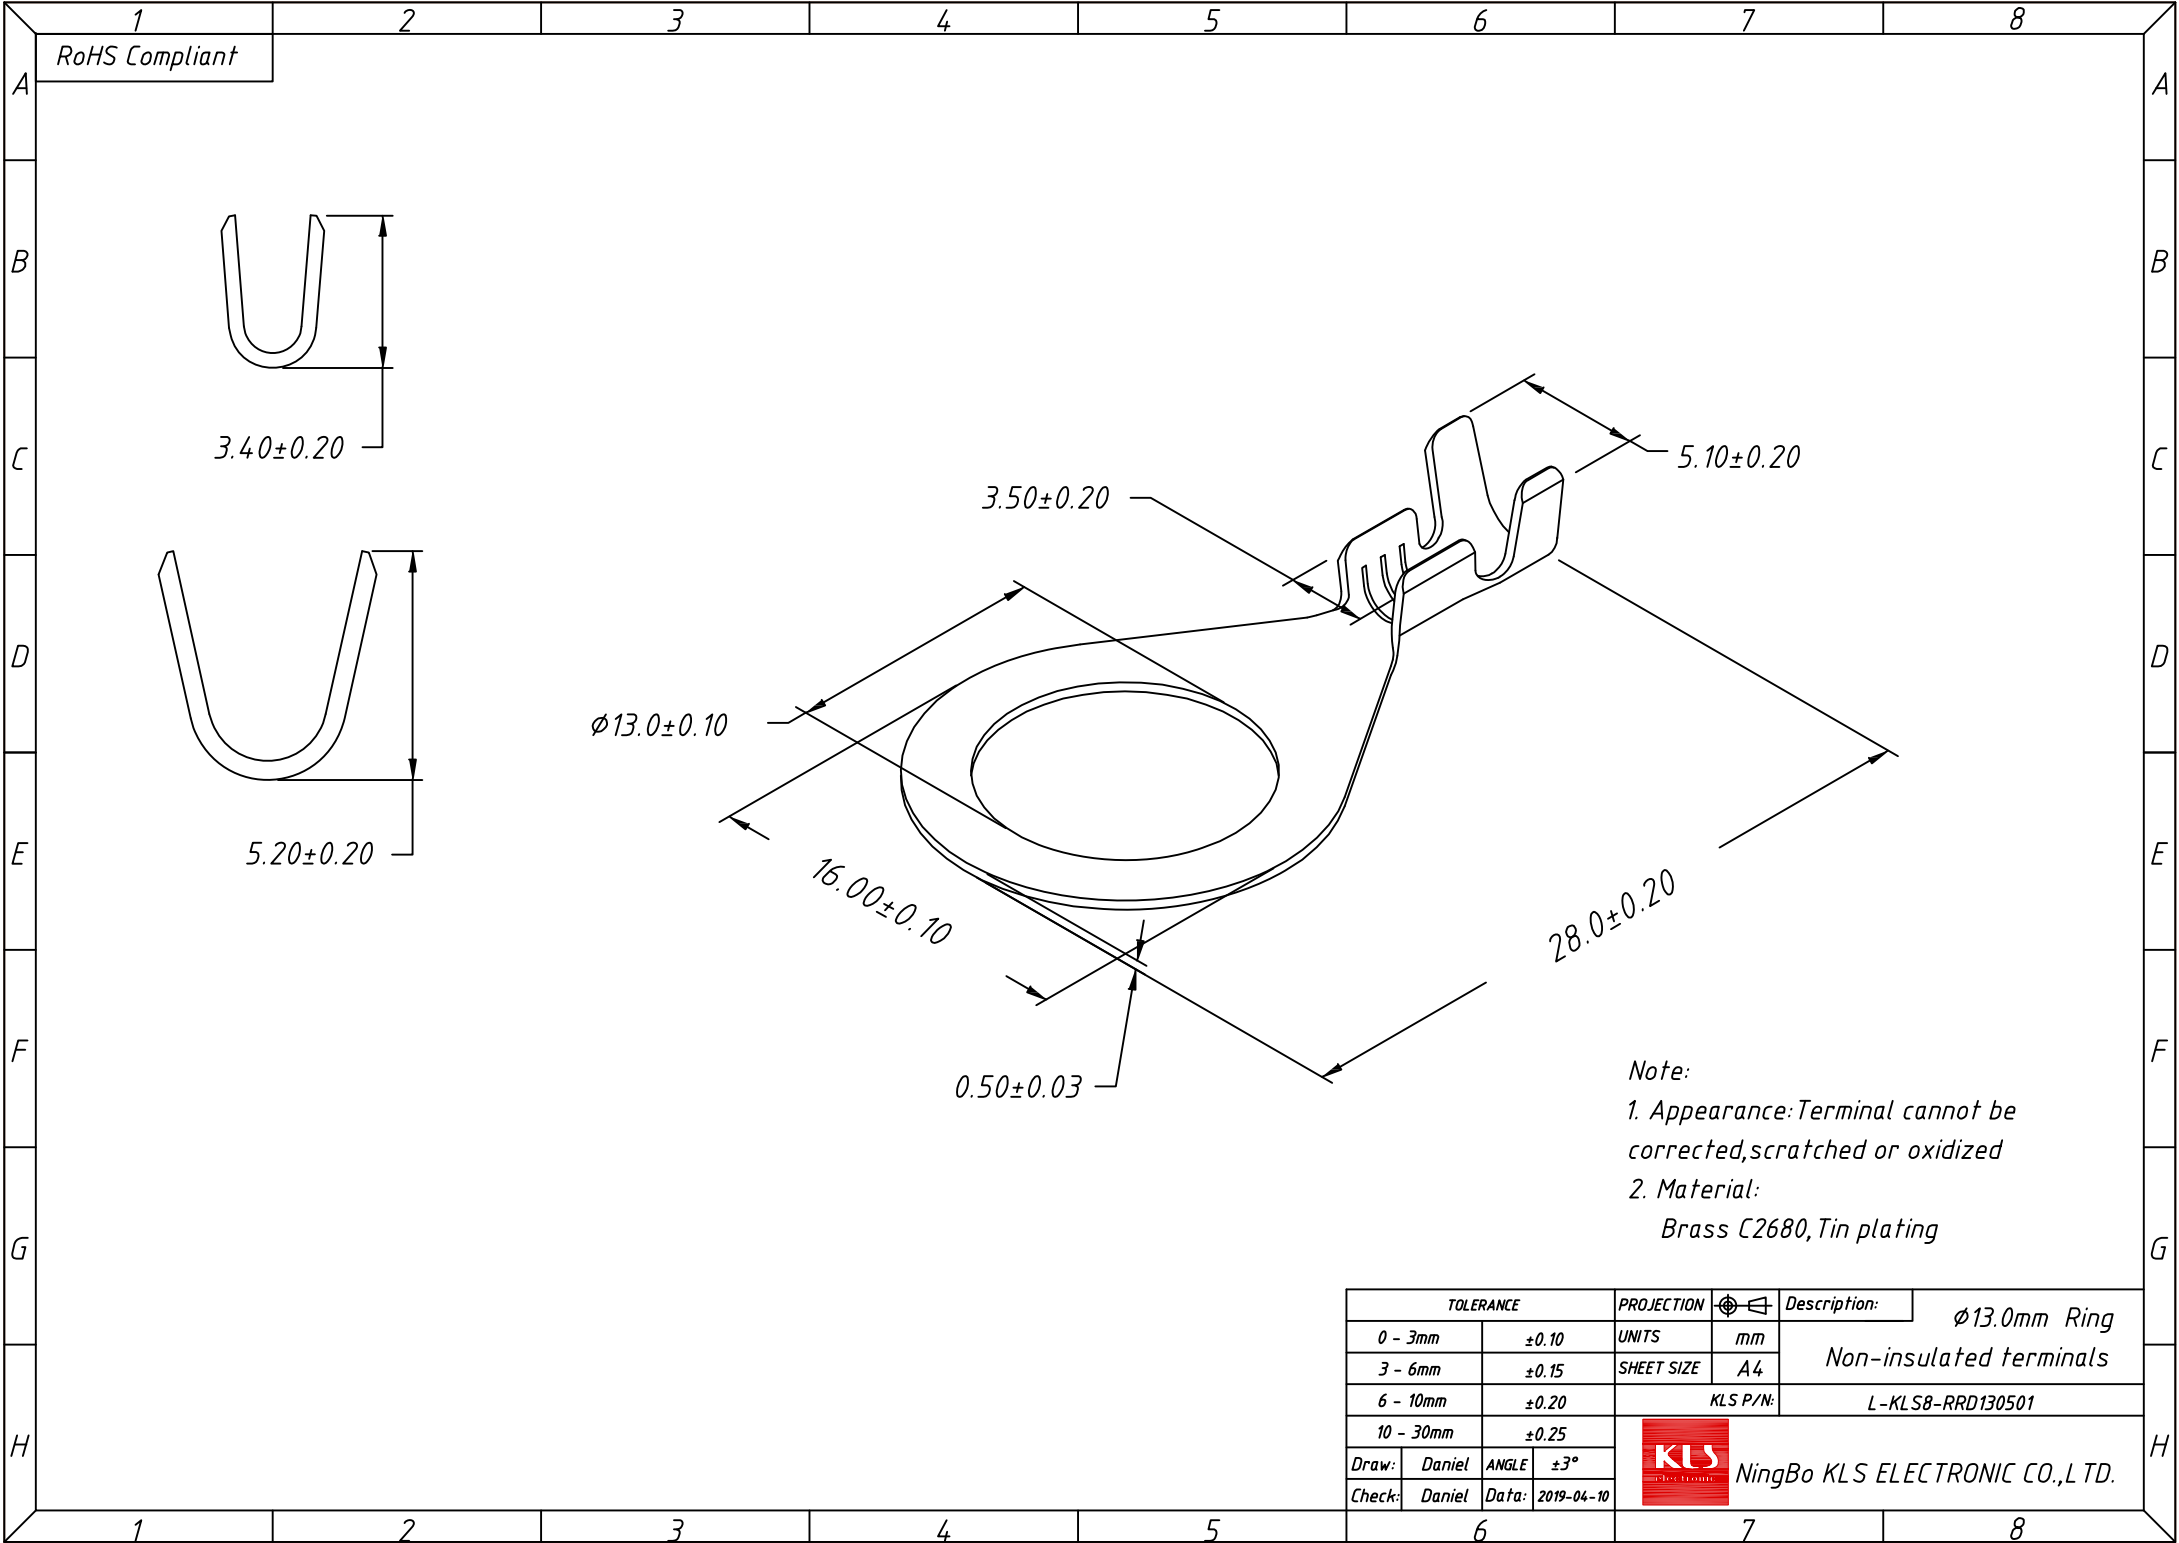

Note:
1. Appearance: Terminal cannot be corrected, scratched or oxidized
2. Material:
Brass C2680, Tin plating

TOLERANCE			PROJECTION		Description:
0 - 3mm	±0.10		UNITS	mm	ø13.0mm Ring Non-insulated terminals
3 - 6mm	±0.15		SHEET SIZE	A4	
6 - 10mm	±0.20		KLS P/N:		L-KLS8-RRD130501
10 - 30mm	±0.25		 NingBo KLS ELECTRONIC CO.,L TD.		
Draw: Daniel	ANGLE	±3°			
Check: Daniel	Data:	2019-04-10			
6			7		8

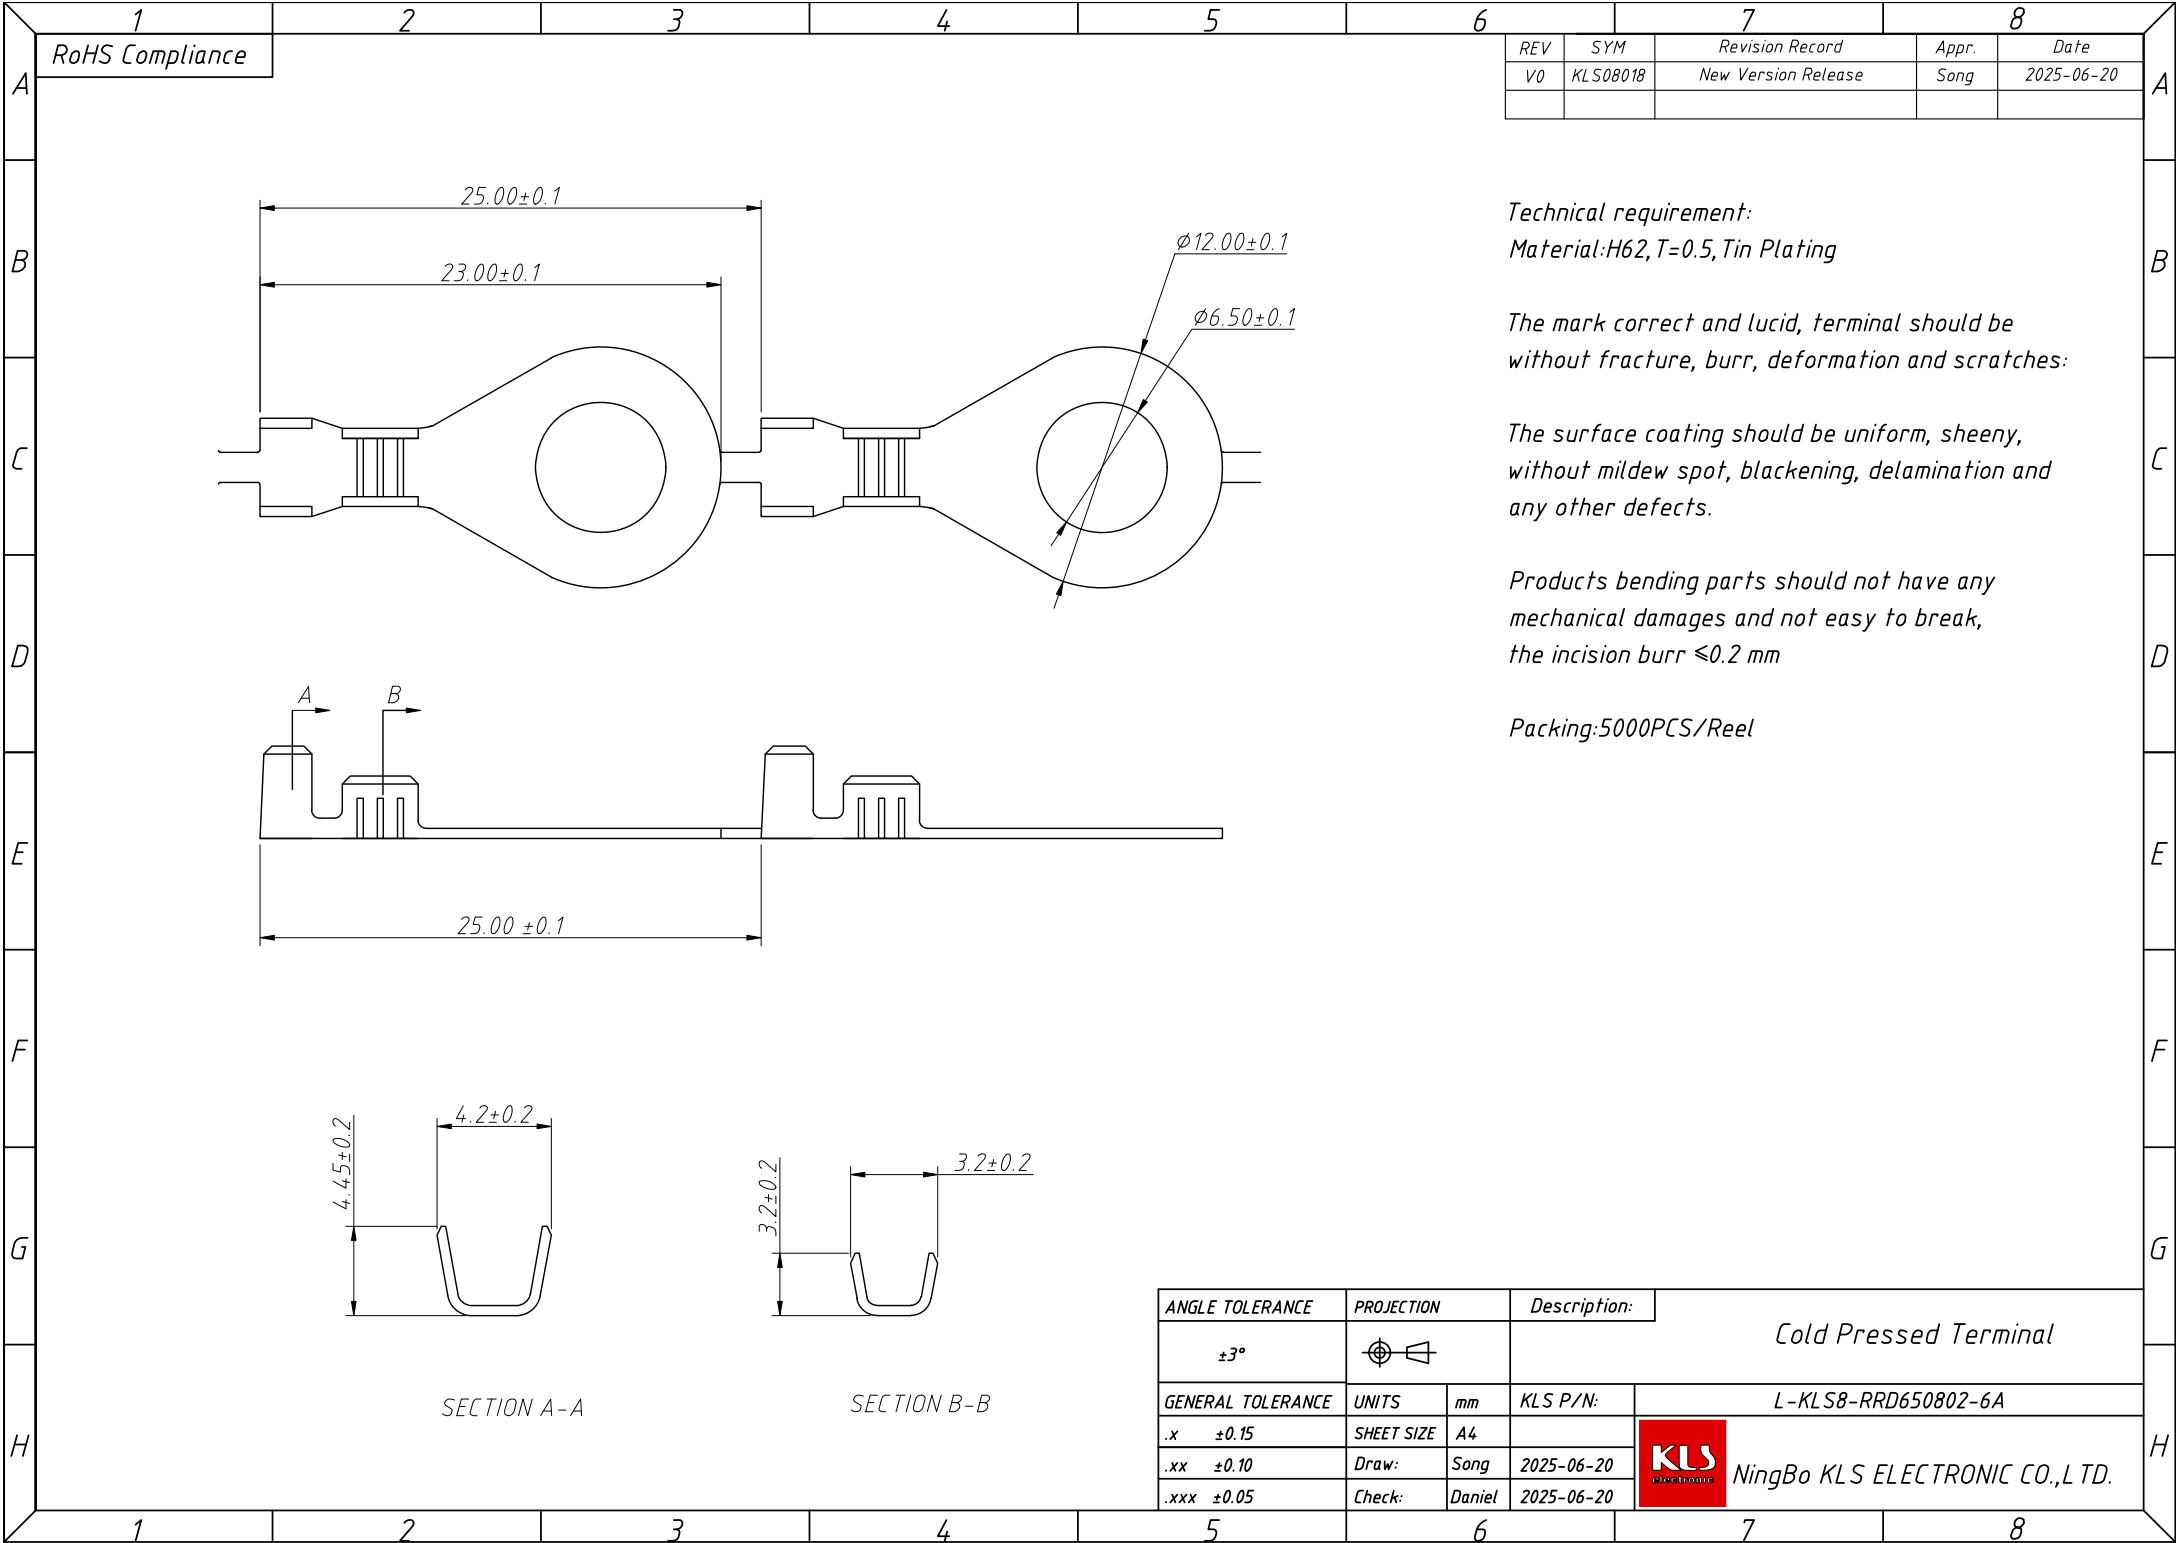

1
RoHS Compliance

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS08018	New Version Release		Song	2025-06-20

Technical requirement:
Material:H62,T=0.5,Tin Plating

The mark correct and lucid, terminal should be without fracture, burr, deformation and scratches:

The surface coating should be uniform, sheeny, without mildew spot, blackening, delamination and any other defects.

Products bending parts should not have any mechanical damages and not easy to break, the incision burr ≤0.2 mm

Packing:5000PCS/Reel

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Cold Pressed Terminal	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
.x	±0.15	SHEET SIZE	A4	L-KLS8-RRD650802-6A	
.xx	±0.10	Draw:	Song	2025-06-20	NingBo KLS ELECTRONIC CO.,LTD.
.xxx	±0.05	Check:	Daniel	2025-06-20	