


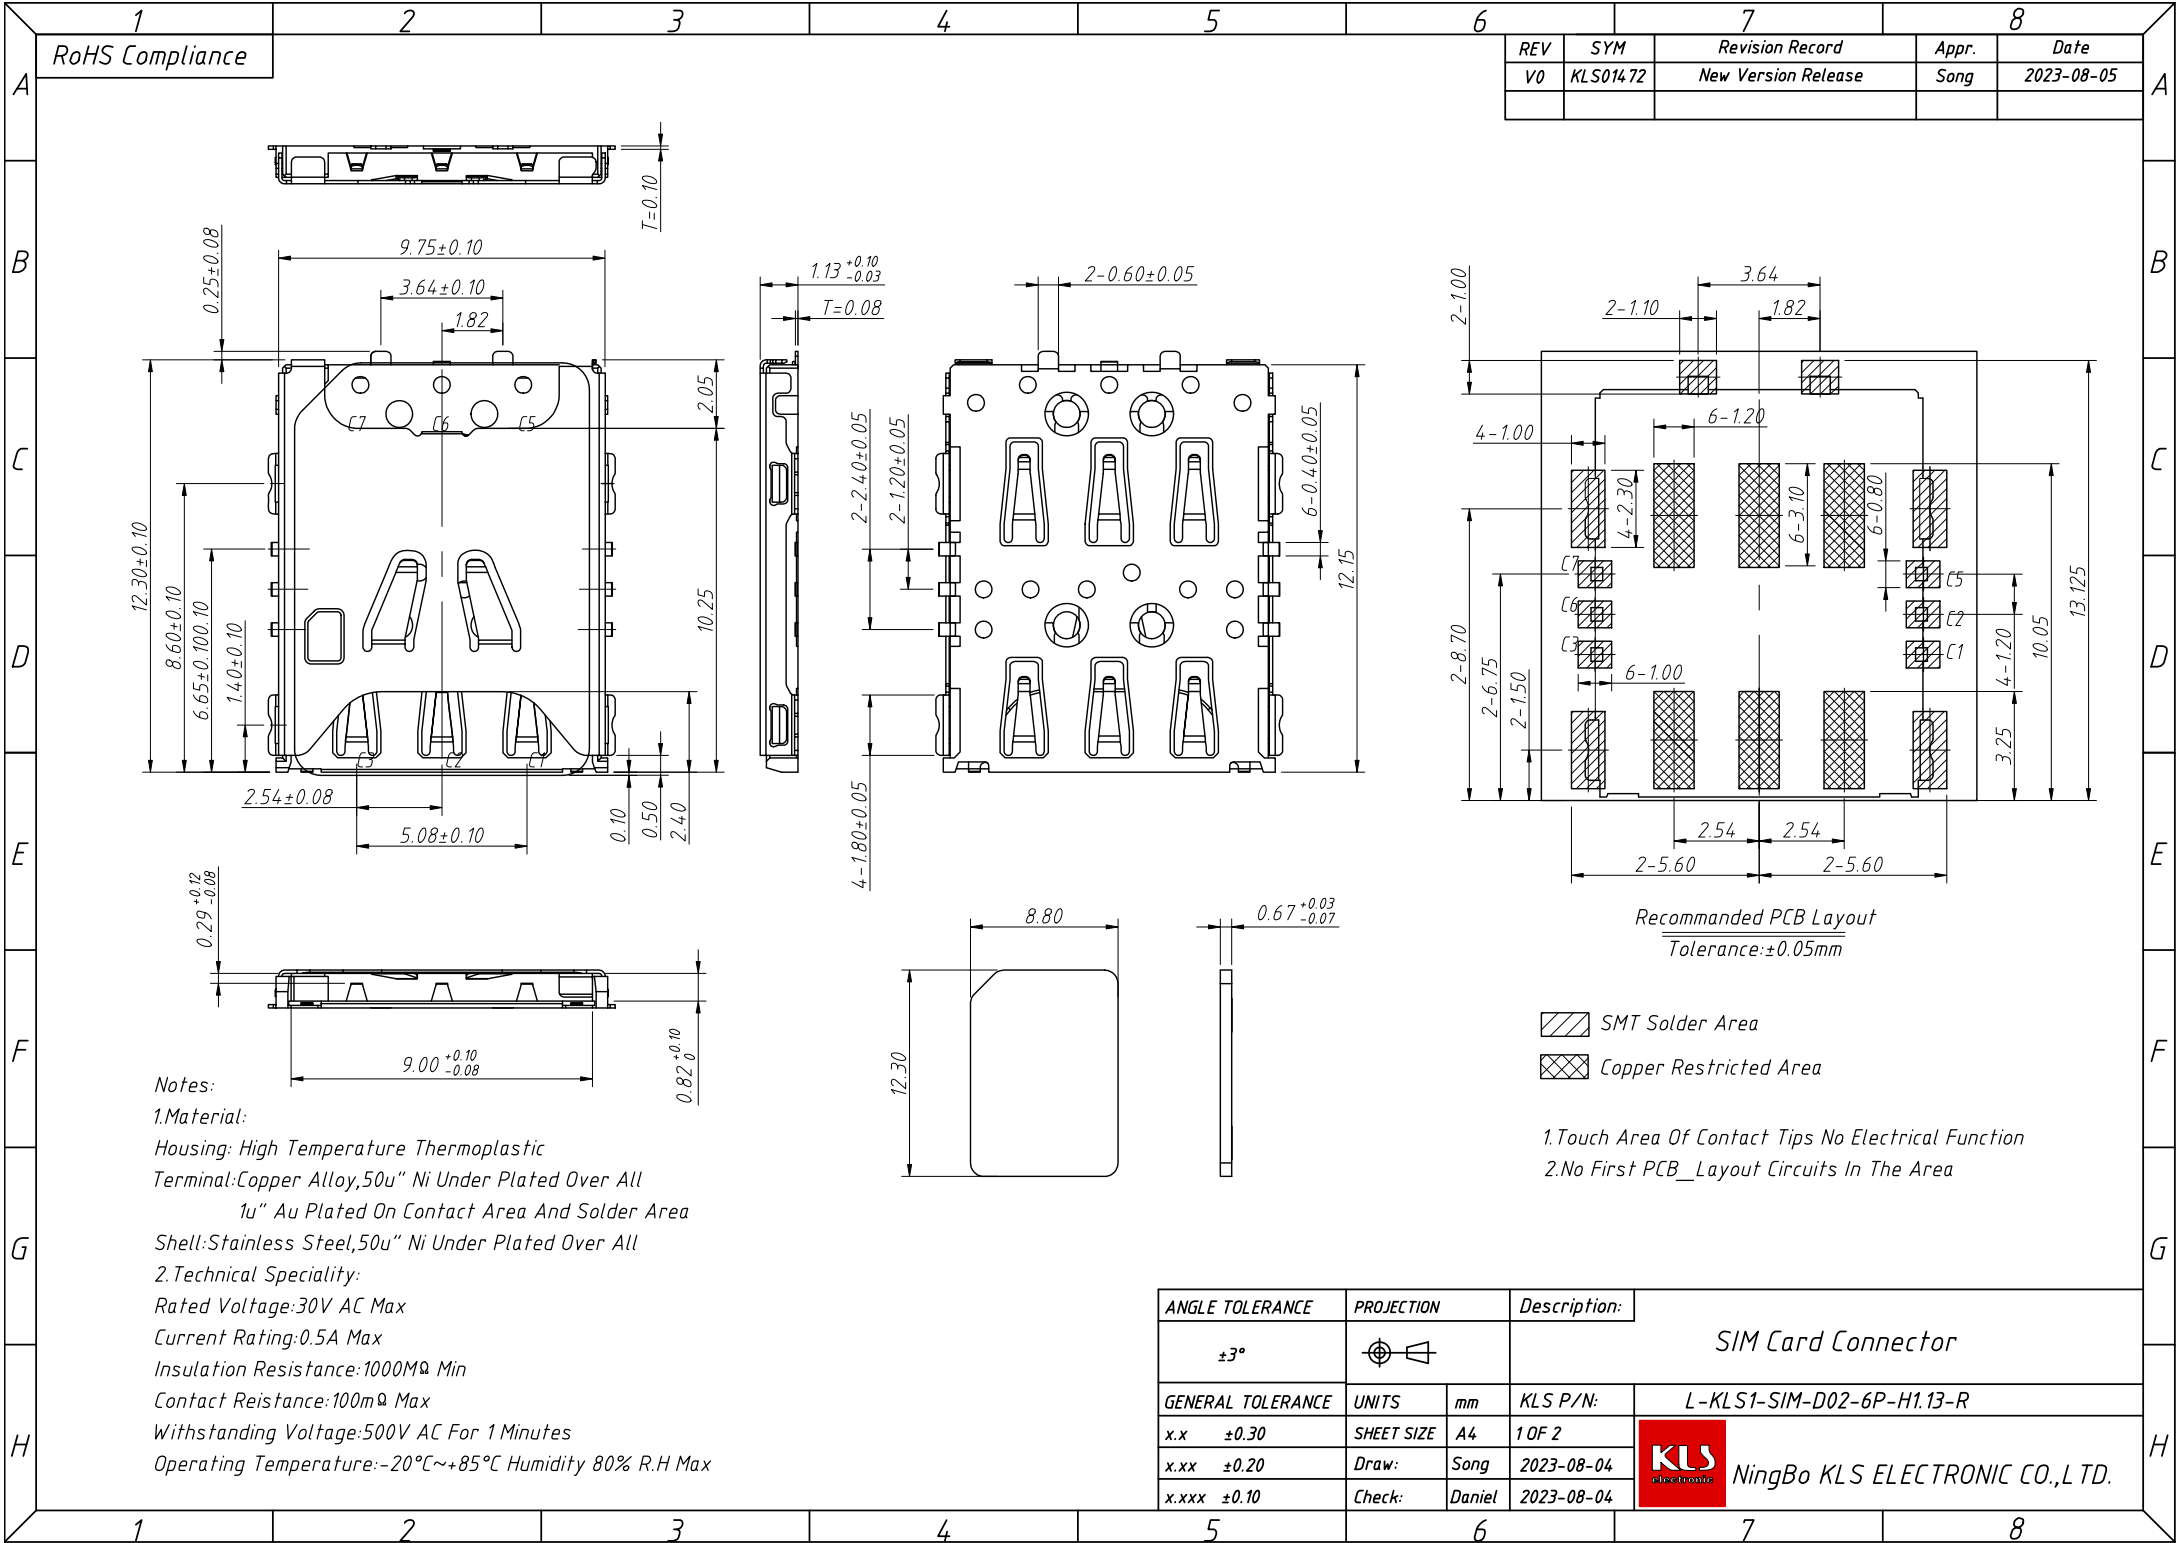

1
RoHS Compliance

2

3

4

5

6

7

8

REV	SYM	Revision Record	Appr.	Date
V0	KLS01472	New Version Release	Song	2023-08-05

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H

H


Notes:
1.Material:
Housing: High Temperature Thermoplastic
Terminal:Copper Alloy,50u" Ni Under Plated Over All
1u" Au Plated On Contact Area And Solder Area
Shell:Stainless Steel,50u" Ni Under Plated Over All
2.Technical Speciality:
Rated Voltage:30V AC Max
Current Rating:0.5A Max
Insulation Resistance:1000MΩ Min
Contact Resistance:100mΩ Max
Withstanding Voltage:500V AC For 1 Minutes
Operating Temperature:-20°C~+85°C Humidity 80% R.H Max

Recommended PCB Layout
Tolerance:±0.05mm

- SMT Solder Area
- Copper Restricted Area

- 1.Touch Area Of Contact Tips No Electrical Function
- 2.No First PCB_Layout Circuits In The Area

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				SIM Card Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-SIM-D02-6P-H1.13-R
x.x	±0.30	SHEET SIZE	A4	1 OF 2	NingBo KLS ELECTRONIC CO.,LTD.
x.xx	±0.20	Draw:	Song	2023-08-04	
x.xxx	±0.10	Check:	Daniel	2023-08-04	

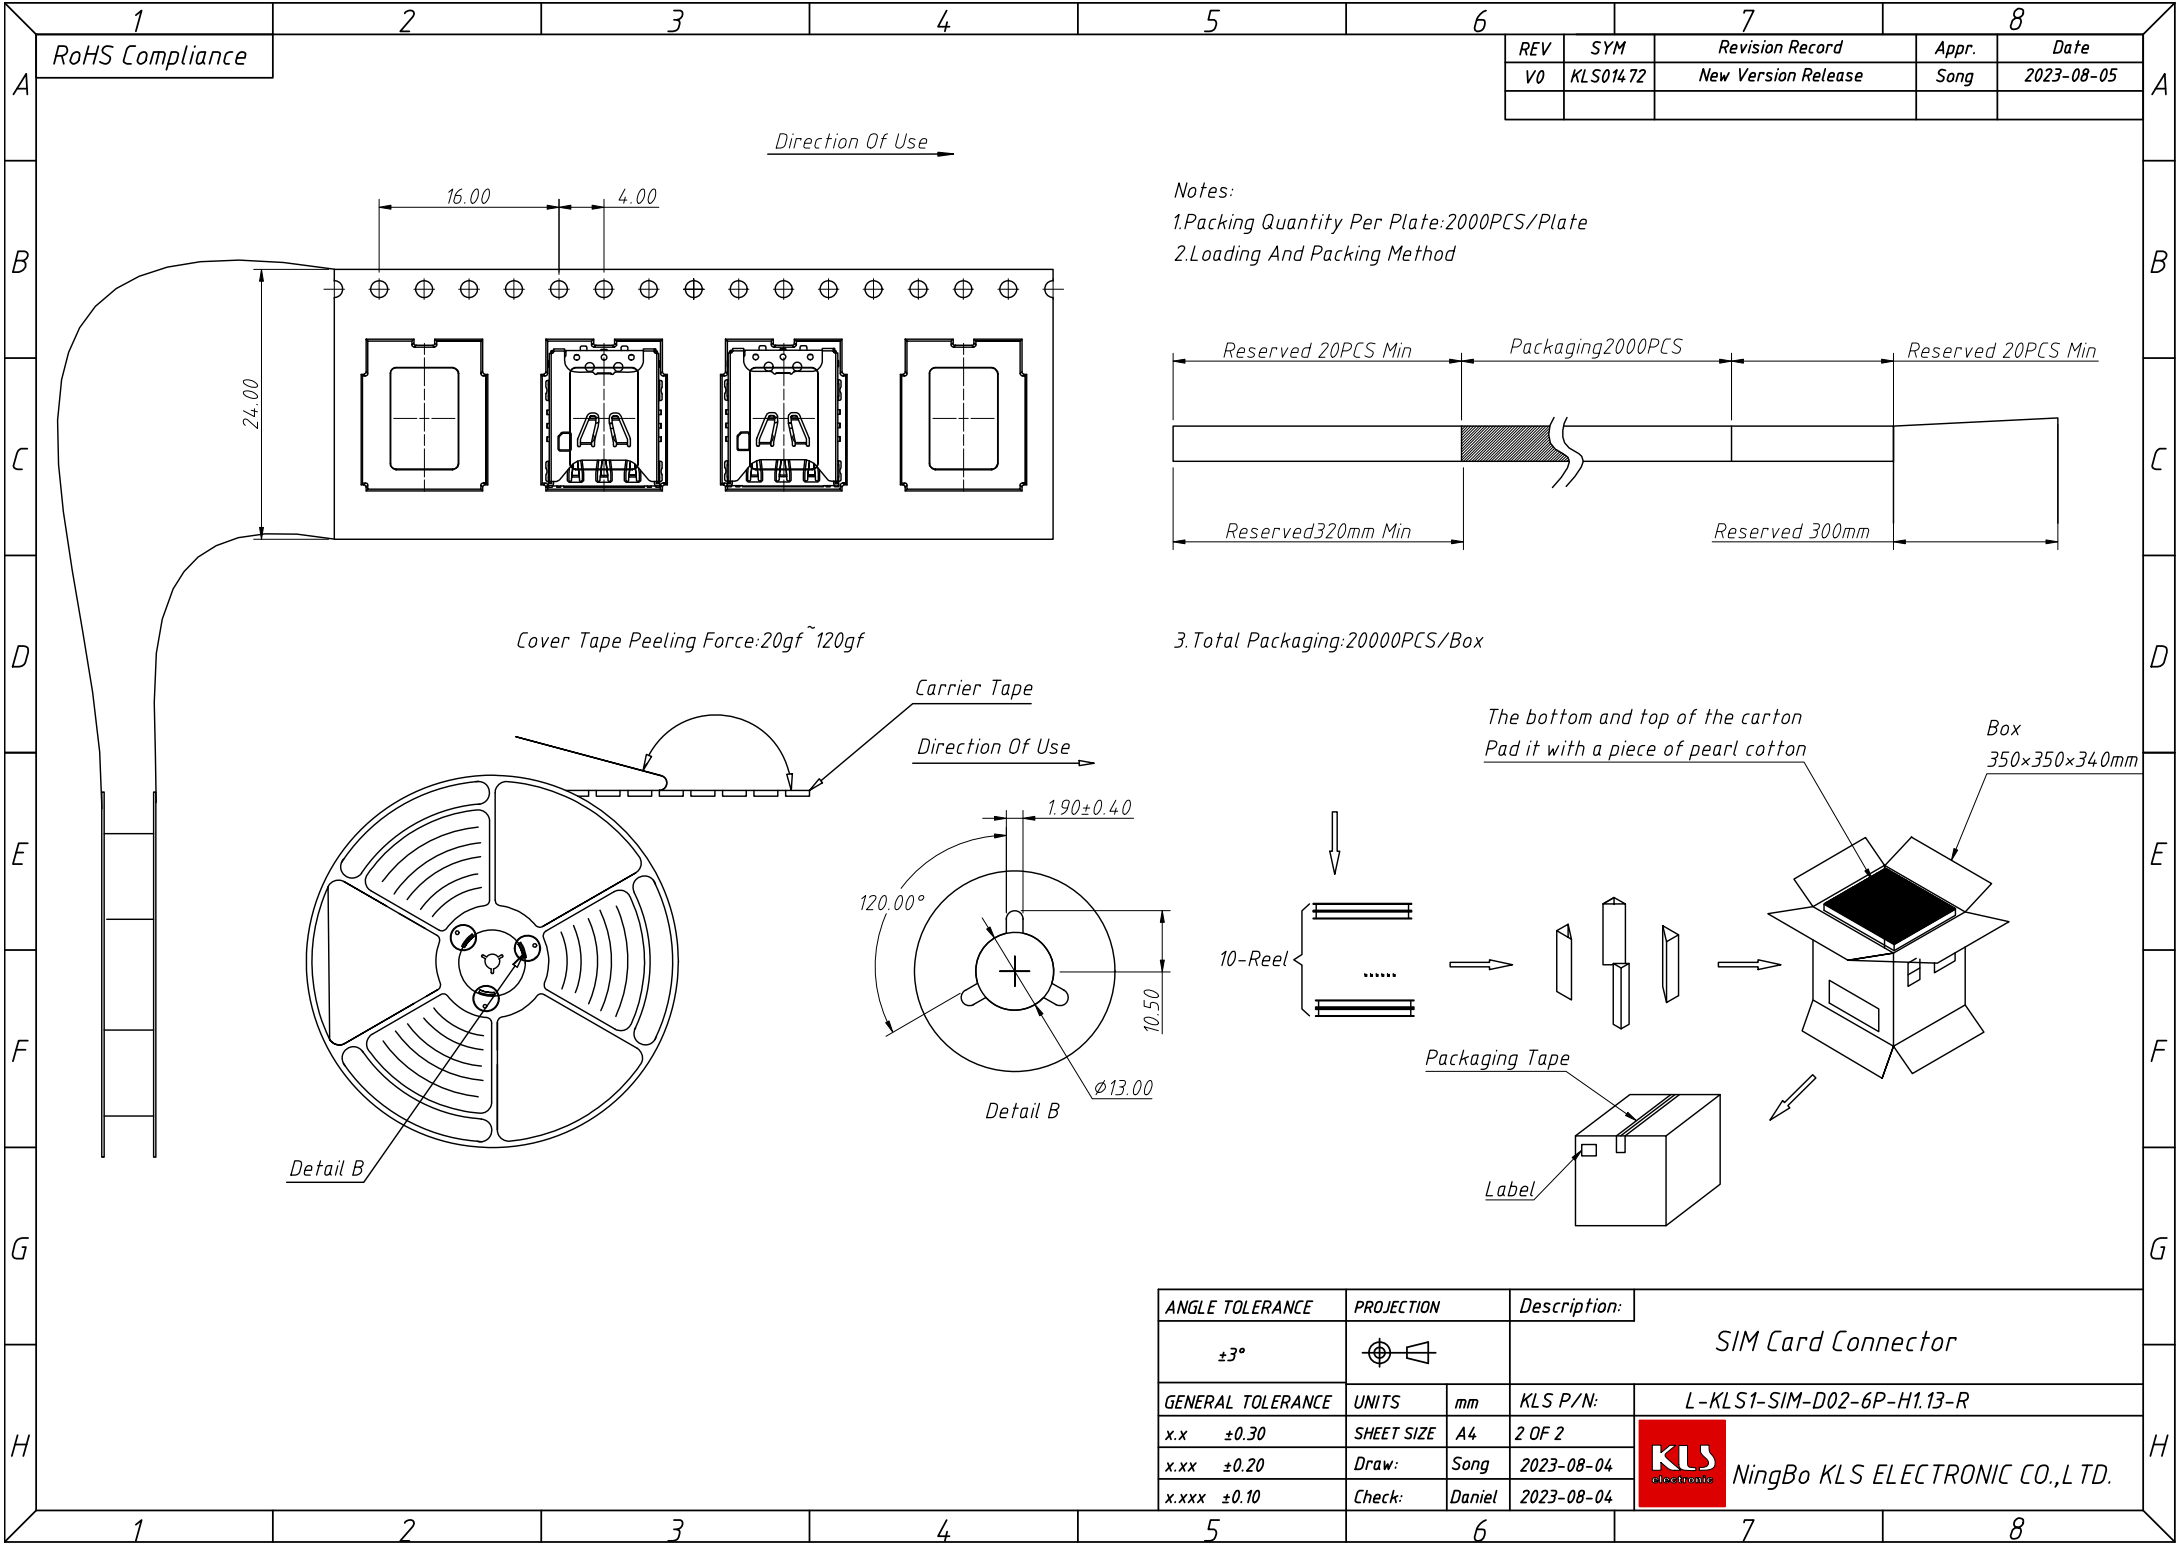

ANGLE TOLERANCE		PROJECTION	Description:	
±3°			SIM Card Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:
x.x	±0.30	SHEET SIZE	A4	2 OF 2
x.xx	±0.20	Draw:	Song	2023-08-04
x.xxx	±0.10	Check:	Daniel	2023-08-04

NingBo KLS ELECTRONIC CO.,LTD.