
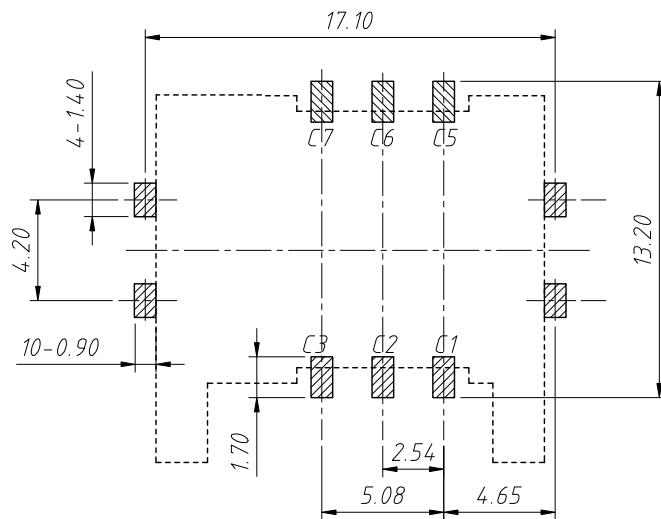
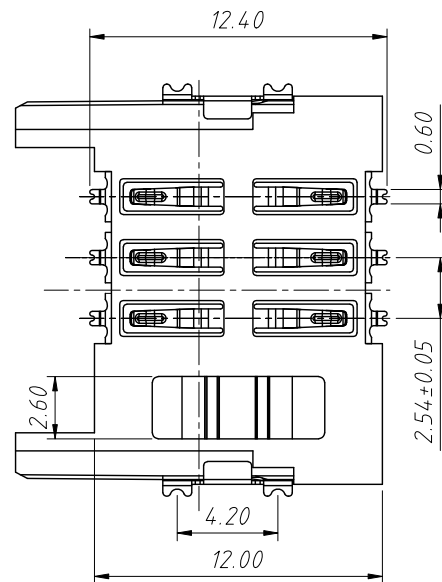
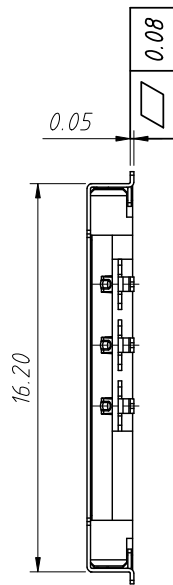


RoHS Compliance

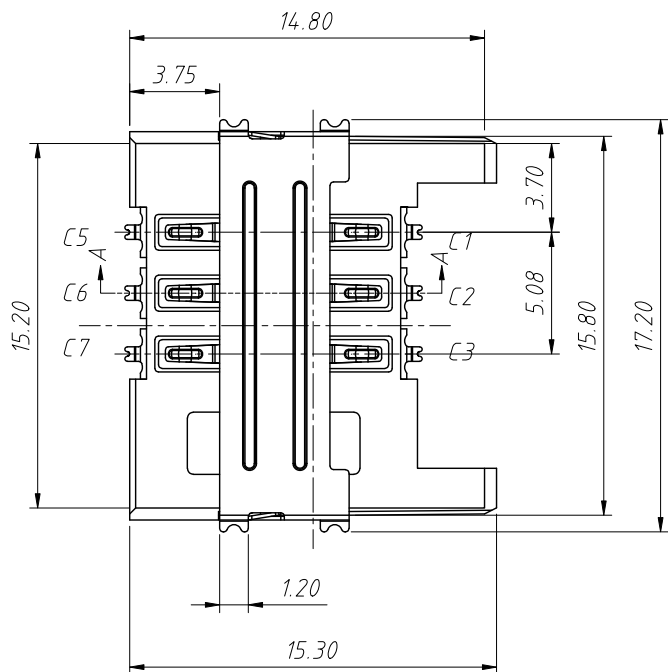

Recommended PCB Mounting Pattern Tol:±0.05

Material:

Housing:Thermoplastic,UI94V-0,Black

Contact:Copper Alloy

Shell:Stainless Steel

Finish:

Contact:50u"Min.Nickel Under Plated,

Plated 3u "Au On Contact Area,

Plated Gold Flash On Solder Area.

Electrical Specifications:

Voltage Rating:12 VAC

Current:1 Amperes Max. Per Contact

Operation Temperature Range:-25C ~ +70°C

Contact Resistance:60MΩ Max.

Insulation Resistance:1000MΩ Min


Dielectric Withstanding Voltage:

500V Ac For 1 Minute

Max Processing Temp:260°C For 30 Seconds

Package:

Tape Reel Package,1000pcs/Reel

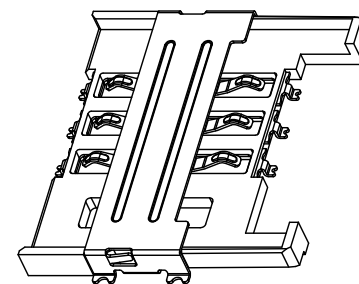

Section A-A

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				SIM 1.90H Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-SIM-035-6P-R
0-6	±0.10	SHEET SIZE	A4		
6-30	±0.20	Draw:	Daniel	2023-02-14	NingBo KLS ELECTRONIC CO.,L TD.
30-120	±0.30	Check:	Daniel	2023-02-14	