



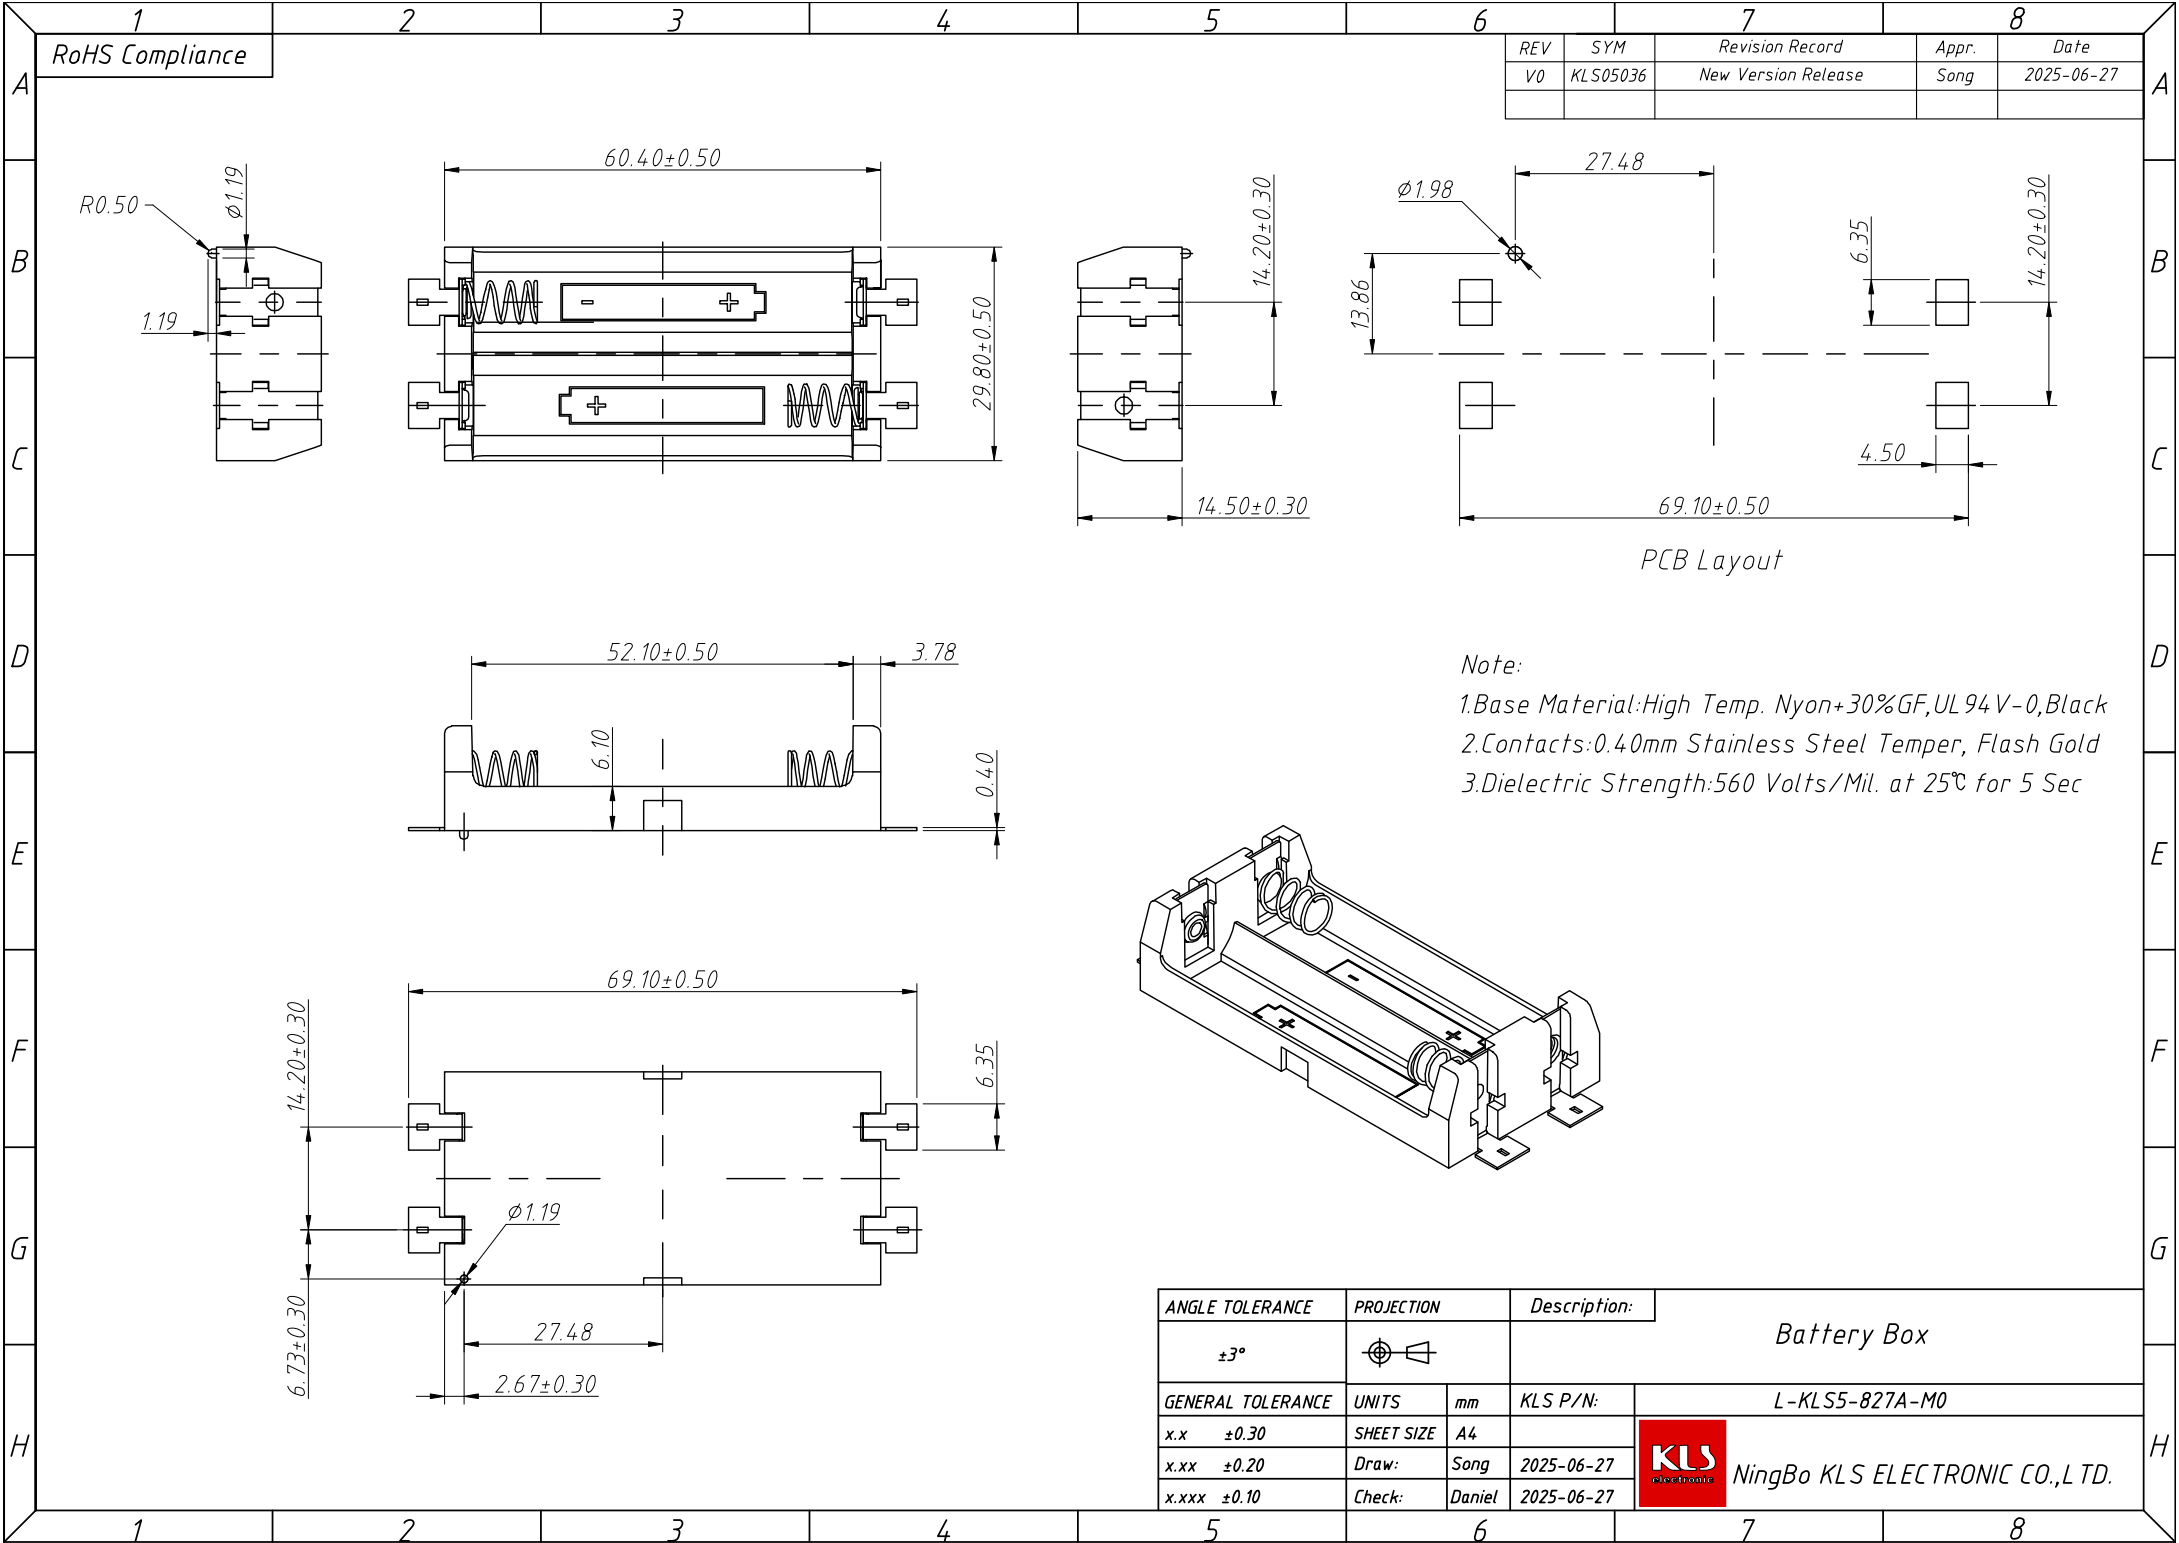

Note:
1.Base Material:High Temp. Nylon+30%GF,UL 94V-0,Black
2.Contacts:0.40mm Stainless Steel Temper, Flash Gold
3.Dielectric Strength:560 Volts/Mil. at 25℃ for 5 Sec

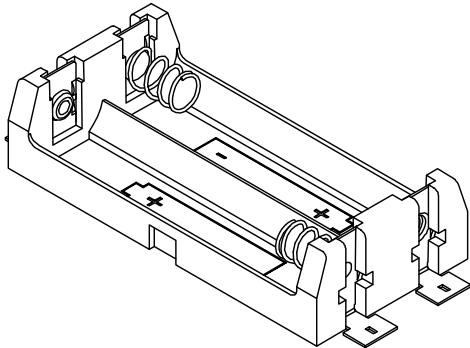

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^{\circ}$				Battery Box	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x	± 0.30	SHEET SIZE	A4	L-KLS5-827A-M0	
x.xx	± 0.20	Draw:	Song	2025-06-27	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx	± 0.10	Check:	Daniel	2025-06-27	