


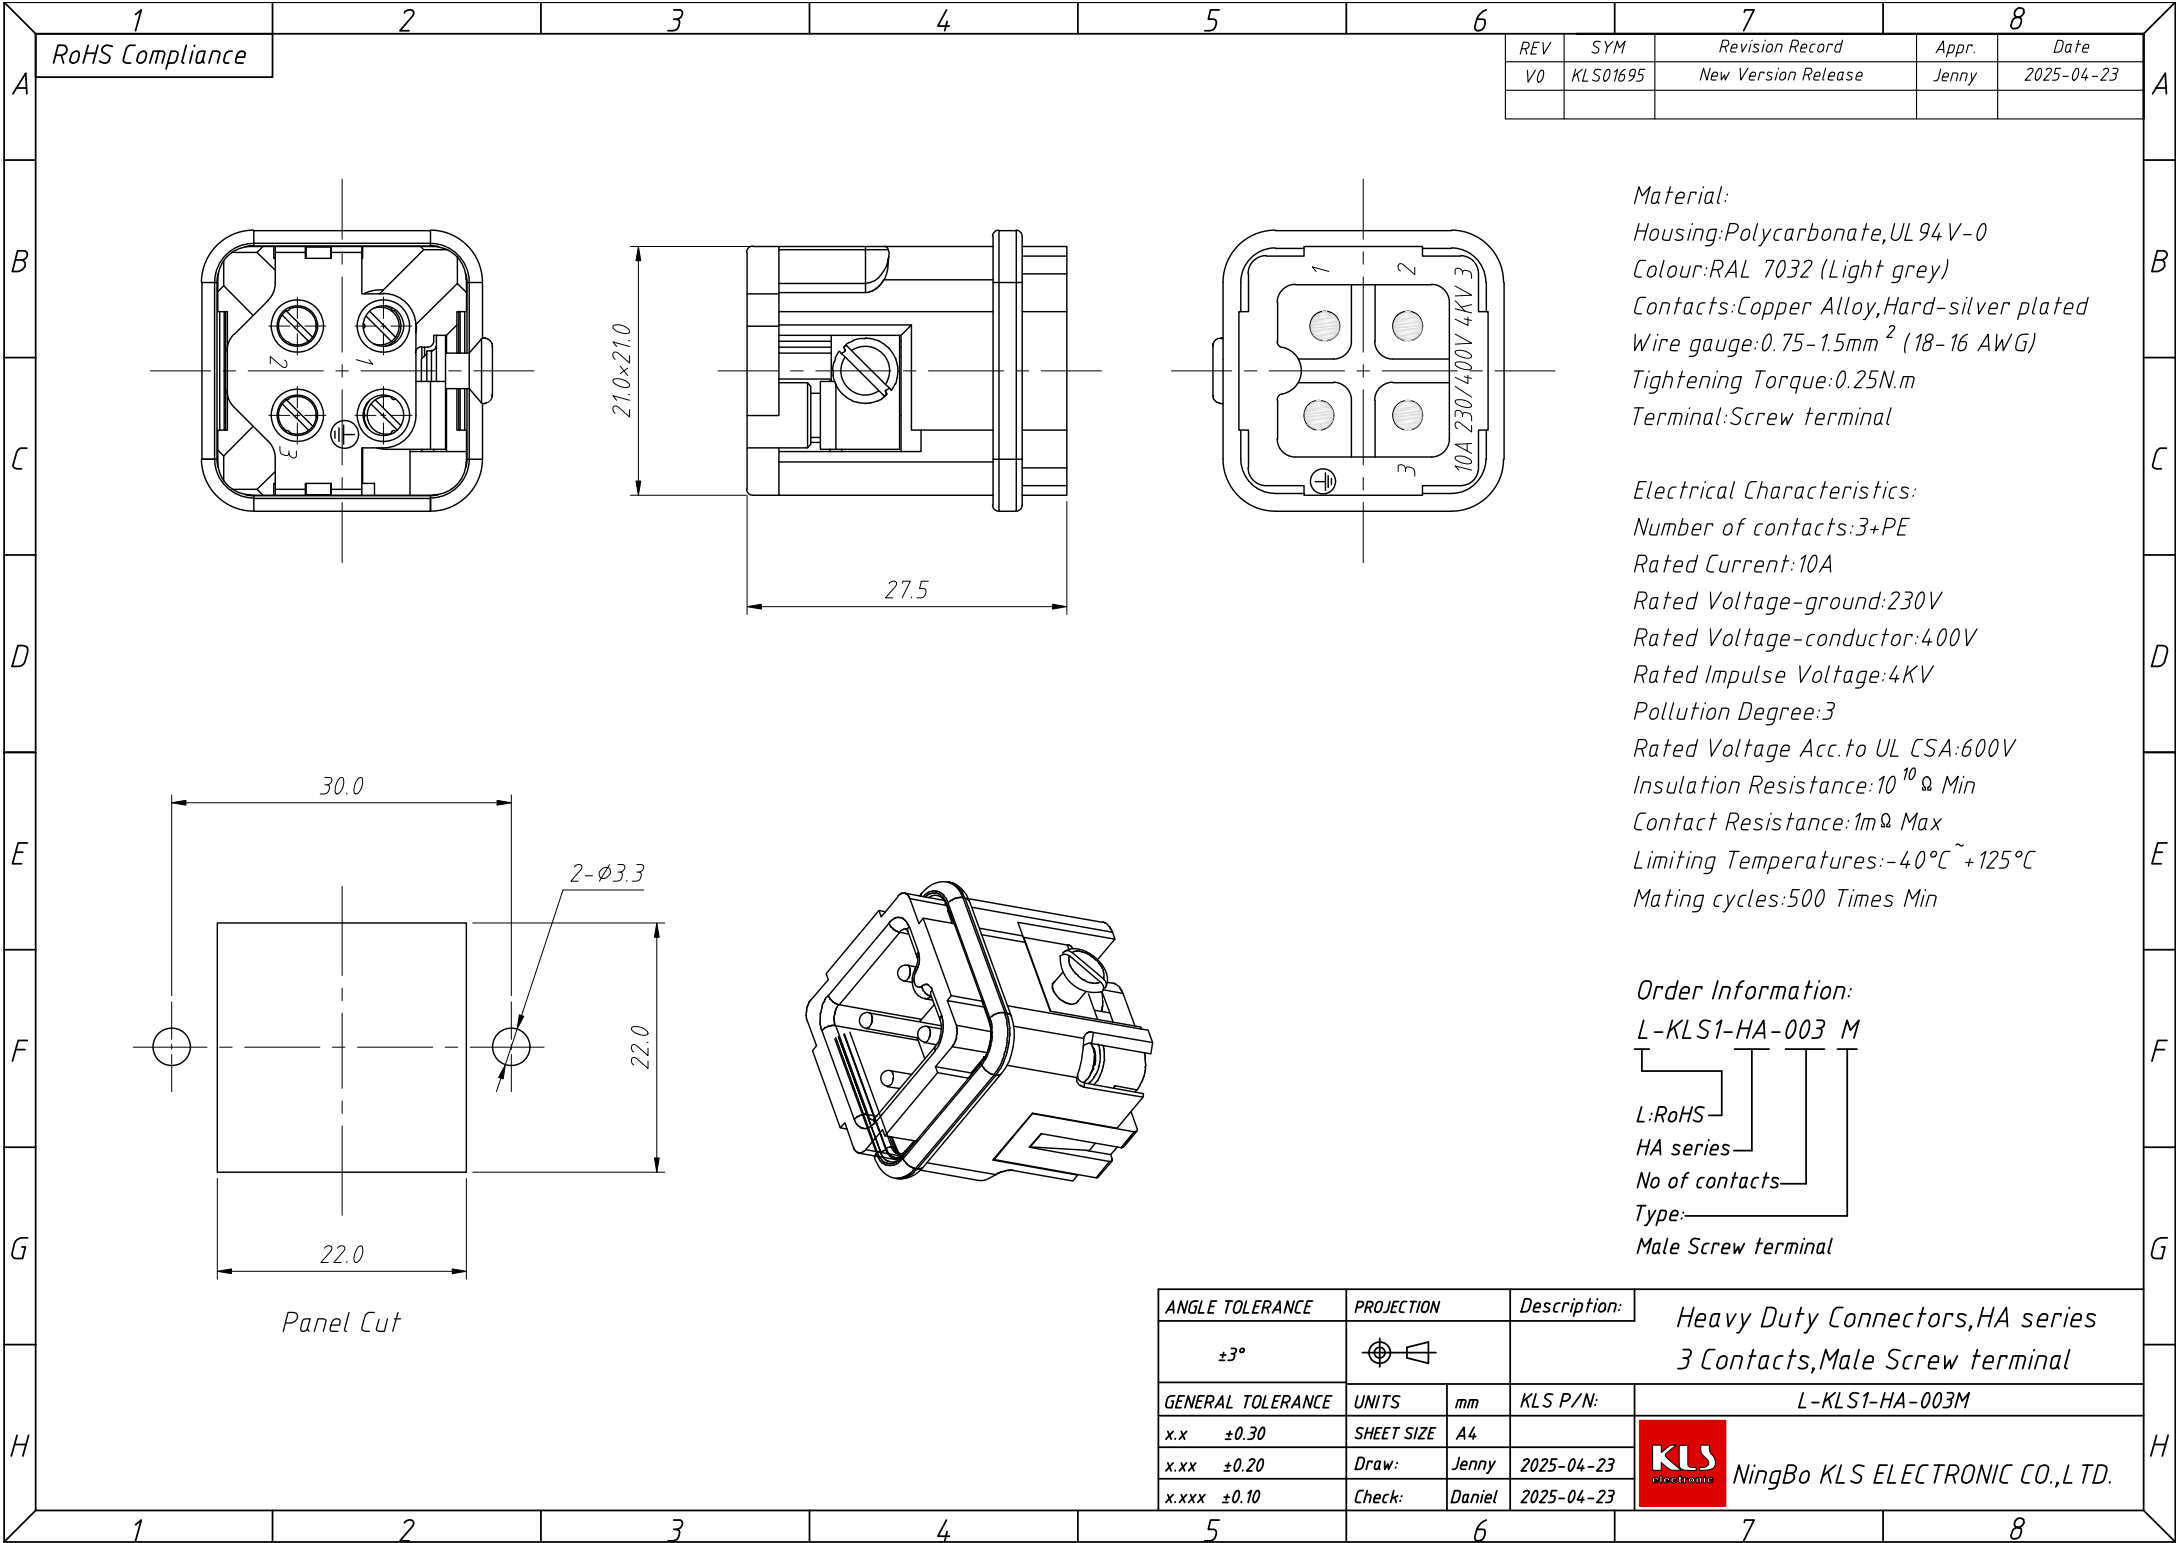

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01695	New Version Release	Jenny	2025-04-23

Material:
Housing:Polycarbonate,UL 94V-0
Colour:RAL 7032 (Light grey)
Contacts:Copper Alloy,Hard-silver plated
Wire gauge:0.75-1.5mm² (18-16 AWG)
Tightening Torque:0.25N.m
Terminal:Screw terminal

Electrical Characteristics:
Number of contacts:3+PE
Rated Current:10A
Rated Voltage-ground:230V
Rated Voltage-conductor:400V
Rated Impulse Voltage:4KV
Pollution Degree:3
Rated Voltage Acc.to UL CSA:600V
Insulation Resistance:10¹⁰Ω Min
Contact Resistance:1mΩ Max
Limiting Temperatures:-40°C ~ +125°C
Mating cycles:500 Times Min

Order Information:
L-KLS1-HA-003 M
L:RoHS
HA series
No of contacts
Type:
Male Screw terminal

ANGLE TOLERANCE	PROJECTION	Description:	Heavy Duty Connectors,HA series 3 Contacts,Male Screw terminal
±3°			
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS1-HA-003M
x.xx ±0.20	Draw:	Jenny	2025-04-23
x.xxx ±0.10	Check:	Daniel	2025-04-23



NingBo KLS ELECTRONIC CO.,L TD.