


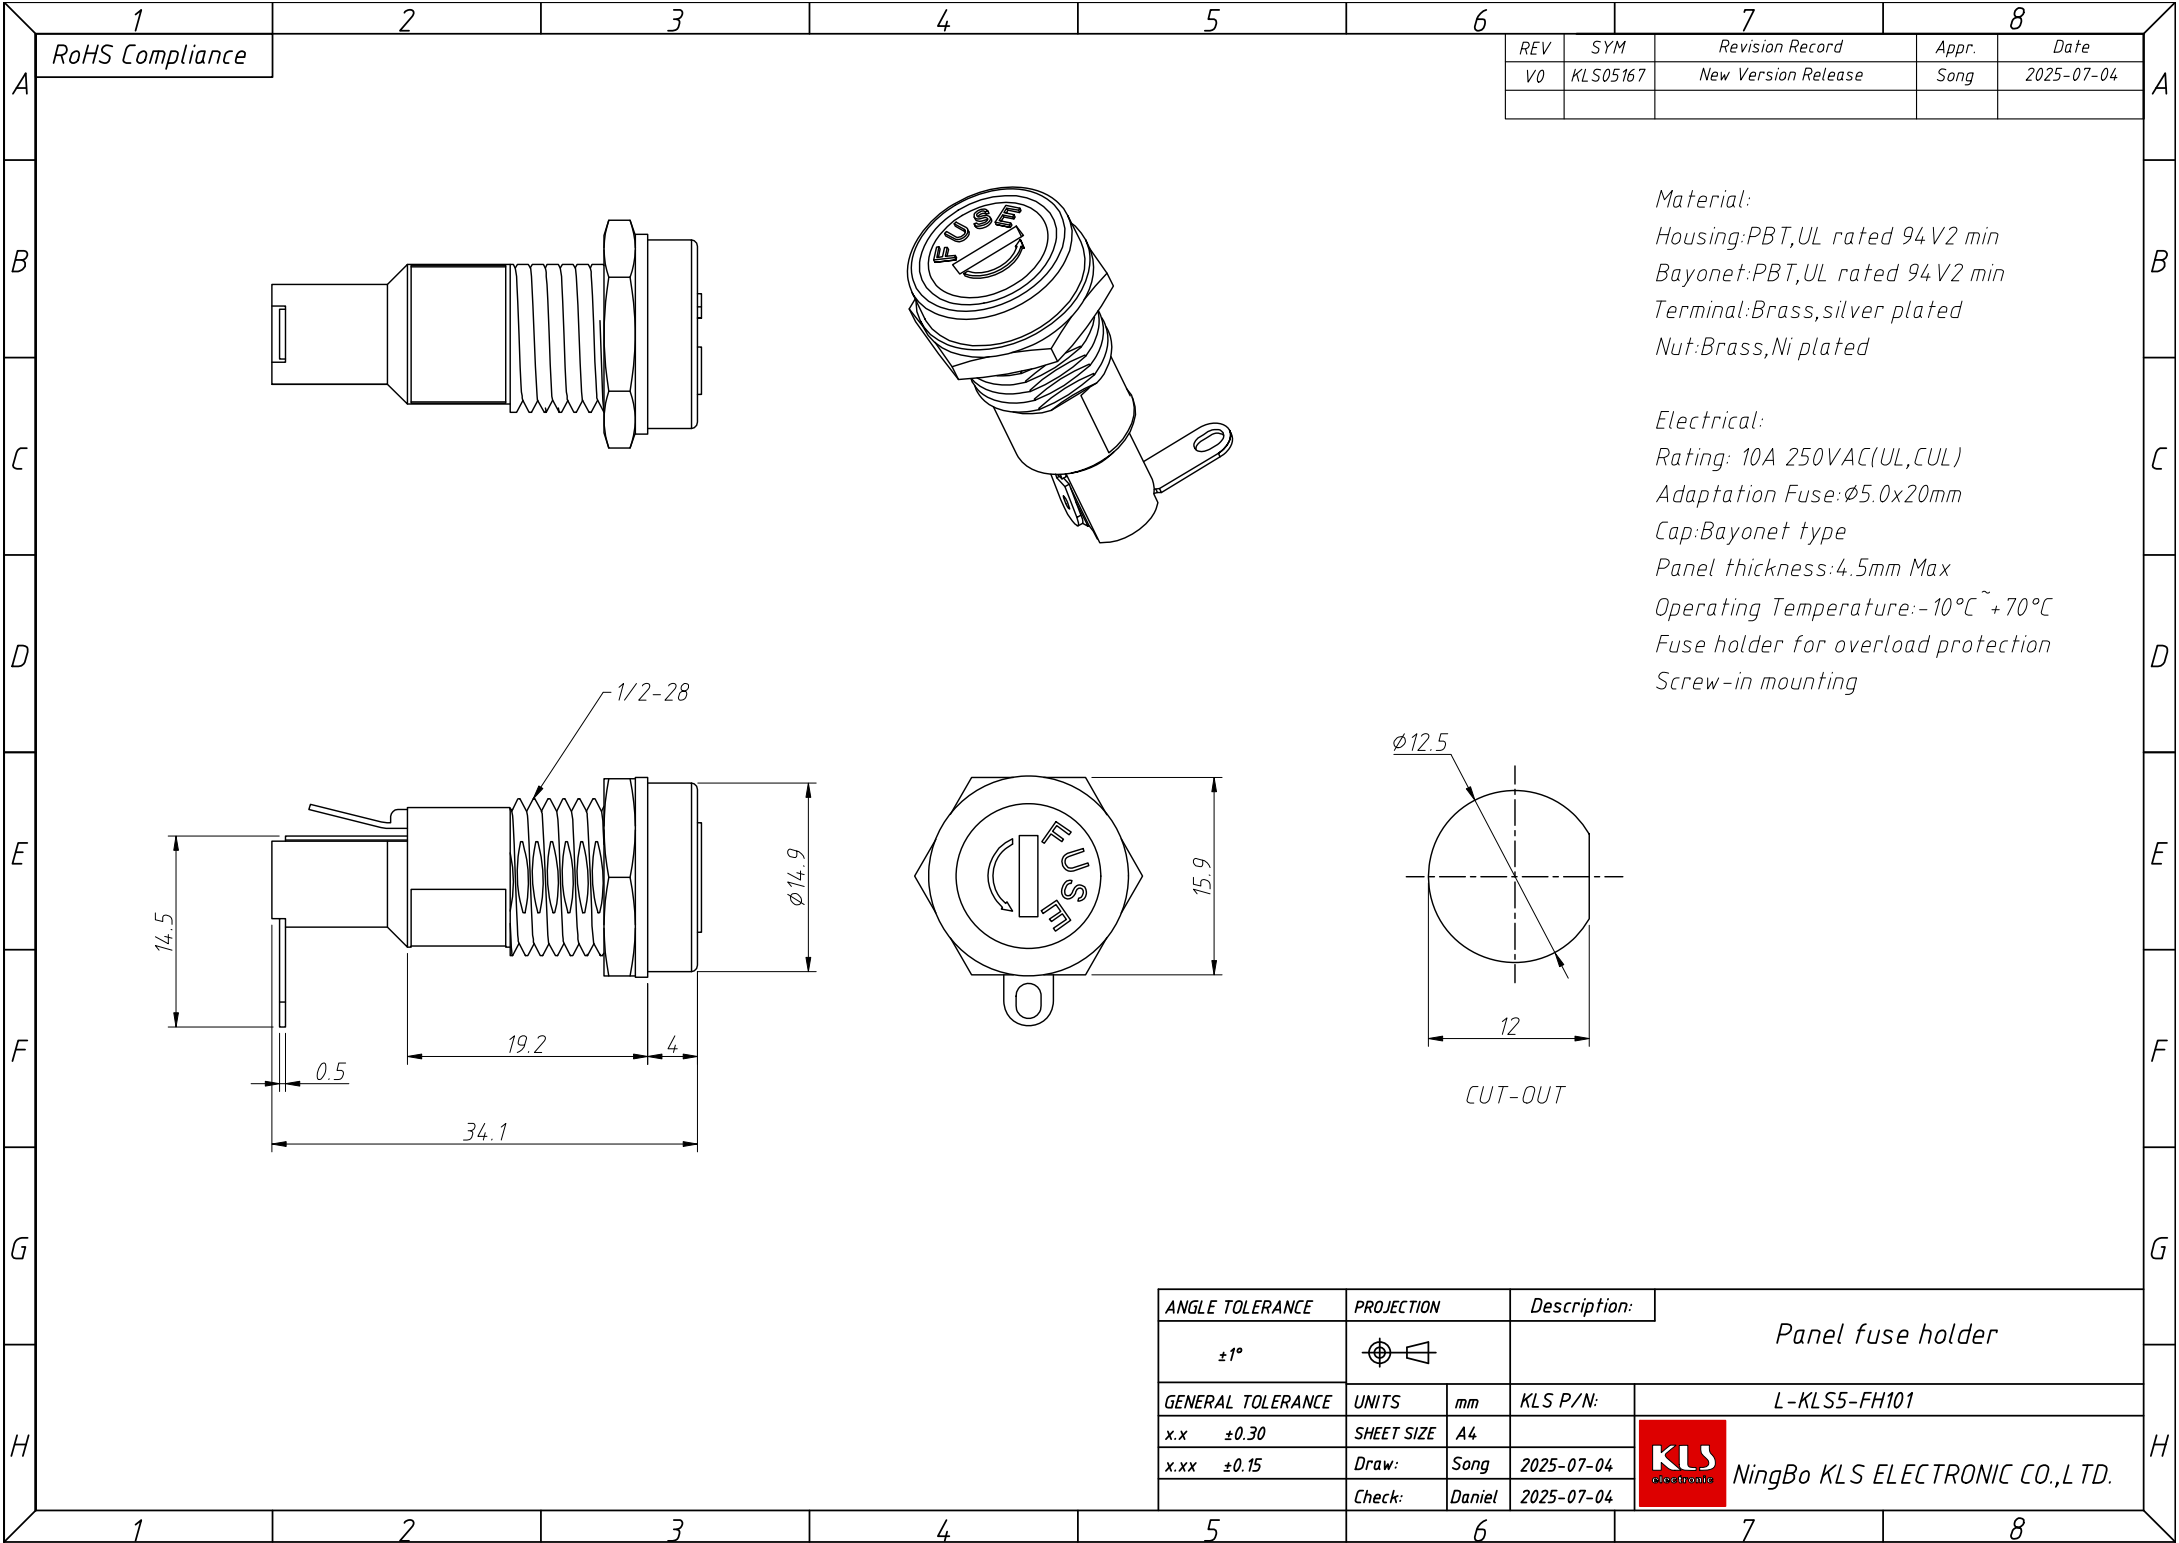

1
RoHS Compliance

2

3

4

5

6

7

8

REV	SYM	Revision Record	Appr.	Date
V0	KLS05167	New Version Release	Song	2025-07-04

Material:
Housing:PBT,UL rated 94V2 min
Bayonet:PBT,UL rated 94V2 min
Terminal:Brass,silver plated
Nut:Brass,Ni plated

Electrical:
Rating: 10A 250VAC(UL,CUL)
Adaptation Fuse: $\phi 5.0 \times 20\text{mm}$
Cap:Bayonet type
Panel thickness:4.5mm Max
Operating Temperature:-10°C ~ +70°C
Fuse holder for overload protection
Screw-in mounting

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 1^\circ$				Panel fuse holder	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	
x.x	± 0.30	SHEET SIZE	A4	L-KLS5-FH101	
x.xx	± 0.15	Draw:	Song	2025-07-04	NingBo KLS ELECTRONIC CO.,LTD.
		Check:	Daniel	2025-07-04	