


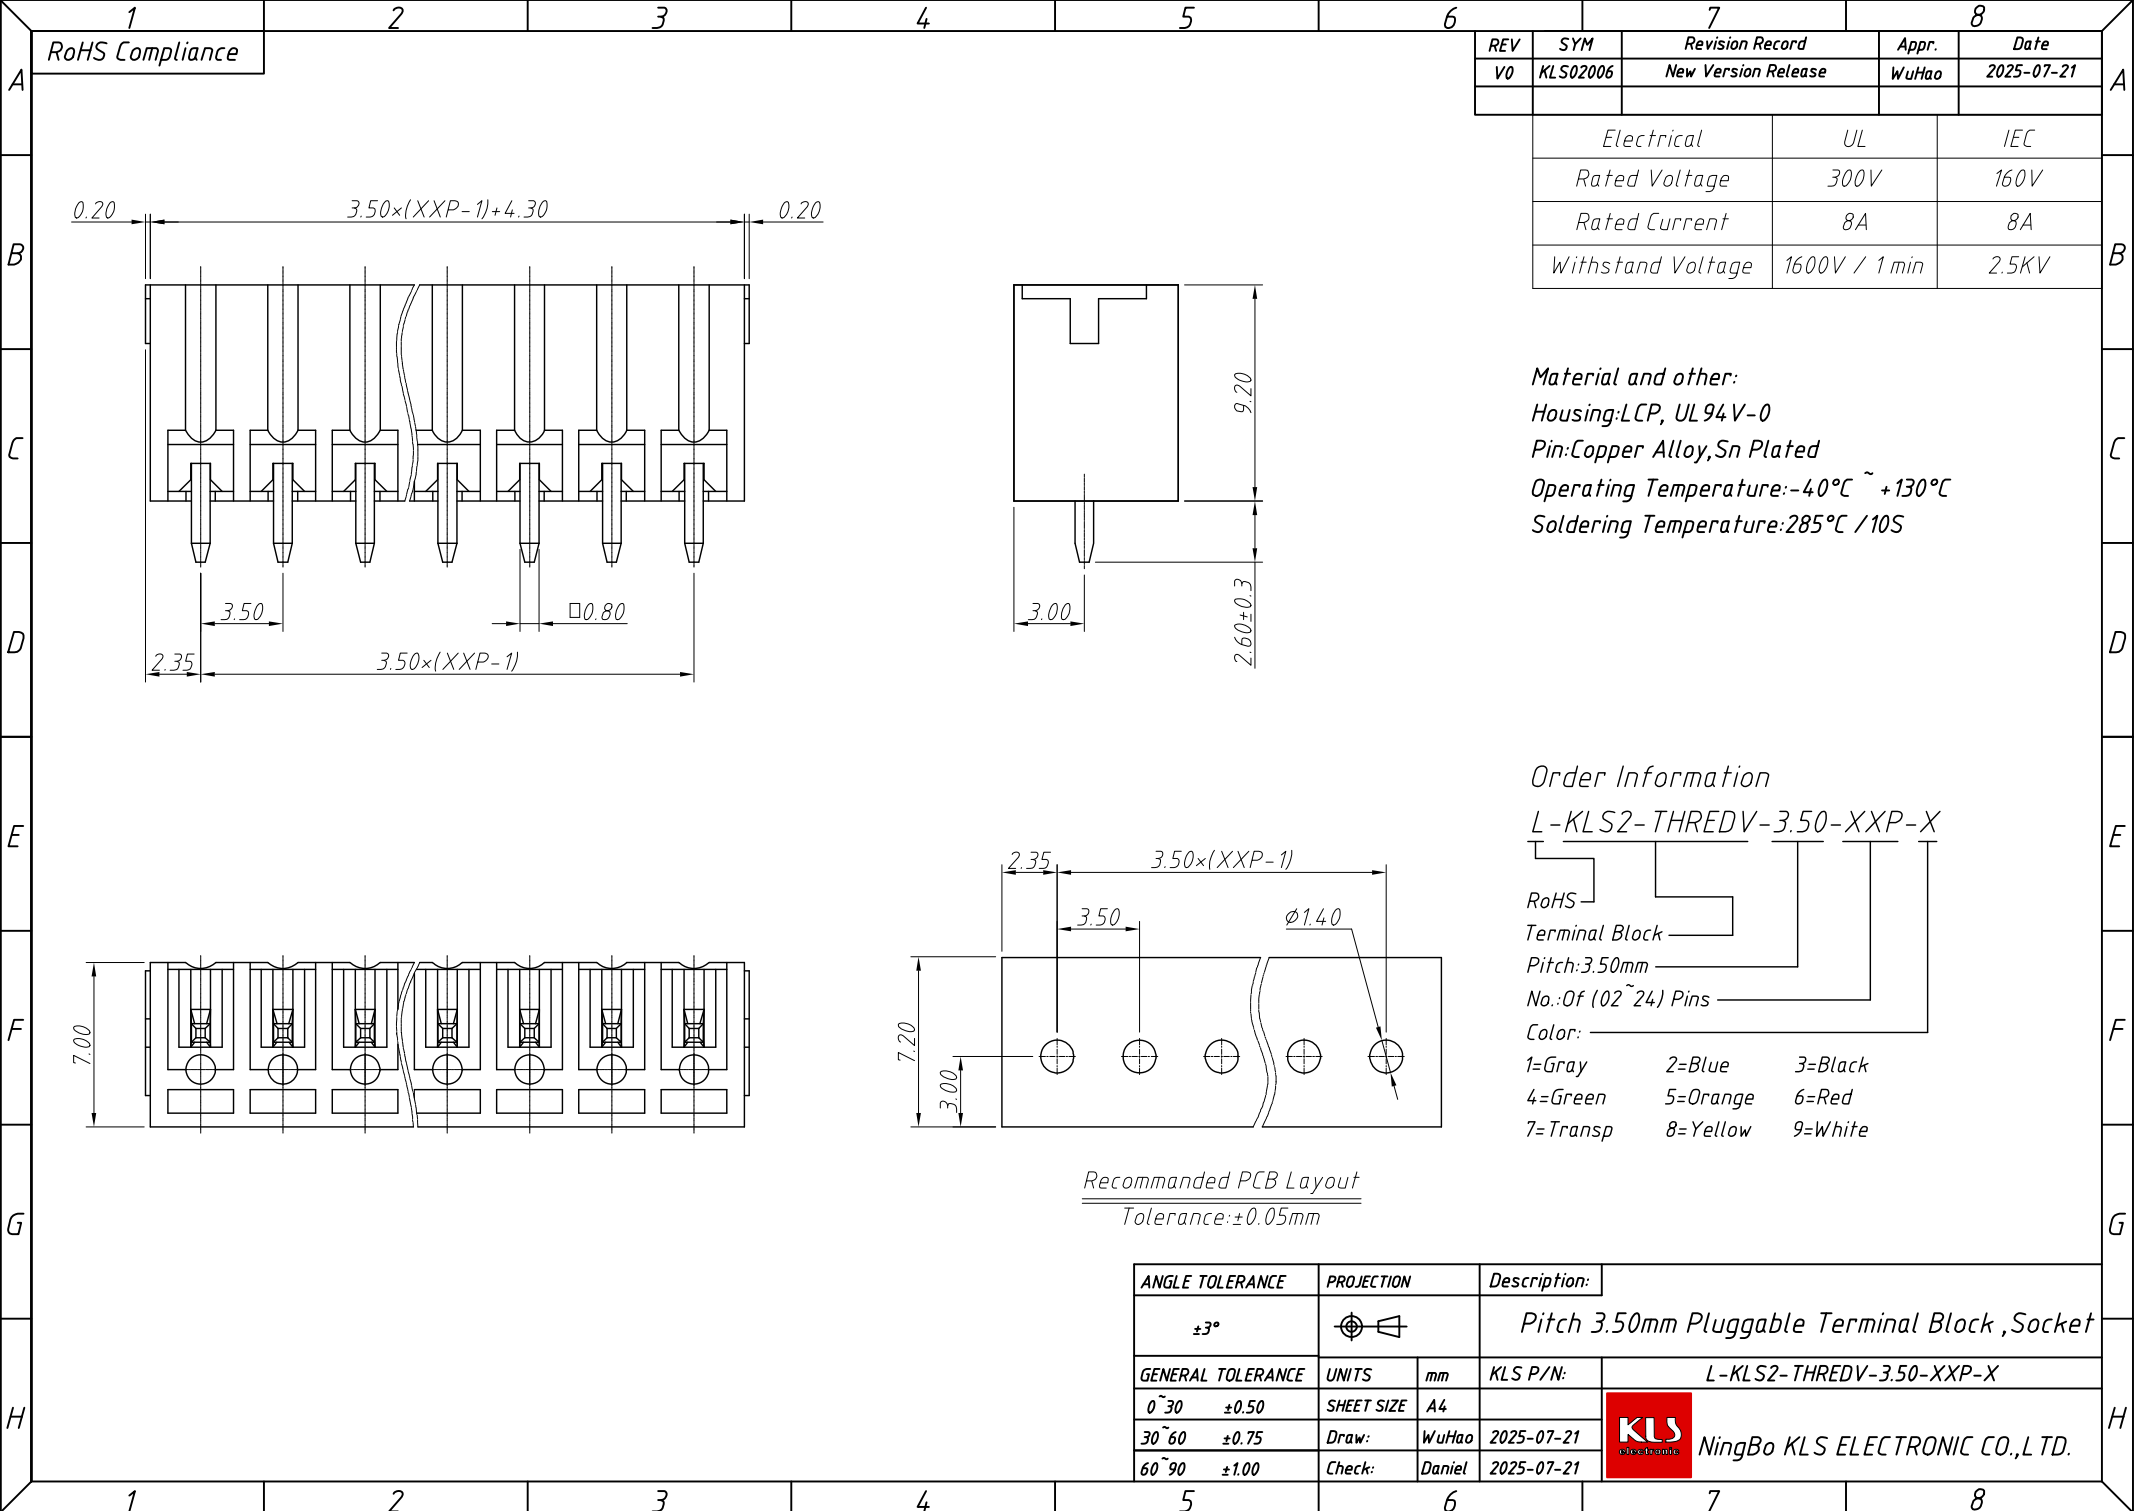

REV		SYM	Revision Record		Appr.	Date
V0		KLS02006	New Version Release		WuHao	2025-07-21
Electrical			UL		IEC	
Rated Voltage			300V		160V	
Rated Current			8A		8A	
Withstand Voltage			1600V / 1 min		2.5KV	

Material and other:
Housing:LCP, UL94V-0
Pin:Copper Alloy,Sn Plated
Operating Temperature:-40℃ ~ +130℃
Soldering Temperature:285℃ /10S

Order Information
L-KLS2-THREDV-3.50-XXP-X
RoHS
Terminal Block
Pitch:3.50mm
No.:Of (02~24) Pins
Color:
1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White

Recommended PCB Layout
Tolerance:±0.05mm

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Pitch 3.50mm Pluggable Terminal Block ,Socket	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS2-THREDV-3.50-XXP-X
0~30	±0.50	SHEET SIZE	A4		
30~60	±0.75	Draw:	WuHao	2025-07-21	NingBo KLS ELECTRONIC CO.,LTD.
60~90	±1.00	Check:	Daniel	2025-07-21	